

NOTICE INVITING TENDER (NIT)

FOR

PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2 WITH REQUIRED ACCESSORIES & DISMANTLING AS PER THE SCOPE OF WORK, FOR BYPL, DELHI (INDIA)

ON

TURNKEY BASIS

NIT NO CMC/BY/20-21/RB/SV/48

Due Date for Submission: 14.04.2021, 15:00 HRS

**BSES YAMUNA POWER LIMITED (BYPL)
SHAKTI KIRAN BUILDING, KARKARDOOMA,
DELHI-110032
CIN: U40109DL2001PLC111525
TEL: 011 3999 7111
WEBSITE: www.bsedelhi.com**

This document is a property of BYPL. This is not transferable and shall not be used for any purpose other than, for which it is supplied.

INDEX

S NO	DOCUMENT DESCRIPTION	PAGE NO
VOLUME – I		
1	INSTRUCTION TO BIDDER(ITB)	1 To 14
1.2	APPENDIX I (FORMAT FOR EMD BANK GUARANTEE)	1 To 09
1.2.1	FORMAT FOR EMD BANK GUARANTEE	
1.2.2	BID FORM	
1.2.3	ACCEPTANCE FORM FOR PARTICIPATION IN REVERSE AUCTION EVENT	
1.2.4	LITIGATION HISTORY, CURRENT CONTRACT COMMITMENTS / WORK IN PROGRESS, FINANCIAL DATA	
1.2.5	SCHEDULE OF CLARIFICATIONS/DEVIATIONS	
1.2.6	VENDOR CODE OF CONDUCT	
2	SPECIAL CONDITION OF CONTRACT	1 To 15
3	GENERAL CONDITION OF CONTRACT-SUPPLY	1 To 16
4	ERECTION CONDITION OF CONTRACT	1 To 26
5	CONTRACT HEALTH AND SAFETY PLAN	1 To 17
6	APPENDIX II	1 To 12
6.1	FORMAT OF ADVANCE BANK GUARANTEE	
6.2	FORMAT FOR PERFORMANCE BANK GUARANTEE	
6.3	BENEFICIARY'S BANK DETAIL WITH IFSC CODE	
6.4	FORMAT OF WARRANTY/GUARANTEE CERTIFICATE	
6.5	FORMAT FOR NO DEMAND CERTIFICATE AND LETTER OF INDEMNITY	
7	PRICE BID FORMATS (SUPPLY & SERVICES)	1 To 14
VOLUME – II – SCOPE OF WORK		1 To 16
VOLUME – III – TECHNICAL SPECIFICATIONS		1 To 124

VOLUME – I

INFORMATION TO BIDDER (ITB)

Table of Contents

VOLUME – I: INFORMATION TO BIDDER (ITB) 3

1.00 EVENT INFORMATION..... 3

2.00 QUALIFICATION CRITERIA..... 4

3.00 BIDDING AND AWARD PROCESS 5

3.01 BID SUBMISSION 5

3.02 TIME SCHEDULE 7

4.00 AWARD DECISION 8

5.00 MARKET INTEGRITY..... 9

6.00 SUPPLIER CONFIDENTIALITY..... 9

7.00 CONTACT INFORMATION 9

8.00 BID FORM 10

9.00 EMD 10

10.00 BID PRICES 10

11.00 BID CURRENCIES 11

12.00 PERIOD OF VALIDITY OF BIDS 11

13.00 ALTERNATIVE BIDS 11

14.00 FORMAT AND SIGNING OF BID 11

15.00 SEALING AND MARKING OF BIDS 11

16.00 DEADLINE FOR SUBMISSION OF BIDS 12

17.00 ONE BID PER BIDDER 12

18.00 LATE BIDS 12

19.00 MODIFICATIONS AND WITHDRAWAL OF BIDS 12

20.00 THE PURCHASER’S RIGHT TO ACCEPT ANY BID AND TO REJECT ANY OR ALL BIDS .. 12

21.00 AWARD OF CONTRACT 12

22.00 LETTER OF INTENT/ NOTIFICATION OF AWARD..... 13

23.00 CONTRACT PERFORMANCE BANK GAURANTEE 13

24.00 PACKAGE COMPLETION PERIOD (PROJECT) 13

25.00 GENERAL 13

<p>INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48</p>	<p>Page 2 of 14</p>	<p>Bidders seal & Signature</p>
--	---------------------	-------------------------------------

VOLUME – I: INFORMATION TO BIDDER (ITB)

1.00 EVENT INFORMATION

- 1.01 BSES Yamuna Power Ltd (hereinafter referred to as “**BYPL**”) invites sealed tenders in 2 envelopes for following scope of works:

Sr.	Scheme Description	Estimate Cost Value In INR	EMD Value In INR
1	SCHEME NO: EE20SH1009 PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2	2.59 Crore	5.18 Lakh

The bidder must qualify the requirements as specified in clause 2.0 stated below.

All envelopes shall be duly super scribed “NIT NO CMC/BY/20-21/RB/SV/48 - PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2”

Bid shall be submitted in two (02) parts. Details of part are as follow:

Part A – Techno Commercial Bid

Part B – Price Bid

- 1.1. The schedule of specifications with detail terms & conditions can be obtained from address given below against submission of non-refundable demand draft of **₹ 1,180/-** drawn in favour of BSES Yamuna Power Ltd, payable at Delhi. The tender documents & detail terms and conditions can also be downloaded from the website www.bsesselhi.com --> **BSES YAMUNA POWER LTD** --> **Tender --> Open Tenders**

In case tender papers are downloaded from the above website, then the bidder has to enclose a demand draft covering the cost of bid documents.

- 1.2. Bids will be received up to **14.04.2021, 15:00 PM.** at the address given below.
Part A of the Bid shall be opened on **15.04.2021, 14:00 PM.**

Part B of the Bid will be opened in case of Techno-Commercially qualified Bidders and the date of opening of same shall be intimated in due course. It is the sole responsibility of the bidder to ensure that the bid documents reach this office on or before the last date.

**Head of Department
Contracts & Materials Deptt.
BSES Yamuna Power Ltd
Ground Floor**

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

- 1.3 BSES Yamuna Power Ltd reserves the right to accept/reject any or all tenders without assigning any reason thereof in the event of following:
- a) Tender fee of requisite value.
 - b) Earnest Money Deposit (EMD) of of requisite value & validity is not deposited in shape of Bank Guarantee drawn in favor of BSES Yamuna Power Ltd, payable at Delhi or Online transfer of requisite amount through NEFT/RTGS.
 - c) The offer does not contain prices indicating break-up towards all taxes & duties in prescribed format.
 - d) Complete Technical details are not enclosed.
 - e) Tender is received after due date and time.
 - f) Technical offer contains any prices.
 - g) Prices are not FIRM and subject to Price Variation.

2.00 QUALIFICATION CRITERIA

The prospective bidder must qualify all of the following requirements and shall be eligible to participate in the bidding who meets following requirements and management has a right to disqualify those bidders who do not meet these requirements.

2.02 Technical Criteria:

SI No.	Criteria	Documents to be submitted by bidder
1	The bidder should have own manufacturing facility for 66KV 1CX1000 MM ² or higher voltage grade Power Cable from last 3 years.	Cable manufacturing and factory incorporation certificate
2	The bidder should have supplied at least 150 km of 66KV or higher grade cable in last 3 years to Utilities/SEB/PSU.	<ol style="list-style-type: none"> i. Summary list of executed Purchase orders ii. Purchase order copies iii. Material delivery clearance certificate copy
3	Bidder should have experience of turnkey execution including design, supply, installation, testing & commissioning project of 66KV or higher voltage grade cables in at least one utility/SEB/PSU having minimum 10 KM cable quantity in last 3 years.	<ol style="list-style-type: none"> i. Turnkey Purchase order/Work order copy ii. Work completion certificate copy
4	Performance certificate for minimum 1 year satisfactory performance from at least two utilities/SEB/PSUs of 66KV or higher voltage grade power cables, out of which one certificate should be of more than 10KM cable quantity.	Performance certificate
5	Bidder should have valid CPRI/ERDA Type test report of offered cable design as well as offered straight through joint and end termination joints.	Relevant Type test report

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 4 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

6	The bidder must possess valid ISO 9001:2015 certification or above.	Valid copy of Certification
7	The bidder should possess valid Electrical Contractor License issued by competent statutory agency to undertake work in NCT Delhi. In case bidder is not having this license, suitable sub-contractor having the valid license shall be engaged for works at site where copy of valid license shall be submitted to BYPL before the start of the work OR Bidder to give the undertaking that it will be obtained by them before the start of the work at site.	<ul style="list-style-type: none"> i. Electrical Contractor License Copy ii. Undertaking if not available

2.02 **Commercial Criteria:**

SI No.	Criteria	Documents to be submitted by bidder
1	The bidder must have adequate Financial Stability and status to meet the financial obligation pursuant to the scope of work and shall have average annual turnover of minimum Rs 200 Crore during last three (3) Financial Years (FY 2017-18, 2018-19 & 2019-20).	Duly certified CA certificate to be submitted
2	An undertaking (self-certificate) that the bidder has not been blacklisted/debarred by any central/state government institution including electricity boards.	Undertaking
3	The bidder should have registered under GST ACT and shall submit PAN, EPF and GST Registration Number, in addition to other statutory compliances. The bidder must submit the copy of registrations and submit an undertaking that the bidder shall comply all the statutory compliances as per the applicable laws/rules etc.	Relevant Statutory Documents Copy/ Undertaking

Notwithstanding anything stated above, BYPL reserves the right to assess bidder's capability to perform the contract, assess the capability and installed capacity of the Bidder for carrying out the supplies, should the circumstances warrant such assessment in the overall interest of the purchaser. In this regard the decision of the purchaser is final.

3.00 BIDDING AND AWARD PROCESS

Bidders are requested to submit their offer strictly in line with this tender document. **NO DEVIATION IS ACCEPTABLE.** BYPL shall response to the clarifications raised by various bidders and the will be distributed to all participating bidders through website.

3.01 BID SUBMISSION

Please mention our NIT Name & Number: - on the Tender and drop the same in our Tender Box placed at:

BSES Yamuna Power Ltd, Reception, Ground Floor, Shaktikiran Building, Karkardooma, Delhi 110032

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 14	Bidders seal & Signature
--	--------------	--------------------------

**The bids and the outer envelope shall be addressed to:
Head of Department
Contracts & Materials Deptt.
BSES Yamuna Power Ltd, Shaktikiran Building, Karkardooma, Delhi 110032**

Kindly Note:

- Bidder will inform BYPL through mail within 02 hours from the submission or before the due date & time of submission to TPC & Buyer:
 1. Mr Santosh Singh, E-mail: Santosh.Kum.Singh@relianceada.com,
 2. Mr Sumit Verma, E-mail: sumit.ra.verma@@relianceada.com,
- Tender documents shall be submitted at main gate in tender box
- Authorized person of TPC will collect the documents from tender box at scheduled time of tender submission and verify the bid documents with mails received. A confirmation of receipt shall be sent to bidder through mail by TPC on the same day
- Bidder has to ensure that tender copy is dropped in correct box designated for tender submission only
- BYPL shall not be responsible for any wrong placement of tender document by bidder

PART A :: TECHNICAL **BID** comprising of following:

Sr. No	Descriptions	Type of Documents
Commercial :		
1	Tender Fee - Demand Draft (Rs.1180/-) (Incl GST)	Non-refundable demand draft for Rs 1180/- in case the forms are downloaded from website
2	EMD	In prescribed format
3	Power-of-Attorney	In prescribed stamp paper & format
4	PQR Compliances	Documentary evidence in support of qualifying criteria like : <ol style="list-style-type: none"> 1. Details of constitution of the company (Proprietary/Limited/etc along with the details), Memorandum of Association of the company 2. Bidders shall submit the certified annual Balance sheets for the last completed three (3) financial years 3. Supportive document on Positive Net worth. Credit rating/solvency certificate from competent authority. 4. Copies of Orders, Execution /Performance Certificate & Other Documents to support qualification Criteria
5	Signed Tender document	Original Tender documents duly stamped & signed on each page as token of acceptance

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

Sr. No	Descriptions	Type of Documents
6	Black listing undertaking	Bidder should submit a Self undertaking signed by its Authorized Signatories that the Bidder or any of their sub contractor has not been blacklisted/banned by any Govt. Organization or Regulatory Agencies in India or abroad.
7	No litigation Certificate	Duly signed No Litigation Certificate as per attached format.
8	Commercial Terms and Conditions	Acceptance on Commercial Terms and Conditions viz Delivery schedule/period, Payment terms, PBG etc.
9	Acceptance on Reverse Auction	Duly signed Acceptance Form For Participation In Reverse Auction Event as per attached format
10	Bid Form (Unpriced) Duly Signed	Duly Signed Bid Form as per attached format
11	Un price Bid Duly Signed	Duly Signed Un price Bid as per attached format
Technical:		
12	Technical Details/ Filled in GTP/Drawings	Bidder shall submit duly filled GTP with all Technical documents and Drawings.
13	Field Quality and assurance Plan (QAP)	Bidder shall submit the detailed QAP plan in their technical proposal.
14	Type Test Reports	Bidders shall submit the copy of type test reports in their technical bids in support of PQR conditions
15	Project Implementation Plan and Methodology	Bidder shall submit detail Project Implementation plan and methodology in their technical bid.
16	Testing Facilities	Bidder shall submit the details of testing facilities available at their works/factory.
17	Organization Chart & Manpower Details.	Bidder shall submit the details of Manpower to be deployed for project management with qualification and experience.
18	List of Current Commitments/ Work In Progress.	Bidder shall submit the list of projects (Current Commitments/Work in Progress)

- PART B** :: **FINANCIAL BID** comprising of (01 original only)
- Price strictly in the Format enclosed indicating Break up of basic price, taxes & duties, transportation etc

3.02 TIME SCHEDULE

The bidders should complete the following within the dates specified as under:

S.No.	Steps	Due date
1	Last Date of Sale of Bid Documents	13.04.2021

S.No.	Steps	Due date
2	Date of Site Visit (If require)	06.04.2021, 10:00HRS
3	Pre-Bid Meeting	06.04.2021, 15:00HRS
4	Last Date of Queries, if any	06.04.2021, 17:00HRS
5	Last Date of Receipt of Bid Documents	14.04.2021, 15:00HRS
6	Date & Time of Opening of PART A - Technical and Commercial Bid	15.04.2021, 14:00HRS

This is a two part bid process. Bidders are to submit the bids in 2(Two) parts
Both these parts should be furnished in separate sealed covers super scribing NIT no. DUE DATE OF SUBMISSION, with particulars as **PART-A TECHNICAL BID & COMMERCIAL TERMS & CONDITIONS** and **Part-B FINANCIAL BID** and these sealed envelopes should again be placed in another sealed cover which shall be submitted before the due date & time specified.

Part – A:: Technical Bid should not contain any cost information whatsoever and shall be submitted within the due date.

PART B:: This envelope will be opened internally after techno-commercial evaluation and only of the qualified bidders.

Bidder has to submit the item wise price bifurcation in bid. Un priced copy must be attached with the Part A (Technical Bid). Reverse Auction will be carried out on Lump sum Basis/Total Landed Cost i.e. Supply + Services

REVERSE AUCTION CLAUSE :: Purchaser reserves the right to use reverse auction as optional tool through SAP – SRM as an integral part of the entire tendering process. All techno-commercially qualified bidders shall participate in reverse auction.

Notwithstanding anything stated above, the Purchaser reserves the right to assess bidder's capability to perform the contract, should the circumstances warrant such assessment in the overall interest of the purchaser. In this regard the decision of the purchaser is final. Bidder to submit their acceptance as per format attached ANNEXURE-C

Bidder shall bids for one or more packages, however bid to be submitted for complete package comprising of Supply, Installation, testing and Commissioning of Grid, In-feed and Outgoing feeders as per scope of work/ BOQ of respective package for each and every items & activities.

BIDS RECEIVED AFTER DUE DATE AND TIME MAY BE LIABLE TO REJECTION

4.00 AWARD DECISION

4.01 Purchaser intends to award the business on a lowest bid basis, so suppliers are encouraged to submit the bid competitively. The decision to place purchase order/LOI solely depends on purchaser on the cost competitiveness across multiple lots, quality, delivery and bidder's capacity, in addition to other factors that Purchaser may deem relevant.

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 14	Bidders seal & Signature
--	--------------	--------------------------

- 4.02 In the event of your bid being selected by purchaser (and / or its affiliates) and you subsequent DEFAULT on your bid; you will be required to pay purchaser (and / or its affiliates) an amount equal to the difference in your bid and the next lowest bid on the quantity declared in NIT/RFQ.
- 4.03 In case any bidder is found unsatisfactory during the Project execution, the award will be cancelled and BYPL reserves the right to award other bidders who are found fit.
- 4.05 The purchaser reserves all the rights to award the contract to one or more bidders so as to meet the Project execution requirement or nullify the award decision without citing any reason.
- 4.06 Qty Variation: The purchaser reserves the rights to vary the quantities as per the actual requirements.

5.00 MARKET INTEGRITY

We have a fair and competitive marketplace. The rules for bidders are outlined in the Terms & Conditions. Bidders must agree to these rules prior to participating. In addition to other remedies available, we reserves the right to exclude a bidder from participating in future markets due to the bidder's violation of any of the rules or obligations contained in the Terms & Condition. Bidders who violate the marketplace rules or engage in behavior that disrupts the fair execution of the marketplace restricts a bidder to length of time, depending upon the seriousness of the violation. Examples of violations include, but are not limited to:

- Failure to honor prices submitted to the marketplace.
- Breach of the terms of the published in Request For Quotation/NIT.

6.00 SUPPLIER CONFIDENTIALITY

All information contained in this RFQ is confidential and shall not be disclosed, published or advertised in any manner without written authorization from BYPL. This includes all bidding information submitted.

All RFQ documents remain the property of BYPL and all suppliers are required to return these documents to BYPL upon request.

Suppliers who do not honor these confidentiality provisions will be excluded from participating in future bidding events.

7.00 CONTACT INFORMATION

Technical clarification, if any, as regards this RFQ shall be sought in writing and sent by post/courier to following address. The same shall not be communicated through phone

Address	Name/ Designation	E-mail Address
Technical		
CES Dept. 3 rd Floor, B-Block, BSES Yamuna Power Ltd Shaktikiran Building, Karkardooma, Delhi 110032	Gaurav Sharma AVP (HOD-CES)	gaurav.a.sharma@relianceada.com
	Puneet Duggal DGM (CES)	puneet.duggal@relianceada.com
	Abhishek Vashistha DGM (CES)	abhishek.vashistha @relianceada.com

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

Commercial		
C&M Dept. 3 rd Floor, A-Block, BSES Yamuna Power Ltd Shaktikiran Building, Karkardooma, Delhi 110032	Rakesh Bansal VP (HOD-C&M)	rakesh.bansal@relianceada.com
	Rajesh Srivastava VP (Head-Procurement)	rajesh.r.srivastava@relianceada.com
	Sumit Verma DGM (C&M)	sumit.ra.verma@relianceada.com

8.00 BID FORM

The Bidder shall submit one "Original", "Soft Copy- 1", of the Un price Bid Form, Supporting Documents & Technical Data Sheets duly filled in as per attached specification/BOM etc enclosed.

9.00 EMD

The bidder shall furnish, as part of its bid, an EMD amounting as specified in the RFQ. The EMD is required to protect the Purchaser against the risk of Bidder's conduct which would warrant forfeiture.

The EMD shall be denominated in any of the following form:

- (a) Bank Guarantee drawn in favour of BSES Yamuna Power Ltd, payable at Delhi.
- (b) EMD shall be valid for One Hundred Eighty (180) days after due date of submission or amended due date of submission drawn in favour of BSES Yamuna Power Ltd.

The EMD may be forfeited in case of:

- (a) the Bidder withdraws its bid during the period of specified bid validity

or
- (b) the case of a successful Bidder, if the Bidder does not
 - (i) accept the Purchase Order, or
 - (ii) furnish the required contract performance BG.

10.00 BID PRICES

10.01 Bidders shall quote for the entire Scope of Supply/Work with a break-up of prices for individual items and Taxes & Duties. The total Bid Price shall also cover all the Supplier's obligations mentioned in or reasonably to be inferred from the Bidding Documents in respect of Design, Supply, Transportation to site, all in accordance with the requirement of Bidding Documents. The Bidder shall complete the appropriate Price Schedules included herein, stating the Unit Price for each item & total Price with taxes, duties & freight upto destination.

10.02 The prices offered shall be inclusive of all costs as well as Duties, Taxes and Levies paid or payable during execution of the supply work, breakup of price constituents, should be there.

10.03 Prices quoted by the Bidder shall be "**Firm**" and not subject to any price adjustment during the performance of the Contract. **A Bid submitted with an adjustable price/ Price Variation**

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

Clause will be treated as non-responsive and rejected.

10.04 The qty break-up shown else-where in Price Schedule is tentative. The bidder shall ascertain himself regarding material required for completeness of the entire work. Any item not indicated but is required to complete the job, shall be deemed to be included in the prices quoted.

10.05 The format for price bid is attached as Annexure B.

11.00 BID CURRENCIES

11.01 Prices shall be quoted in Indian Rupees Only.

12.00 PERIOD OF VALIDITY OF BIDS

12.01 Bids shall remain valid for 180 days from the due date of submission of the Bid & subsequent corrigendum/amendment/extension of due date of submission.

12.02 Notwithstanding Clause above, the Purchaser may solicit the Bidder's consent to an extension of the Period of Bid Validity. The request and the responses thereto shall be made in writing and sent by post/courier/e-mail.

13.00 ALTERNATIVE BIDS

13.01 Bidders shall submit Bids, which comply with the Bidding Documents. Alternative Bids will not be considered. The attention of Bidders is drawn to the provisions regarding the rejection of Bids in the terms and conditions, which are not substantially responsive to the requirements of the Bidding Documents.

14.00 FORMAT AND SIGNING OF BID

14.01 The original Bid Form and accompanying documents, clearly marked "Original Bid" plus copy1, must be received by the Purchaser at the date, time and place specified pursuant to Clauses 15.0 and 16.0. In the event of any discrepancy between the original and the copies, the original shall govern.

14.02 The original and copies of the Bid shall be typed or written in indelible ink and shall be signed by the Bidder or a person or persons duly authorized to sign on behalf of the Bidder. Such authorization shall be indicated by written Power-of-Attorney accompanying the Bid.

14.03 The Bid shall contain no interlineations, erasures or overwriting except as necessary to correct errors made by the Bidder, in which case such corrections shall be initialed by the person or persons signing the Bid.

15.00 SEALING AND MARKING OF BIDS

15.01 Bid submission: One original, & soft copy1 of all the Bid Documents shall be sealed and submitted to the Purchaser before the closing time for submission of the bid.

15.02 The Technical Documents and the EMD shall be enclosed in a sealed envelope and the said envelope shall be superscribed with —"Technical & EMD". The price bid shall be inside another sealed

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

envelope with superscribed "Financial Bid". Both these envelopes shall be sealed inside another big envelope. All the envelopes should bear the Name and Address of the Bidder and marking for the Original, & copy1. The envelopes should be superscribed with —"Tender Notice No. & Due date of opening".

- 15.03 The Bidder has the option of sending the Bids in person. Bids submitted by Email/Telex/Telegram /Fax will be rejected. No request from any Bidder to the Purchaser to collect the proposals from Courier/Airlines/Cargo Agents etc shall be entertained by the Purchaser.

16.00 DEADLINE FOR SUBMISSION OF BIDS

- 16.01 The original Bid, together with the required copies, must be received by the Purchaser at the address specified earlier.
- 16.02 The Purchaser may, at its discretion, extend the deadline for the submission of Bids by amending the Bidding Documents, in which case all rights and obligations of the Purchaser and Bidders previously subject to the deadline will there after be subject to the deadline as extended.

17.00 ONE BID PER BIDDER

- 17.01 Each Bidder shall submit only one Bid by itself. **Joint Venture/consortium is not acceptable.** A Bidder who submits or participates in more than one Bid will cause all those Bids to be rejected.

18.00 LATE BIDS

- 18.01 Any Bid received by the Purchaser after the deadline for submission of Bids prescribed by the Purchaser, pursuant to Clause 16.0, will be declared "Late" and may be rejected and returned unopened to the Bidder.

19.00 MODIFICATIONS AND WITHDRAWAL OF BIDS

- 19.01 The Bidder is not allowed to modify or withdraw its Bid after the Bid's submission.

20.00 THE PURCHASER'S RIGHT TO ACCEPT ANY BID AND TO REJECT ANY OR ALL BIDS

- 20.01 The Purchaser reserves the right to accept or reject any Bid and to annul the Bidding process and reject all Bids at anytime prior to award of Contract, without thereby incurring any liability to the affected Bidder or Bidders or any obligation to inform the affected Bidder or Bidders of the grounds for the Purchaser's action.

21.00 AWARD OF CONTRACT

The Purchaser will award the Contract to the successful Bidder whose Bid has been Determined to be the lowest-evaluated responsive Bid, provided further that the Bidder has been determined to be qualified to satisfactorily perform the Contract. Purchaser reserves the right to award order to other bidders in the tender, provided it is required for timely execution of project & provided he agrees to come to the lowest rate.

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

22.00 LETTER OF INTENT/ NOTIFICATION OF AWARD

The letter of intent/ Notification of Award shall be issued to the successful Bidder whose bids have been considered responsive, techno-commercially acceptable and evaluated to be the lowest (L1). The successful Bidder shall be required to furnish a letter of acceptance within 7 days of issue of the letter of intent /Notification of Award by Purchaser. The date of LOI/LOA shall be treated as Start date of Project.

23.00 CONTRACT PERFORMANCE BANK GAURANTEE

Within 15 days of the receipt of Notification of Award/ Letter of Intent/PO from the Purchaser, the successful Bidder shall furnish Contract Performance Bank Guarantee towards faithful performance of Contract for an amount of 10% (Ten percent) of the Contract Price. The Performance Bond shall be valid upto completion period/handing over, whichever is earlier plus 3 months claim period. Upon submission of the performance security, the EMD shall be released. 03 (three) nos. separate CPBG's shall be submitted against Supply, ETC & Civil Contract.

24.00 PACKAGE COMPLETION PERIOD (PROJECT)

24.01 Vendor require to complete the project as per package wise schedule as under

Scheme Number	Package Name	Total Months for Handing over of the Package, From Zero Date	Total No. of Day for Handing over of the Package From Zero Date
EE20SH1009	PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2	4 months	120 days

25.00 GENERAL

All the Bids shall be prepared and submitted in accordance with these instructions.

- 25.01 Bidder shall bear all costs associated with the preparation and delivery of its Bid, and the Purchaser will in no case shall be responsible or liable for these costs.
- 25.02 The Bid should be submitted by the Bidder in whose name the bid document has been issued and under no circumstances it shall be transferred /sold to any other party.
- 25.03 The Purchaser reserves the right to request for any additional information and also reserves the right to reject the proposal of any Bidder, if in the opinion of the Purchaser, the data in support of NIT requirement is incomplete.

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

25.04 The Bidder is expected to examine all instructions, forms, terms & conditions and specifications in the Bid Documents. Failure to furnish all information required in the Bid Documents or submission of a Bid not substantially responsive to the Bid Documents in every respect may result in rejection of the Bid. However, the Purchaser's decision in regard to the responsiveness and rejection of bids shall be final and binding without any obligation, financial or otherwise, on the Purchaser.

INFORMATION TO BIDDER (ITB) NIT NO: CMC/BY/20-21/RB/SV/48	Page 14 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

APPENDIX I

(FORMAT FOR EMD BANK GUARANTEE)

(To be issued in a Non Judicial Stamp Paper of Rs.50/-purchased in the name of the bank)

Whereas [*name of the Bidder*] (herein after called the "Bidder") has submitted its bid dated [*date of submission of bid*] for the supply of [*name and/or description of the goods*] (here after called the "Bid").

KNOW ALL PEOPLE by these presents that WE [*name of bank*] at [*Branch Name and address*],having our registered office at [*address of the registered office of the bank*](herein after called the "Bank"),are bound unto BSES Yamuna Power Ltd., with it's Corporate Office at Shaktikiran Building, Karkardooma, Delhi - 110032, (herein after called —the "Purchaser")in the sum of Rs..... (Rupees..... only) for which payment well and truly to be made to the said Purchaser, the Bank binds itself, its successors, and assigns by these presents.

Sealed with the Common Seal of the said Bank this_____ day of _____ 20_____.

The conditions of this obligation are:

- 1 If the Bidder withdraws its Bid during the period of bid validity specified by the Bidder on the Bid Form ; or
2. If the Bidder, having been notified of the acceptance of its Bid by the Purchaser during the period of bid validity:
 - (a) fails or refuses to execute the Contract Form ,if required; or
 - (b) fails or refuses to furnish the performance security, In accordance with the Instructions to Bidders/ Terms and Conditions;

We undertake to pay to the Purchaser up to the above amount upon receipt of its first written demand, without the Purchaser having to substantiate its demand, provided that is its demand the purchaser will note that amount claimed by it is due to it, owing to the occurrence of one or both of the two condition(s), specifying the occurred condition or condition(s).

This guarantee will remain in force up to and including One Hundred Eighty (180) days after the due date of submission bid, and any demand in respect thereof should reach the Bank not later than the above date.

(Stamp & signature of the bank)

Signature of the witness

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 1 of 9	Bidders seal & Signature
---	-------------	--------------------------



BID FORM

To

Head of Department
Contracts & Material Deptt.
BSES Yamuna Power Ltd
Shaktikiran Building, Karkardooma,
Delhi 110032

Sir,

1 We understand that BYPL is desirous of procuring..... for it's licensed distribution network area in Delhi

2 Having examined the Bidding Documents for the above named works, we the undersigned, offer to deliver the goods in full conformity with the Terms and Conditions and technical specifications for the sum indicated in Price Bid or such other sums as may be determined in accordance with the terms and conditions of the contract .The amounts are in accordance with the Price Schedules attached herewith and are made part of this bid.

3 If our Bid is accepted, we under take to deliver the entire goods as) as per delivery schedule mentioned in Section IV from the date of award of purchase order/letter of intent.

4 If our Bid is accepted, we will furnish a performance bank guarantee for an amount of 10% (Ten)percent of the total contract value for due performance of the Contract in accordance with the Terms and Conditions.

5 We agree to abide by this Bid for a period of 180 days from the due date of bid submission and it shall remain binding upon us and may be accepted at any time before the expiration of that period.

6 We declare that we have studied the provision of Indian Laws for supply of equipments/materials and the prices have been quoted accordingly.

7 Unless and until Letter of Intent is issued, this Bid, together with your written acceptance there of, shall constitute a binding contract between us.

8 We understand that you are not bound to accept the lowest, or any bid you may receive.

9 There is provision for Resolution of Disputes under this Contract, in accordance with the Laws and Jurisdiction of Contract.

Dated this..... day of..... 20

Signature..... In the capacity of

.....duly authorized to sign for and on behalf of

(IN BLOCK CAPITALS)

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 2 of 9	Bidders seal & Signature
---	-------------	--------------------------

ACCEPTANCE FORM FOR PARTICIPATION IN REVERSE AUCTION EVENT

(To be signed and stamped by the bidder)

BSES Yamuna Power Ltd (hereinafter referred to as "**BYPL**") intends to use the reverse auction through SAP-SRM tool as an integral part of the entire tendering process. All the bidders who are found as techno commercial qualified based on the tender requirements shall be eligible to participate in the reverse auction event.

The following terms and conditions are deemed as accepted by the bidder on participation in the bid event:

1. BYPL shall provide the user id and password to the authorized representative of the bidder. (Authorization letter in lieu of the same be submitted along with the signed and stamped acceptance form)
2. BYPL will make every effort to make the bid process transparent. However, the award decision by BYPL would be final and binding on the bidder.
3. The bidder agrees to non-disclosure of trade information regarding the purchase, identity of BYPL, bid process, bid technology, bid documentation, bid details, and etc.
4. The bidder is advised to understand the auto bid process to safeguard themselves against any possibility of non-participation in the auction event.
5. In case of bidding through internet medium, bidders are further advised to ensure availability of the entire infrastructure as required at their end to participate in the auction event. Inability to bid due to telephone line glitch, internet response issues, software or hardware hangs; power failure or any other reason shall not be the responsibility of BYPL.
6. In case of intranet medium, BYPL shall provide the infrastructure to bidders, further, BYPL has sole discretion to extend or restart the auction event in case of any glitches in infrastructure observed which has restricted the bidders to submit the bids to ensure fair & transparent competitive bidding. In case of an auction event is restarted, the best bid as already available in the system shall become the start price for the new auction.
7. In case the bidder fails to participate in the auction event due any reason whatsoever, it shall be presumed that the bidder has no further discounts to offer and the initial bid as submitted by the bidder as a part of the tender shall be considered as the bidder's final no regret offer. Any offline price bids received from a bidder in lieu of non-participation in the auction event shall be out rightly rejected by BYPL.
8. The bidder shall be prepared with competitive price quotes on the day of the reverse auction event.
9. The prices as quoted by the bidder during the auction event shall be inclusive of all the applicable taxes, duties and levies and shall be FOR Landed Cost basis at BYPL site.
10. The prices submitted by a bidder during the auction event shall be binding on the bidder.
11. No requests for time extension of the auction event shall be considered by BYPL.
12. The original price bids of the bidders shall be reduced on pro-rata basis against each line item based on the final all inclusive prices offered during conclusion of the auction event for arriving at contract amount.

Signature & seal of the Bidder

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 9	Bidders seal & Signature
---	---------------------------	--------------------------

LITIGATION HISTORY

Year	Name of client	Details of contract & date	Cause of Litigation/arbitration and dispute	Disputed amount

CURRENT CONTRACT COMMITMENTS / WORK IN PROGRESS

Year	Name of client	Details of contract & date	Value of outstanding work	Estimated completion date

FINANCIAL DATA

(Duly Certified by Chartered Accountant)

	Actual in previous 5 financial years				
	FY 19-20	FY 18-19	FY 17-18	FY 16-17	FY 15-16
Total assets					
Current assets					
Total Liability					
Current Liability					
Profit before taxes					
Profit after taxes					

ANNEXURE - SCHEDULE OF DEVIATIONS

Vendor shall refrain from taking any deviations on this TENDER. Still in case of any deviations, all such deviations from this tender shall be set out by the Bidder, Clause by Clause in this schedule and submit the same as a part of the Technical Bid.

Unless **specifically** mentioned in this schedule, the tender shall be deemed to confirm the BYPL's specifications:

SL NO	Clause No.	Page No.	NIT Clause descriptions	Details of Clarification/deviation with justifications

VENDOR CODE OF CONDUCT

Purchaser is committed to conducting its business in an ethical, legal and socially responsible manner. To encourage compliance with all legal requirements and ethical business practices, Purchaser has established this Vendor Code of Conduct (the "Code") for Purchaser's Vendors. For the purposes of this document, "Vendor" means any company, corporation or other entity that sells, or seeks to sell goods or services, to Purchaser, including the Vendor's employees, agents and other representatives.

Fundamental to adopting the Code is the understanding that a business, in all of its activities, must operate in full compliance with the laws, rules and regulations of the countries in which it operates. This Code encourages Vendors to go beyond legal compliance, drawing upon internationally recognized standards, in order to advance social and environmental responsibility.

I. Labour and Human Rights

Vendors must uphold the human rights of workers, and treat them with dignity and respect as understood by the international community.

- . Fair Treatment - Vendors must be committed to a workplace free of harassment. Vendors shall not threaten workers with or subject them to harsh or inhumane treatment, including sexual harassment, sexual abuse, corporal punishment, mental coercion, physical coercion, verbal abuse or unreasonable restrictions on entering or exiting company provided facilities.

- . Antidiscrimination - Vendors shall not discriminate against any worker based on race, colour, age, gender, sexual orientation, ethnicity, disability, religion, political affiliation, union membership, national origin, or marital status in hiring and employment practices such as applications for employment, promotions, rewards, access to training, job assignments, wages, benefits, discipline, and termination. Vendors shall not require a pregnancy test or discriminate against pregnant workers except where required by applicable laws or regulations or prudent for workplace safety. In addition, Vendors shall not require workers or potential workers to undergo medical tests that could be used in a discriminatory way except where required by applicable law or regulation or prudent for workplace safety.

- . Freely Chosen Employment - Forced, bonded or indentured labour or involuntary prison labour is not to be used. All work will be voluntary, and workers should be free to leave upon reasonable notice. Workers shall not be required to hand over government-issued identification, passports or work permits as a condition of employment.

- . Prevention of Under Age Labor - Child labor is strictly prohibited. Vendors shall not employ children. The minimum age for employment or work shall be 15 years of age, the minimum age for employment in that country, or the age for completing compulsory education in that country, whichever is higher. This Code does not prohibit participation in legitimate workplace apprenticeship programs that are consistent with Article 6 of ILO Minimum Age Convention No. 138 or light work consistent with Article 7 of ILO Minimum Age Convention No. 138.

- . Juvenile Labor - Vendors may employ juveniles who are older than the applicable legal minimum age for employment but are younger than 18 years of age, provided they do not perform work likely to jeopardize their health, safety, or morals, consistent with ILO Minimum Age Convention No. 138.

- . Minimum Wages - Compensation paid to workers shall comply with all applicable wage laws, including those relating to minimum wages, overtime hours and legally mandated benefits. Any Disciplinary wage deductions are to conform to local law. The basis on which workers are being paid is to be clearly conveyed to them in a timely manner.

- . Working Hours - Studies of good manufacturing practices clearly link worker strain to reduced productivity, increased turnover and increased injury and illness. Work weeks are not to exceed maximum set by local law. Further, a work week should not be more than 60 hours per week, including overtime,

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 9	Bidders seal & Signature
---	-------------	--------------------------

except in emergency or unusual situations. Workers should be allowed at least one day off per seven-day week.

. Freedom of Association - Open communication and direct engagement between workers and management are the most effective ways to resolve workplace and compensation issues. Vendors are to respect the rights of workers to associate freely and to communicate openly with management regarding working conditions without fear of reprisal, intimidation or harassment. Workers' rights to join labour unions seek representation and or join worker's councils in accordance with local laws should be acknowledged.

II. Health and Safety

Vendors must recognize that in addition to minimizing the incidence of work-related injury and illness, a safe and healthy work environment enhances the quality of products and services, consistency of production and worker retention and morale. Vendors must also recognize that ongoing worker input and education is essential to identifying and solving health and safety issues in the workplace.

The health and safety standards are:

. Occupational Injury and Illness - Procedures and systems are to be in place to prevent, manage, track and report occupational injury and illness, including provisions to: a) encourage worker reporting; b) classify and record injury and illness cases; c) provide necessary medical treatment; d) investigate cases and implement corrective actions to eliminate their causes; and e) facilitate return of workers to work.

. Emergency Preparedness - Emergency situations and events are to be identified and assessed, and their impact minimized by implementing emergency plans and response procedures, including: emergency reporting, employee notification and evacuation procedures, worker training and drills, appropriate fire detection and suppression equipment, adequate exit facilities and recovery plans.

. Occupational Safety - Worker exposure to potential safety hazards (e.g., electrical and other energy sources, fire, vehicles, and fall hazards) are to be controlled through proper design engineering and administrative controls, preventative maintenance and safe work procedures (including lockout/tagout), and ongoing safety training. Where hazards cannot be adequately controlled by these means, workers are to be provided with appropriate, well-maintained, personal protective equipment. Workers shall not be disciplined for raising safety concerns.

. Machine Safeguarding - Production and other machinery is to be evaluated for safety hazards. Physical guards, interlocks and barriers are to be provided and properly maintained where machinery presents an injury hazard to workers.

.Industrial Hygiene - Worker exposure to chemical, biological and physical agents is to be identified, evaluated, and controlled. Engineering or administrative controls must be used to control overexposures. When hazards cannot be adequately controlled by such means, worker health is to be protected by appropriate personal protective equipment programs.

.Sanitation, Food, and Housing - Workers are to be provided with ready access to clean toilet, facilities potable water and sanitary food preparation, storage, and eating facilities. Worker dormitories provided by the Participant or a labour agent are to be maintained clean and safe, and provided by the Participant or a labour agent, hot water for bathing and showering, and adequate heat and ventilation and reasonable personal space along with reasonable entry and exit privileges.

. Physically Demanding Work - Worker exposure to the hazards of physically demanding tasks, including manual material handling and heavy or repetitive lifting, prolonged standing and highly repetitive or forceful assembly tasks is to be identified, evaluated and controlled.

III. Environmental

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 7 of 9	Bidders seal & Signature
---	-------------	--------------------------



Vendors should recognize that environmental responsibility is integral to producing world class products. In manufacturing operations, adverse effects on the environment and natural resources are to be minimized while safeguarding the health and safety of the public.

The environmental standards are:

- . Product Content Restrictions - Vendors are to adhere to applicable laws and regulations regarding prohibition or restriction of specific substances including labeling laws and regulations for recycling and disposal. In addition, Vendors are to adhere to all environmental requirements specified by Purchaser.
- . Chemical and Hazardous Materials -Chemical and other materials posing a hazard if released to the environment are to be identified and managed to ensure their safe handling, movement storage, recycling or reuse and disposal.
- . Air Emissions - Air emissions of volatile organic chemicals, aerosols, corrosives, particulates, ozone depleting chemicals and combustion by-products generated from operations are to be characterized, monitored, controlled and treated as required prior to discharge.
- . Pollution Prevention and Resource Reduction -Waste of all types, including water and energy, are to be reduced or eliminated at the source or by practices such as modifying production, maintenance and facility processes, materials substitution, conservation, recycling and re-using materials.
- . Wastewater and Solid Waste - Wastewater and solid waste generated from operations industrial processes and sanitation facilities are to be monitored, controlled and treated as required prior to discharge or disposal.
- . Environmental Permits and Reporting - All required environmental permits (e.g. discharge monitoring) and registrations are to be obtained, maintained and kept current and their operational and reporting requirements are to be followed.

IV. Ethics

Vendors must be committed to the highest standards of ethical conduct when dealing with workers, Vendors, and customers.

- . Corruption, Extortion, or Embezzlement - Corruption, extortion, and embezzlement, in any form, are strictly prohibited. Vendors shall not engage in corruption, extortion or embezzlement in any form and violations of this prohibition may result in immediate termination as an Vendor and in legal action.
- . Disclosure of Information - Vendors must disclose information regarding its business activities, structure financial situation, and performance in accordance with applicable laws and regulations and prevailing industry practices.
- . No Improper Advantage - Vendors shall not offer or accept bribes or other means of obtaining undue or improper advantage.
- . Fair Business, Advertising, and Competition - Vendors must uphold fair business standards in advertising, sales, and competition.
- . Business Integrity - The highest standards of integrity are to be expected in all business interactions. Participants shall prohibit any and all forms of corruption, extortion and embezzlement. Monitoring and enforcement procedures shall be implemented to ensure conformance.
- . Community Engagement - Vendors are encouraged to engage the community to help foster social and economic development and to contribute to the sustainability of the communities in which they operate.
- . Protection of Intellectual Property - Vendors must respect intellectual property rights; safeguard customer information; and transfer of technology and know-how must be done in a manner that protects intellectual property rights.

V. Management System

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 9	Bidders seal & Signature
---	---------------------------	--------------------------

Vendors shall adopt or establish a management system whose scope is related to the content of this Code. The management system shall be designed to ensure (a) compliance with applicable laws, regulations and customer requirements related to the Vendors' operations and products; (b) conformance with this Code; and (c) identification and mitigation of operational risks related to this Code. It should also facilitate continual improvement.

The management system should contain the following elements:

- . Company Commitment - Corporate social and environmental responsibility statements affirming Vendor's commitment to compliance and continual improvement.
- . Management Accountability and Responsibility - Clearly identified company representative[s] responsible for ensuring implementation and periodic review of the status of the management systems.
- . Legal and Customer Requirements - Identification, monitoring and understanding of applicable laws, regulations and customer requirements.
- . Risk Assessment and Risk Management - Process to identify the environmental, health and safety and labour practice risks associated with Vendor's operations. Determination of the relative significance for each risk and implementation of appropriate procedural and physical controls to ensure regulatory compliance to control the identified risks.
- . Performance Objectives with Implementation Plan and Measures - Areas to be included in a risk assessment for health and safety are warehouse and storage facilities, plant/facilities support equipment, laboratories and test areas, sanitation facilities (bathrooms), kitchen/cafeteria and worker housing /dormitories. Written standards, performance objectives, and targets an implementation plans including a periodic assessment of Vendor's performance against those objectives.
- . Training - Programs for training managers and workers to implement Vendor's policies, procedures and improvement objectives.
- . Communication - Process for communicating clear and accurate information about Vendor's performance, practices and expectations to workers, Vendors and customers.
- . Worker Feedback and Participation - Ongoing processes to assess employees' understanding of and obtain feedback on practices and conditions covered by this Code and to foster continuous improvement.
- . Audits and Assessments - Periodic self-evaluations to ensure conformity to legal and regulatory requirements, the content of the Code and customer contractual requirements related to social and environmental responsibility.
- . Corrective Action Process - Process for timely correction of deficiencies identified by internal or external assessments, inspections, investigations and reviews.
- . Documentation and Records - Creation of documents and records to ensure regulatory compliance and conformity to company requirements along with appropriate confidentiality to protect privacy.

The Code is modeled on and contains language from the Recognized standards such as International Labour Organization Standards (ILO), Universal Declaration of Human Rights (UDHR), United Nations Convention against Corruption, and the Ethical Trading Initiative (ETI) were used as references in preparing this Code and may be useful sources of additional information

APPENDIX I NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 9	Bidders seal & Signature
---	-------------	--------------------------

**SPECIAL CONDITIONS OF CONTRACT
(SCC)**

Table of Contents

SPECIAL CONDITIONS OF CONTRACT	3
1.0 PRIORITY OF CONTRACT DOCUMENTS:	3
2.0 SCOPE OF WORK:	3
3.0 CONTRACT PRICES:	5
4.0 QUANTITIES VARIATION UNDER THE AWARDED CONTRACT:	5
5.0 FIRM CONTRACT PRICES:	5
6.0 STATUARY VARIATION IN TAXES:	5
7.0 COMPLETION TIME:.....	5
8.0 BANK GUARANTEE:	6
9.0 LIQUIDATED DAMAGES:	6
10.0 LIABILITY & DAMAGES:	7
11.0 WARRANTEE/DEFECT LIABILITY PERIOD:	7
12.0 LATENT DEFECT LIABILITY PERIOD:	8
13.0 INSURANCE:	8
14.0 DRAWINGS/DOCUMENTS:.....	9
15.0 TERMS OF PAYMENT:.....	9
A) FOR SUPPLY OF EQUIPMENT AND MATERIALS:	9
B) FOR ERECTION, INSTALLATION AND TESTING & COMMISSIONING:	9
16.0 ARBITRATION:	10
17.0 UNFORESEEABLE SUB-SURFACE CONDITIONS:	10
18.0 FORCE MAJEURE:	11
19.0 SUSPENSION OF WORK:.....	13
20.0 FINAL TAKING OVER OF THE PACKAGES:	14
21.0 OPERATION:	14
22.0 CONSTRUCTION WATER AND POWER:	14
ANNEXURE - I.....	15
EXECUTION SCHEDULE	15

SPECIAL CONDITIONS OF CONTRACT

1.0 PRIORITY OF CONTRACT DOCUMENTS:

The several documents forming the Contract are to be taken as mutually explanatory of one another, but in case of ambiguities or discrepancies, the same shall be explained and adjusted by the Purchaser, who shall thereupon issue to the Contractor instructions thereon. In such event, unless otherwise provided in the Contract, the priority of the documents forming the Contract shall be as follows:

1. The Contract Agreement
2. The Letter of Acceptance/ Intent
3. Agreed Minutes of the Contract Negotiation Meetings
4. Agreed Minutes of the contract Technical Meetings
5. Instruction To Bidders (ITB)
6. Special Condition of Contract (SCC)
7. General Condition of Contract (GCC)
8. Erection Conditions of Contract (ECC)
9. Civil Conditions of Contract
10. The Priced Bill of Quantities
11. The Particular Technical Specifications
12. The General Technical Specifications
13. The Submitted Tender, including all Appendices and/or Addenda, the latest taking precedence.

2.0 SCOPE OF WORK:

The scope of work under this contract shall include the turnkey execution on End to End Basis, including but not limited to design, manufacturing, inspection & testing, dispatches, loading, unloading, storage at site, erection & installation, testing of the installation, associated civil work, commissioning, Handing over to the purchaser including comprehensive marine cum storage cum erection Insurance (MSE) on "Single Point Responsibility Basis"

The entire scope of work under the contract shall be executed strictly as per the NIT conditions and the technical specification.

Scope of work shall mainly include:

1. The Scope of work under the package shall include all Supply, Survey, Design, Engineering, Manufacturing, Shop testing, Inspection, packing, dispatch, loading, unloading and storage at site, Marine cum Storage cum Erection Insurance policy, assembly, Erection, Structural and Civil work, complete pre-commissioning checks, testing and commissioning at site, obtaining statutory clearance & certification from Chief Electrical Inspector of Delhi and any other statutory authority for charging the substation and handing over of complete package.
2. The scope shall also include supply at site of all barricading, free-issued materials if any (including installation, transportation, loading & unloading), dewatering, watch and ward

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 15	Bidders seal & Signature
---	----------------------------	--------------------------

and transportation of scrap (generated at Site), balance free-issued material, dismantled material from site to site , site to BYPL store including loading & unloading and no additional charges shall be paid against these activities. Used barricading material will be taken back by contractor soon after job is handed over or as directed by BYPL Engineering Incharge. No additional cost for these items will be paid to the Bidder. Any leakage, pilferage and damage of the material shall be in vendor's scope.

3. Contractor shall submit the detailed PERT chart/L2 Network for the execution of the package awarded for BYPL review and approval with major intermediate milestone as mentioned in Annexure- I. Contractor shall strictly adhere to the implementation schedule as per the project plan submitted and approved.
4. All the materials supplied against this contract shall be as per BYPL approved "Makes" and "Specifications" ONLY.
5. Permission for road cutting from Road owning agencies, Tree cutting and other statutory clearances (including all coordination and liasoning) shall be obtained by Bidder. However, All direct Fee shall be borne by BYPL.
6. Wherever BYPL specifications are not available, relevant IS/IEC to be followed. All Drawings mentioned in the Tender Specification and others required for completion of the work shall be submitted and approval of BYPL Engineer in Charge obtained before commencement of any job. Drawing submission process shall not be deemed complete until all the requirements are complied during the submission of the same.
7. The Contractor shall have own testing equipments like IR Tester, Hi Pot Test Kit and Earth Tester with valid Calibration Certificates for testing the cables.
8. The Contractor shall have own Safety equipment like Neon Tester, Portable Earth, Earthing discharge rod etc. along with valid Calibration Certificates of all the equipment.
9. The Bidder should have all major tools and tackles required for execution of work like Bench Machine, Rollers, Jack for lifting the Cable drum along with valid test certificates etc.
10. Any material not specifically mentioned In BOQ but required for successful Erection, Testing and Commissioning of the package awarded shall be deemed to be in the scope of the bidder.
11. Successful Bidder shall depute Safety officer and Quality officer at site separately for each package and for the entire duration of the project and they shall submit the safety report and quality report to BYPL Site In charge on weekly basis.
12. Any item/work, not specifically mentioned in the NIT condition and technical specification but essentially required for completion of the work shall be the responsibility of the contractor
13. All Statuary Compliances (wherever applicable) required to complete the work as defined above are in the scope of contractor.

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 4 of 15	Bidders seal & Signature
---	--------------	--------------------------

14. R&R clearance shall also be part of contractors scope of work , However all Statutory payment shall be borne by BYPL.
15. Electrical inspection clearance certification from Chief Electrical Inspector of Delhi and any other statutory authority for charging the substation are in scope of Contractors.

3.0 CONTRACT PRICES:

The contract price shall be including all the detailed scope as specified in the contract for the package awarded and shall be inclusive of all taxes and duties (GST) as applicable.

Prices are inclusive of all taxes and duties including labour cess.

However, IT as per applicable rate will be deducted from your bills as Tax Deduction at Source (TDS).

GST is included in the contract price awarded , however GST payment shall be made on submission of GST Registration and self declaration on your letter head stating that contractor have deposited/or will deposit the Tax as per the applicable GST laws. Contractor shall furnish your GST registration number.

4.0 QUANTITIES VARIATION UNDER THE AWARDED CONTRACT:

Contract Unit rate shall applicable for the any addition/reduction in quantities to the extent as Specified below:

For Cable feed: Quantities may vary as per the site requirements

5.0 FIRM CONTRACT PRICES:

The contract price shall remain "Firm" throughout the contract execution. No Price Variation and/or escalation on any account shall be payable to the Contractor for any reason whatsoever.

6.0 STATUARY VARIATION IN TAXES:

The total order value shall remain **FIRM**. However in case of any statutory variation in GST, or Taxes, duties and Levies imposed by Competent Authorities by way of fresh notification(s) shall be borne by BYPL on submission of the documentary evidence.

Any variation in taxes shall be applicable only to the direct/price breakup as mentioned in the contract.

7.0 COMPLETION TIME:

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 15	Bidders seal & Signature
---	----------------------------	--------------------------

Scheme Number	Package Name	Total Months for Handing over of the Package, From Zero Date	Total No. of Day for Handing over of the Package From Zero Date
EE20SH1009	PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2	4 months	120 days

Detailed Execution schedule, including intermediate milestone for the execution of the Package is attached as "**Annexure- I**".

8.0 BANK GUARANTEE:

Bank Guarantee	To be submitted on	Valid Upto (tentative)
Contract Performance Guarantee (10% of total Contract value)	Within 15 days of Issue of Order.	Valid till 90 days beyond the Project Completion period/Handing Over.
Bank Guarantee against Advance (For the advance amount)	Invoice for Advance amount along with advance bank guarantee.	Valid till Completion of supplies/work under the contract.
Equipment Performance Bank Guarantee (10% of total Contract value)	Time of claiming the last payment and Issuance of Final Taking over certificate from Purchaser / Owner,	Valid till Completion of Defect Liability Period plus 3 months.

9.0 LIQUIDATED DAMAGES:

9.1 LD FOR DELAY IN COMPLETION OF WORK:

Time is essence of the Contract.

After issuance of the Letter of Intent, the contractual network / L2 network will be finalized and approved by the BYPL. Contractor shall strictly adhere to the completion schedule and intermediate milestones agreed.

If the Contractor fails to successfully hand over the Packages awarded within the agreed contract completion schedule the contractor shall pay to the Purchaser/ Owner, Liquidated

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 15	Bidders seal & Signature
---	----------------------------	--------------------------

damages for the delayed period at the rate of 0.5% of the total contract price per each week of delay or Pro-rata thereof, by which the Completion is delayed.

Maximum LD for delay is 10% of Contract Value.

It is agreed that liquidated damages are a genuine Pre-estimate of damages and not by way of penalty.

9.2 LD ON INTERMEDIATE MILESTONE:

Liquidated Damages shall be applicable on the delay in achieving Intermediate milestone as agreed in the L2 Network which shall be at the rate of **0.5% of the total contract price per each week of delay of Intermediate milestone or Pro-rata** thereof, by which the Milestones are delayed.

LD on delay in milestone activities shall be redeemable if the delays are covered subsequently and the package is handed over within the agreed schedule .

9.3 OVER ALL LIQUIDATED DAMAGES:

The overall Maximum LD for delay is 10% of Contract Value.

However, the total Liquidated Damages for delay will be limited as hereinafter provided below.

Notwithstanding the above, in the event the Contractor fails to complete the package as per the schedule; and delays the "Handling Over" of the package up to a period for which the liquidated damage for time delay becomes more than ten percent (10%) of the Contract Price, then the Purchaser at his sole discretion, shall be entitled to treat the failure as an act of default by the Contractor and same shall entitle the Purchaser to terminate the Contract.

The liquidated damages for delay will be recovered at the sole discretion of the Purchaser from the Contract Price or from other securities/BG's available with the Purchaser or jointly.

10.0 LIABILITY & DAMAGES:

10.1 Limitation of Liability for Clause 9.1 and 9.2 above: The aggregate amount of Supplier liability to Purchaser for all Late Completion Liquidated Damages and Performances (Considered in aggregate), shall not exceed 10% of Contract Price.

10.2 Aggregate Liability of Supplier: Supplier's / Contractor liability to Purchaser under or in connection with the Supply and Erection Contract shall not exceed 110% of the respective Contract Price.

11.0 WARRANTEE/DEFECT LIABILITY PERIOD:

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 7 of 15	Bidders seal & Signature
---	----------------------------	--------------------------



Warranty /Defect Liability Period shall be of **Twenty Four (24) months** from the date of Final Take over of Packages by Purchaser.

The Contractor shall be liable to rectify all defects in the works done by the Contractor under this Contract, or from any act or omission of the contractors during Warranty / Defect Liability Period.

Contractor shall replace/ Repair all the materials / items supplied under the contract against any defect or failure, which arise due to faulty materials, workmanship or design for the entire defects liability period.

If during the defects liability period any materials / items are found to be defective, these shall be replaced or rectified by the bidder at his own cost within the agreed time schedule from the date of receipt of intimation. The bidder shall depute their service personnel within 48 hours in case of emergency and shall ensure the availability of manpower/spares for the same during warranty period.

12.0 LATENT DEFECT LIABILITY PERIOD:

At the end of warranty period, the Supplier's Liability ceases except for latent defects.

Notwithstanding the completion of the Warranty Period, the Supplier shall be responsible for expeditiously making good by repair or replacement at its option and at its cost and expense any Latent Defect which appears before the expiry of the Latent Defects Liability Period.

The Contractor's Liability for latent defects warranty shall be limited to a period of Five (5) years from end of Warranty Period for all the supply items and the work executed under the contract.

For the purpose of this clause, the latent defects shall be the defects inherently lying within the material or arising out of design deficiency or the design deficiency of the implementation process adopted, which do not manifest themselves during Warranty period.

13.0 INSURANCE:

Contractor shall, at his own cost shall take Comprehensive Marine cum Storage cum Erection insurance policy for the total Project cost.

Contractor shall take, at his own cost, Third party insurance and suitable insurance policy for his own men and material.

The insurance covers to be taken by the Contractor shall be in a joint name of Purchaser and the Contractor. The Contractor shall, however, be authorized to deal directly with Insurance Company or companies during the contract period and shall be responsible in regard to maintenance of all insurance covers.

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 15	Bidders seal & Signature
---	----------------------------	--------------------------

Any loss or damage to the equipment during handling, transportation, storage, erection, putting into satisfactory operation and all activities to be performed till the successful completion of and handling over Performance Guarantee tests of the plant shall be to the account of the Contractor. The Contractor shall be responsible for preference of all claims and make good for the damage or loss by way of repairs and/or replacement of the equipment, damaged or lost.

For all the insurance policies taken, Contractor shall be responsible for settlement of claims with the underwriters without any liability on the purchaser and will arrange replacements / rectification expeditiously without waiting for the settlement of insurance claim, at contractor's own cost and this shall not entitle the Contractor for any extension of Time and Cost Overrun.

Marine Transit risk on supply of material on 110% of captioned value & Erection all risk cover on 100% of Project cost which cover include any loss or damage not limited to AOG perils, earthquake and act of terrorism.

14.0 DRAWINGS/DOCUMENTS:

Drawings will be supplied to the Contractor by Purchaser as per Agreed Master Documents List (MDL), Technical Specifications, BOQ and as mentioned in GCC.

15.0 TERMS OF PAYMENT:

A) FOR SUPPLY OF EQUIPMENT AND MATERIALS:

- A. 70% prorata of supply value item wise shall be payable against R/A bills for supply of equipments and materials within 45 days against receipt & acceptance of material at site and submission of following documents duly certified by BYPL Project-in-charge, complete in all respects:
- a) Signed copy of accepted Purchase Order (for first payment)
 - b) LR / RR / BL as applicable
 - c) Challan as applicable
 - d) Two (02) copies of Supplier's detailed Recipient Invoice showing Commodity description, quantity, unit price, total price and basis of delivery, and being 100% of the value of the consignment claimed.
 - e) Two (02) copies of Supplier's transporter invoice duly receipted by BYPL Stores & Original certificate issued by BYPL confirming receipt of the subject material at Stores/Site and acceptance of the same as per the provisions of the contract.
 - f) Two (02) copies Packing List / Detailed Packing List
 - g) Approved Test certificates / Quality certificates, if applicable
 - h) Certificate of Origin, if applicable
 - i) Material Dispatch Clearance Certificate (MDCC)

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 15	Bidders seal & Signature
---	----------------------------	--------------------------

- j) Insurance Policy / Certificate, if applicable
 - k) Warranty / Guarantee Certificate, if applicable
 - l) Check list for bill submission.
- B. 20% prorata on account of supply value of the actual executed value after installation/erection of material duly certified by BYPL Project-in- charge.
- C. Balance 10% on account of supply value of the actual executed value shall be paid in 30 days after completion of successful acceptance testing, commissioning and handing over of complete systems duly certified by BYPL Engineer-in-Charge specified in the tender and on submission of performance Bank Guarantee of 10% amount, in our format valid up to a defect liability period from the date of handing over of the scheme including submission of Electrical Inspector Clearance Certificate, Compliance of final punch point, No Demand Certificate, Letter of Indemnity by the supplier (The format of No Demand Certificate and Letter of Indemnity are attached as Annexure) and after reconciliation & adjustments of payments, if any towards quantities of materials issued from purchaser's stock and consumed by the contractor for expeditious completion of the job.

B) FOR ERECTION, INSTALLATION AND TESTING & COMMISSIONING:

Payment shall be made to you as under:

- i) 90% pro-rata payment of total installation value of the actual executed value shall be made progressively on submission of your running invoices on Monthly basis duly certified by our Engineer In charge & shall be paid within 30 days on receipt of such bills at our office.
- ii) Balance 10% on account of total installation value of the actual executed value payable shall be paid in 30 days after completion of successful acceptance testing, commissioning and handing over of complete systems duly certified by BYPL Engineer-in-Charge specified in the tender and on submission of performance Bank Guarantee of 10% amount, in our format valid up to a defect liability period from the date of handing over of the scheme including submission of Electrical Inspector Clearance Certificate, Compliance of final punch point, No Demand Certificate, Letter of Indemnity by the supplier (The format of No Demand Certificate and Letter of Indemnity are attached as Annexure) and after reconciliation & adjustments of payments, if any towards quantities of materials issued from purchaser's stock and consumed by the contractor for expeditious completion of the job.

16.0 ARBITRATION:

The venue of arbitration shall be New Delhi.

17.0 UNFORESEEABLE SUB-SURFACE CONDITIONS:

Notwithstanding anything contained elsewhere in the contract, if during the execution stage, the Contractor encounters on the Site any sub-surface conditions that are different from those envisaged from the soil testing / data available at the site, or the Contractor's own testing, which necessitates corrective action / changes in the method(s) of work, all costs related with such changes shall be borne by the

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 15	Bidders seal & Signature
---	-----------------------------	--------------------------

Contractor. These conditions shall no way be compensated either for time, or costs, by the Purchaser.

18.0 FORCE MAJEURE:

Force Majeure Events:

For the purpose of this Agreement, Force Majeure means any act, event or circumstance, or combination of acts, events or circumstances, which materially and adversely affects the affected

Party's performance of its obligations pursuant to the terms of this Agreement, but only if and to the extent that such acts, events or circumstances are not within the affected Party's reasonable control, were not reasonably foreseeable and could not have been prevented or overcome by the affected Party through the exercise of reasonable skill or care.

18.1 Political Force Majeure Events:

Which shall comprise the following acts, events and circumstances:

i) Act of war (whether declared or undeclared), invasion, armed conflict or act of foreign enemy, blockade, embargo, revolution, riot insurrection, civil commotion, act of terrorism or sabotage, in each case occurring inside or directly involving India:

ii) Strikes, lockouts or other difficulties, which are politically motivated (rather than motivated primarily by a desire to improve compensation or working conditions of those involved) or are caused in whole or part by another event of Political Force Majeure or are part of a nation-wide or regional strike, or other generalised labour action occurring within India; (excluding such events which are site specific and attributable to the Supplier);

iii) Radioactive contamination or ionising radiation or chemical contamination originating from a source in India or resulting from another Political Force Majeure Event;

18.2 Non Political Force Majeure events comprising the following acts, events and circumstances:

i) Flood, cyclone, lightning, earthquake, drought, storm or any other extreme effect of the natural elements;

ii) Epidemic, or plague;

iii) Fire or explosion;

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 15	Bidders seal & Signature
---	-----------------------------	--------------------------

- iv) Strikes, lockouts or other labour difficulties not included above (excluding such events which are Site specific and attributable only to the contractor)
- v) Air crash, shipwreck or trainwreck or loss of or damage to any major component of the Facility arising in the course of transit.

18.3 Burden of Proof:

In the event that the Parties are unable in good faith to agree that a Force Majeure Event has occurred, the Parties shall submit the dispute for resolution pursuant to clause , provided that the burden of proof as to whether a Force Majeure Event has occurred shall be upon the Party claiming a Force Majeure Event.

18.4 Excused Performance:

The Party claiming Force Majeure shall give notice to the other Party of any Force Majeure Event as soon as reasonably practical after becoming aware of its existence, but not later than **twenty four (24)hours** after the date on which such Party knew or should reasonably have known of the commencement of the Force Majeure Event. Notwithstanding the above, if the Force Majeure Event results in a breakdown of communications rendering it not reasonably practicable to give notice within the applicable time limit specified herein, then the Party claiming Force Majeure shall give such notice as soon as reasonably practicable after the reinstatement of communications, but not later than forty eight (48) hours after such reinstatement.

- (a) The Party claiming Force Majeure shall give notice to the other Party of:
 - i)The cessation of the relevant Force Majeure Event; and
 - ii) The cessation of the effects of such Force Majeure Event on the enjoyment by such Party of its rights or the performance by it of its obligations under this Agreement;
as soon as practicable after becoming aware thereof.
- (b) The suspension of performance shall be of no greater scope and of no longer duration than is reasonably required by the Force Majeure Event.
- (c) No liability of either Party which arose before the occurrence of the Force Majeure Event causing the suspension of performance shall be excused as a result of the occurrence, including, without limitation, liability for the timely payment of money otherwise due and earned by performance of tasks required under this Agreement by any Party.
- (d) Any Party claiming Force Majeure shall use its reasonable efforts to mitigate and overcome the effects of any act, event or circumstance of Force Majeure as soon as practicable after the occurrence of a Force Majeure Event, including by mutual agreement the expenditure of reasonable sums of money, and to co-operate with the other Party to develop and implement a plan of remedial and reasonable alternative measures to remove the Force Majeure Event, provided, however, that no Party shall be required under this provision, to settle any strike or other labour dispute on terms it reasonably considers to be unfavourable to it. The Party claiming Force Majeure shall furnish weekly written reports to the other Party with respect to its progress in

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 15	Bidders seal & Signature
---	-----------------------------	--------------------------

overcoming the effects of the act, event or circumstance of Force Majeure together with such supporting documentation and information as the other Party reasonably requires regarding the claim of Force Majeure.

(e) When the affected Party is able to resume performance of its obligations under this Agreement that Party shall give the other Party written notice to that effect and shall promptly resume performance hereunder.

18.5 Limitations:

Anything in this Agreement to the contrary notwithstanding:

(a) The affected Party shall not be relieved from obligations under this Agreement to the extent that the gross negligence of the affected Party (or, in the case of Supplier, The

Purchaser's Suppliers or any Subcontractor) contributes to or aggravates the Force Majeure Event ; and

(b) The existence of a Force Majeure Event shall not excuse the affected Party from its obligations to make payment of any monies otherwise due and payable by the affected Party pursuant to this Agreement.

18.6 Consequences of Force Majeure

Neither Party shall be considered in default or in breach of its obligations under this Agreement to the extent that performance of such obligations is prevented by any circumstances of a Force Majeure Event.

19.0 SUSPENSION OF WORK:

Purchaser reserves the right to suspend and reinstate execution of the whole or any part of the Works without invalidating the provisions of the Contract. Orders for suspension or reinstatement of the works will be issued to the Contractor in writing. The time for Completion of the Works will be extended for a period equal to duration of the suspension.

For an aggregate suspension period of less than Six (6) months the Contractor shall not claim any reimbursement. Any necessary and demonstrable costs incurred by the Contractor, as a result of suspension of the Works beyond the above period, will be paid by The Purchaser, provided such costs are substantiated to the satisfaction of The Purchaser. For this purpose, only the direct costs incurred shall be considered and this shall exclude any overheads, incidentals or profit. The Purchaser's decision in this regard will be final and binding. The Purchaser shall not be responsible for any liability if suspension or delay is due to some default on the part of the Contractor or its sub-contractor. Purchasers decision in this regard shall be final and binding.

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 15	Bidders seal & Signature
---	-----------------------------	--------------------------



Purchaser shall not be responsible for any liability if suspension is caused due to some default on the part of the supplier and its sub suppliers.

20.0 FINAL TAKING OVER OF THE PACKAGES:

Upon successful completion of testing and Commissioning of the all the items/work under the package awarded and all the testing conducted to the Purchaser/Owner's satisfaction, the Purchaser shall issue to the Contractor a "Taking over Certificate" as a proof of the final acceptance of the packages only after receipt of such certificate from the Owner to Purchaser.

21.0 OPERATION:

Not Applicable

22.0 CONSTRUCTION WATER AND POWER:

Construction Water and power shall be arranged by Contractor at his own cost.

Special Conditions of Contract - SCC NIT NO: CMC/BY/20-21/RB/SV/48	Page 14 of 15	Bidders seal & Signature
---	-----------------------------	--------------------------

ANNEXURE - I**EXECUTION SCHEDULE**

Contractor shall submit the detailed PERT chart/L2 Network for the execution of the package awarded for BYPL review and approval.

However the major milestone shall be as under:

SL NO	DESCRIPTION OF MATERIAL	TIMELINE
1	Zero Date (Letter of Award)	Zero Date
2	Mobilization of manpower	15 days from Zero Date
3	Submission of Drawings/Documents/calculations for Engineering Approval	15 days from Zero Date
4	Engineering Approval	30 days from Zero Date
6	Procurement/Supplies	75 days from Zero Date
6	Testing & Commissioning of 66kV line	110 days from Zero Date or as per the mutually agreed schedule
8	Handing Over	120 days from Zero Date or as per the mutually agreed schedule

**GENERAL CONDITIONS OF CONTRACT
(GCC-SUPPLY)**

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 1 of 16	Bidders seal & Signature
--	----------------------------	--------------------------

Table of Contents

GENERAL CONDITIONS OF CONTRACT (GCC)-SUPPLY	4
1. PRIORITY AND CONTENT OF CONTRACT DOCUMENTS:	4
2. CONTRACT LANGUAGE:.....	4
3. DEFINITIONS AND INTERPRETATION:.....	5
4. EXAMINATION OF SITE AND LOCAL CONDITIONS:	6
5. LANGUAGE AND MEASUREMENT:	6
6. TIME – THE ESSENCE OF CONTRACT:	7
7. PROGRESS REPORT:	7
8. SCOPE OF WORK:.....	7
9. QUANTITY VARIATION AND EXTRA ITEM/WORK:	8
10. FIRM CONTRACT PRICES:.....	8
11. CONTRACT RATES:.....	8
12. TAXES AND DUTIES:	8
13. STATUTORY VARIATION:.....	8
14. CHANGE OF LAW:.....	9
15. SPECIFICATIONS AND STANDARDS:	9
16. QUALITY ASSURANCE AND INSPECTION:.....	9
17. ERRORS AND OMISSIONS:	10
18. PACKING, PACKING LIST & MARKING:	10
19. PRICE BASIS FOR SUPPLY OF MATERIALS:	10
20. TERMS OF PAYMENT AND BILLING – SUPPLY:	11
21. COMMISSIONING SPARES AND TOOLS & TACKLES:.....	11
22. RETURN, REPLACEMENT OR SUBSTITUTION:.....	11
23. PERFORMANCE GUARANTEE:.....	11
24. WARRANTY/DEFECTS LIABILITY PERIOD:.....	11
25. SUPPORT BEYOND THE GUARANTEE PERIOD:.....	11
26. DOCUMENTATION:.....	12
27. FORFEITURE:	12
28. SUSPENSION OR EXTENSION:	12
29. TERMINATION DUE TO CONTRACTORS DEFAULT:.....	12
30. EVENTS OF DEFAULT:.....	13
31. CONSEQUENCES OF DEFAULT:	13
32. RISK & COST:.....	14
33. ARBITRATION:.....	14

34 **TERMINATION FOR CONVENIENCE OF BYPL:**..... 14
35 **LIQUIDATED DAMAGES:** 14
36 **TRANSFER AND SUB-LETTING:** 14
37 **RECOVERIES:** 14
38 **WAIVER:** 15
39 **INDEMNIFICATION:**..... 15
40 **PATENT RIGHTS AND ROYALTY:**..... 15
41 **CONFIDENTIALITY:** 15
42 **DISPUTE RESOLUTION & ARBITRATION:** 16

GENERAL CONDITIONS OF CONTRACT (GCC)-SUPPLY

The General Condition of Contract shall form a part of specifications, contract document.

1. PRIORITY AND CONTENT OF CONTRACT DOCUMENTS:

The several documents forming the Contract are to be taken as mutually explanatory of one another, but in case of ambiguities or discrepancies, the same shall be explained and adjusted by the Purchaser, who shall thereupon issue to the Contractor, instructions thereon. In such event, unless otherwise provided in the Contract, the priority of the documents forming the Contract shall be as follows:

1. The Contract Agreement
2. The Letter of Acceptance/ Intent
3. Agreed Minutes of the Contract Negotiation Meetings.
4. Agreed Minutes of the contract Technical Meetings.
5. Instruction To Bidders (ITB)
6. Special Condition of Contract (SCC)
7. General Condition of Contract (GCC)
8. Erection Conditions of Contract (ECC)
9. Civil Conditions of Contract
10. The Priced Bill of Quantities
11. The Particular Technical Specifications
12. The General Technical Specifications
13. The Submitted Tender, including all Appendices and/or Addenda, the latest taking precedence.

All the materials, literature, data and information of any sort given by the contractor along with its bid proposal subject to the approval of the purchaser.

2. CONTRACT LANGUAGE:

All documents, instructions, catalogues, brochures, pamphlets, design data, norms and calculations, drawings, operation, maintenance and safety manuals, reports, labels, on deliveries and any other data shall be in English Language only.

The Contract documents and all correspondence between the BYPL, Third Parties associated with the contract, and the Bidder shall be in English language.

However, all signboards required indicating "Danger" and/or security at site and otherwise statutory required shall be in English, Hindi.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 4 of 16	Bidders seal & Signature
--	--------------	--------------------------

3. DEFINITIONS AND INTERPRETATION:

Definitions TO BE FOLLOWED UNDER THE CONTRACT shall have following meanings:

3.1 COMPANY / PURCHASER / OWNER: Means BSES Yamuna Power Ltd, a company incorporated under the Companies Act 1956 and having its office at Shaktikiran Building, Karkardooma, Delhi - 110032, which expression shall include its authorized representatives, agents, successors and assigns.

3.2 CONTRACTOR: Shall mean the successful Tenderer / vendor to whom the contract has been awarded.

3.3 Rate: The unit rates for the work to be carried out at site shall be as per finalized unit rates through tender. The finalized rates shall be firm for the entire duration of work to be carried out by the Contractor under the work order and are not subject to escalation for any reason whatsoever.

3.4. CONTRACT SPECIFICATION: The terms "CONTRACT Specification" shall mean the Technical specification of the work as agreed by you and description of work as detailed in Annexure-I enclosed herewith and all such particulars mentioned directly/referred to or implied as such in the contract.

3.5. SITE: The terms "Site" shall mean the working location in BYPL area. Under this tender, working location shall be as mentioned elsewhere.

3.6. ENGINEER IN CHARGE: "Engineer In-charge" means the Company's authorized representative for the purpose of carrying out the work.

3.7 APPLICABLE LAW: Applicable Laws means the constitution of India and any act, rule, regulations, directive, notification, code, order or instruction having its force of law enacted or issued by any competent legislature or Governmental Agency (including those related to taxes, duties, assessments, expropriation and compulsory acquisition) as may be in effect from time to time the implications thereof shall be deemed a Change in Law or Change in Permits.

3.8 OTHER CLEARANCES: Means any consent, approval, permit or other authorisation which is required to be granted by authorities (local, government or any other) essential to start/complete the work.

3.9 DEFECT LIABILITY PERIOD: Shall mean the period during which the contractor shall remain liable for repair or replacement of any defective part of the work performed under the contract, free of cost.

3.10 TENDER SPECIFICATION: The terms "Tender Specification" shall mean the Indian Standard specification of the work and description of work as detailed in Tender document/Tender enclosed and all such particulars mentioned directly/referred to or implied as such in the Tender.

3.11. CONTRACT PRICE shall mean the price referred to in the "Letter of Intent/Purchase Order".

3.12 CONTRACT PERIOD shall mean the period during which the "Contract" shall be executed as agreed between the Supplier and the Purchaser in the Contract inclusive of extended contract period for reason beyond the control of the Supplier and/or Purchaser due to force majeure.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 16	Bidders seal & Signature
--	----------------------------	--------------------------

3.13 CODES AND SPECIFICATION shall mean all the applicable codes and standards as indicated in the Specification.

3.14 CHANGE OF WORK means any addition to, deletion from, suspension of or other modification, to the Work, or to the quality, function or as delineated in this Contract, including any such addition, deletion, suspension or other modification, which requires a change in one or more of the Technical Specifications and the completion schedule

3.15 EPC means Engineering, Procurement and Construction wherein the EPC contractor is made responsible for all the activities from design, procurement, supply, storage construction, commissioning and handover of the project to owner.

3.16 EFFECTIVE DATE OF CONTRACT means the date of issue/award of contract shall be the Effective Date of Contract or Contract Commencement date.

3.17 CONTRACT COMMENCEMENT DATE means the date of issue/award of contract shall be the Effective Date of Contract or Contract Commencement date.

3.18 CONTRACT COMPLETION DATE means the date of expiry of Guarantee/defect liability Period shall be deemed as the Contract Completion Date.

4. EXAMINATION OF SITE AND LOCAL CONDITIONS:

The contractor is deemed to have visited the site of the work and ascertained therefore all site conditions and information pertaining to his work.

Before submitting the bid, all bidders will at their expenses make or obtain any additional information, investigations, explorations, test and studies and obtain any additional information and data which pertains to the physical conditions at or contiguous to the site or otherwise which may affect cost, progress, performance of the work and which the bidder deems necessary to determine its Bid for performing the work in accordance with the time and other terms and conditions of the tender/contract documents.

The company shall not accept any claim whatsoever arising out of the difficult site/terrain/local conditions, if an

5. LANGUAGE AND MEASUREMENT:

The CONTRACT issued to the contractor by the company and all correspondence and documents relating to the CONTRACT placed on the Contractor shall be written in English language.

Metric System shall be followed for all dimension, units etc.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 16	Bidders seal & Signature
--	--------------	--------------------------

6. TIME – THE ESSENCE OF CONTRACT:

The time and the date of Contract Execution completion of the "Package" as stipulated in the Letter of Intent/ Purchase order issued to the Supplier shall be deemed to be the essence of the "Contract". The "Entire Package" has to be completed and handed over not later than the aforesaid Schedule.

7. PROGRESS REPORT:

The supplier shall submit weekly/fortnightly/monthly progress report as desired by the Purchaser's Engineer in Charge and in the format mutually agreed between the parties.

8. SCOPE OF WORK:

The scope of work under this contract shall include the turnkey execution on End to End Basis , including but not limited to design, manufacturing, inspection & testing, dispatches, loading , unloading ,storage at site, erection & installation, testing of the installation, associated civil work ,commissioning ,handing over to the purchaser including comprehensive marine cum storage cum erection Insurance (MSE) on "Single Point Responsibility Basis" on turnkey Basis for the following packages:

Scheme Number	Package Name	Total Months for Handing over of the Package, From Zero Date	Total No. of Day for Handing over of the Package From Zero Date
EE20SH1009	PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2	4 months	120 days

Brief Scope of Work related to all the supplies for the successful completion, testing & commissioning and final handover for the above packages shall be as per the NIT conditions with the following salient details.

Any item/work, not specifically mentioned in the NIT condition and technical specification but essentially required for completion of the work shall be the responsibility of the contractor. The "Scope of Supply" shall be on the basis of Bidder's responsibility, completely covering the obligations, responsibility and supplies provided in this Bid enquiry whether implicit or explicit.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 7 of 16	Bidders seal & Signature
--	----------------------------	--------------------------

9. QUANTITY VARIATION AND EXTRA ITEM/WORK:

The purchaser reserves the rights to vary the quantity as below:

- a) For Cable feed: Quantity may vary as per the site requirements.

The Bill of Quantity break-up shown else-where in Price Schedule is tentative. The bidder shall ascertain himself regarding material required for completeness of the entire work. Any item not indicated but is required to complete the job, shall be deemed to be included in the prices quoted.

Payment will be made on the basis of actual quantity of supplies/actual measurement of works accepted by BYPL and not on the basis of contract quantity.

10. FIRM CONTRACT PRICES:

The rates finalized for this order shall be firm for the entire duration of work carried out by the Contractor under the order and are not subject to any variation and escalation for any reason whatsoever.

11 CONTRACT RATES:

The rates finalized for this order shall be firm for the entire duration of work carried out by the Contractor under the order and are not subject to any variation and escalation for any reason whatsoever.

The cost of insurance during loading/unloading of materials/ equipments during its storage and handling/erection at site for installation is included in the contractor's scope and value is included in the unit rates finalized.

The unit rates finalized are also inclusive of Insurance policy taken as defined in Special Conditions Contracts (SCC) Though Bidders shall indicate the value separately.

12 TAXES AND DUTIES:

Prices are inclusive of all taxes and duties including labour cess.

GST is included in the contract price awarded , however GST payment shall be made on submission of GST Registration and self declaration on your letter head stating that contractor have deposited/or will deposit the Tax as per the applicable GST laws. Contractor shall furnish your GST registration number.

13 STATUTORY VARIATION:

Any statutory variations i.e. increase/decrease in Taxes / Duties introduces by central Govt. / State Govt. of shall be reimbursed/recovered to/from Contractor against documentary evidence and proof.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 16	Bidders seal & Signature
--	----------------------------	--------------------------



Any variation in taxes shall be applicable only to the direct/price breakup as mentioned in the contract.

14 CHANGE OF LAW:

"Change in Law" means:

- a) any enactment or issue of any new Applicable Law,
- b) any amendment, alteration, modification, or repeal of any existing Applicable Law or any new or modified directive or order there under,
- c) any change or variation in taxes payable in connection with and under this Agreement in each case with respect to a), b), and c) above coming into effect after the date of this Agreement.

15 SPECIFICATIONS AND STANDARDS:

The Bidder shall follow all codes and standards referred in the Contract Document. Codes and standards not specifically mentioned in the Contract Document may be followed by the Bidder with the prior written approval of BYPL, provided materials, supplies and equipment according to the standard are equal to or better than the corresponding standards specified in the Contract.

Product manufactures /makes names mentioned in the Contract documents are for the purpose of establishing the type and quality of products to be used. The Bidder shall not change the brand name and qualities of the bought out items without the prior written approval of the BYPL. All such products and equipment shall be used or installed in strict accordance with original manufacturer's recommendations, unless otherwise directed by the BYPL. In any circumstances the codes, specimen and standards prescribed by any government agency should not be violated.

16 QUALITY ASSURANCE AND INSPECTION:

Immediately on award of contract, the bidder shall prepare detailed quality assurance plan/test procedure identifying the various stages of manufacture, quality checks performed at each stage, raw material inspection and the Customer hold points. The document shall also furnish details of method of checking, inspection and acceptance standards / values and get the approval of Purchaser before proceeding with manufacturing. However, Purchaser shall have right to review the inspection reports, quality checks and results of suppliers' in house inspection department which are not Customer hold points and the supplier shall comply with the remarks made by purchaser or his representative on such reviews with regards to further testing, rectification or rejection, etc. In case of standard items, BYPL shall forward the standard QAP which is to be followed by vendor during manufacturing.

Witness and Hold points are critical steps in manufacturing, inspection and testing where the supplier is obliged to notify the Purchaser in advance so that it may be witnessed by the Purchaser. Final inspection is a mandatory hold point. The supplier to proceed with the work past a hold point only after clearance by purchaser or a witness waiver letter from BYPL.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 16	Bidders seal & Signature
--	----------------------------	--------------------------

The performance of waiver of QA activity by Purchaser at any stage of manufacturing does not relieve the supplier of any obligation to perform in accordance with and meet all the requirements of the procurement documents and also all the codes & reference documents mentioned in the procurement document nor shall it preclude subsequent rejection by the purchaser.

On completion of manufacturing, the items can only be dispatched after receipt of dispatch instructions issued by the Purchaser.

All in-house testing and inspection shall be done without any extra cost. The in-house inspection shall be carried out in presence of BYPL/BYPL authorized third party inspection agency. Cost of Futile/abortive visit(s) shall be debited from the invoices.

Purchaser reserves the right to send any material being supplied to any recognized laboratory for testing, wherever necessary and the cost of testing shall be borne by the Bidder. In case the material is found not in order with the technical requirement / specification, the charges along with any other penalty which may be levied is to be borne by the bidder.

17 ERRORS AND OMISSIONS:

The Supplier shall be responsible for all discrepancies, errors and omissions in the drawings, documents or other information submitted by him, irrespective of whether these have been approved, reviewed or otherwise accepted by the BYPL or not. However any error in design/drawing arising out of any incorrect data/written information from BYPL will not be considered as error and omissions on part of the Supplier.

18 PACKING, PACKING LIST & MARKING:

Packing: Supplier shall pack or shall cause to be packed all Commodities in crates/boxes/drums/containers/cartons and otherwise in such a manner as shall be reasonably suitable for shipment by road or rail to BYPL, Delhi/New Delhi stores/site without undue risk of damage in transit.

Packing List: The contents of each package shall be itemized on a detailed list showing the exact weight, extreme outside dimensions (length, width & weight) of each container/box/drum/carton, Item SAP Code, PO No & date. One copy of the packing list shall be enclosed in each package delivered.

19 PRICE BASIS FOR SUPPLY OF MATERIALS:

Bidders shall quote their prices on Landed Cost Basis and separate price for each item.

Bidders shall quote FIRM prices for supply to BYPL Delhi/New Delhi stores inclusive of all packing, forwarding, loading at manufacturer's premises, unloading at site/stores and payment of GST. Storage of material is under the bidder Scope. Bidder shall arrange transit Insurance as per clause nos. 8 mentioned in Volume -1 Special Condition of Contract (SCC).

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

20 TERMS OF PAYMENT AND BILLING – SUPPLY:

Terms of payment and Billing shall be as specified in Volume –I, Special Condition of Contract.

21 COMMISSIONING SPARES AND TOOLS & TACKLES:

Commissioning Spares shall be deemed to be included in the quoted price.

22 RETURN, REPLACEMENT OR SUBSTITUTION:

BYPL shall give Supplier notice of any defective Commodity promptly after becoming aware thereof. BYPL may in its discretion elect to return defective Commodities to Supplier for replacement, free of charge to BYPL, or may reject such Commodities and purchase the same or similar Commodities from any third party. In the latter case BYPL shall furnish proof to Supplier of the cost of such substitute purchase. In either case, all costs of any replacement, substitution, shipping, labour and other related expenses incurred in connection with the return and replacement or for the substitute purchase of a Commodity hereunder should be for the account of Supplier. BYPL may set off such costs against any amounts payable by BYPL to Supplier. Supplier shall reimburse BYPL for the amount, if any, by which the price of a substitute Commodity exceeds the price for such Commodity as quoted in the Bid.

23 PERFORMANCE GUARANTEE:

Performance Guarantee shall be as specified in Volume –I, Special Condition of Contract.

24 WARRANTY/DEFECTS LIABILITY PERIOD:

All supplies made/Work executed shall be guaranteed against any defect or failure which may arise due to faulty materials, design or workmanship for a period of 24 months from the date of final handing over of the entire package as defined in SCC.

If during the Defect Liability Period any work are found to be defective, shall be immediately rectified or repaired, upto BYPL satisfaction, by the contractor at his own cost within 10 days from the date of receipt of intimation from BYPL.

Under no circumstances any extra claim in terms of time and cost shall be entertained for such repair/rectification.

25 SUPPORT BEYOND THE GUARANTEE PERIOD:

The Bidder shall ensure availability of spares and necessary support for a period of at least Twenty (20) years post completion of guarantee period of equipments supplied against the contract.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

26 DOCUMENTATION:

The Bidder's shall procure all equipment from BYPL approved sources as per attached specifications. The Bidder shall submit 5 copies of Material/Type Test Certificates, O&M Manuals, and Approved & As-built drawings. The Bidder shall ensure for the strict compliance to the specifications and Field Quality Procedures issued by BYPL Engineer in-charge.

27 FORFEITURE:

Each Performance Bond established under the contract shall contain a statement that it shall be automatically and unconditionally forfeited without recourse and payable against the presentation by BYPL of this Performance Bond, to the relevant bank referred to above, together with a simple statement that supplier has failed to comply with any term or condition set forth in the Contract. Each Performance BG established under will be automatically and unconditionally forfeited without recourse if BYPL in its sole discretion determines that supplier has failed to comply with any term or condition set forth in the contract.

28 SUSPENSION OR EXTENSION:

Purchaser reserves the right to suspend and reinstate execution of the whole or any part of the Works without invalidating the provisions of the Contract. Orders for suspension or reinstatement of the works will be issued to the Contractor in writing. The time for Completion of the Works will be extended for a period equal to duration of the suspension.

For an aggregate suspension period of less than Six (6) months the Contractor shall not claim any reimbursement. Any necessary and demonstrable costs incurred by the Contractor, as a result of suspension of the Works beyond the above period, will be paid by The Purchaser, provided such costs are substantiated to the satisfaction of The Purchaser. For this purpose, only the direct costs incurred shall be considered and this shall exclude any overheads, incidentals or profit. The Purchaser's decision in this regard will be final and binding. The Purchaser shall not be responsible for any liability if suspension or delay is due to some default on the part of the Contractor or its sub-contractor. Purchasers decision in this regard shall be final and binding. Purchaser shall not be responsible for any liability if suspension is caused due to some default on the part of the supplier and its sub suppliers.

29 TERMINATION DUE TO CONTRACTORS DEFAULT:

The Purchaser may terminate the contract after giving 7(seven) days notice if any of following occurs

- a) Contractor fails to complete execution of works within the approved schedule of works, terms and conditions
- b) In case the contractor commits any Act of Insolvency, or adjudged insolvent
- c) Has abandoned the contract
- d) Has failed to commence work or has suspended the progress of works
- e) Has failed to proceed the works with due diligence and failed to make such due progress

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

30 EVENTS OF DEFAULT:

BYPL may, without prejudice to any of its other rights or remedies under the Work Order or in law, terminate the whole or any part of this Work Order by giving written notice to the Contractor, if in the opinion of BYPL, contractor has neglected to proceed with the works with due diligence or commits a breach of any of the provisions of this work order including but not limited to any of the following cases:

- a) Failing to complete execution of work within the terms specified in this work order.
- b) Failing to complete works in accordance with the approved schedule of works.
- c) Failing to meet requirements of specifications, drawings, and designs as approved by BYPL.
- d) Failing to comply with any reasonable instructions or orders issued by BYPL in connection with the works.
- e) Failing to comply with any of the terms or conditions of this work order.
- (f) Supplier fails or refuses to deliver supplies conforming to this NIT / specifications, or fails to deliver supplies within the period specified in PO or any extension thereof
- (g) Supplier becomes insolvent or unable to pay its debts when due, or commits any act of bankruptcy, such as filing any petition in any bankruptcy, winding-up or reorganization proceeding, or acknowledges in writing its insolvency or inability to pay its debts; or the Supplier's creditors file any petition relating to bankruptcy of Supplier;
- (i) Supplier otherwise fails or refuses to perform or observe any term or condition of the Contract and such failure is not remediable or, if remediable, continues for a period of 30 days after receipt by the Supplier , of notice of such failure from BYPL.

In the event BYPL terminates this work order, in whole or in part, on the occurrence of any event of default, BYPL reserves the right to engage any other subcontractor or agency to complete the work or any part thereof, and in addition to any other right BYPL may have under this work order or in law including without limitation the right to penalize for delay under clause 15.0 of this work order, the contractor shall be liable to BYPL for any additional costs that may be incurred by COMPANY for the execution of the Work.

31 CONSEQUENCES OF DEFAULT:

- (a) If an Event of Default shall occur and be continuing, BYPL may forthwith terminate the Contract by written notice.
- (b) In the event of an Event of Default, BYPL may, without prejudice to any other right granted to it by law, or the Contract, take any or all of the following actions;
- (c) present for encashment to the bank the relevant Performance Bond;
- (d) Purchase the same or similar Commodities from any third party; and/or

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

- (e) Recover any losses and/or additional expenses BYPL may incur as a result of Supplier's default

32. RISK & COST:

If the Contractor fails to execute the work as per NIT specification / as agreed in the contract within the scheduled period and even after the extended period, the contract shall get terminated and BYPL reserves the right to get the work executed from any other source at the Risk & Cost of the Contractor.

The Extra Expenditure so incurred shall be debited to the Contract.

33 ARBITRATION:

To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this LOA. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for settlement by arbitration. The arbitration to be undertaken by two arbitrators, one each to be appointed by either party. The arbitrators appointed by both the parties shall mutually nominate a person to act as presiding arbitrator before entering upon the reference in the event of a difference between the two arbitrators and the award of the said presiding arbitrator in such a contingency shall be conducted in accordance with this provisions of the Indian Arbitration & Conciliation Act, 1996 and the venue of such arbitration shall be in the city of New Delhi only.

34 TERMINATION FOR CONVENIENCE OF BYPL:

BYPL at its sole discretion may terminate the contract by giving 30 days prior notice in writing or through email to the Supplier. BYPL shall pay the Supplier for all the supplies/ services rendered till the actual date of contract termination against submission of invoice by the Supplier to that effect.

35 LIQUIDATED DAMAGES:

Liquidated damages shall be as per Volume –I, Special Condition of Contract.

36 TRANSFER AND SUB-LETTING:

The Supplier shall not sublet, transfer, assign or otherwise part with the Contract or any part thereof, either directly or indirectly, without prior written permission of the Purchaser

37 RECOVERIES:

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 14 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

Whenever under this contract any money is recoverable from and payable by the bidder, the purchaser shall be entitled to recover such sum by appropriating in part or in whole by deducting any sum due to which any time thereafter may become due from the supplier in this or any other contract. Should the sum be not sufficient to cover the full amount recoverable the bidder shall pay to the purchaser on demand the remaining balance.

38 WAIVER:

Failure to enforce any condition herein contained shall not operate as a waiver of the condition itself or any subsequent breach thereof.

39 INDEMNIFICATION:

Notwithstanding contrary to anything contained in this NIT, Supplier shall at his costs and risks make good any loss or damage to the property of the Purchaser and/or the other Supplier engaged by the Purchaser and/or the employees of the Purchaser and/or employees of the other Supplier engaged by the Purchaser whatsoever arising out of the negligence of the Supplier while performing the obligations under this contract.

40 PATENT RIGHTS AND ROYALTY:

If, in the course of performance of its functions and duties as envisaged by the scope of the present GCC, the Bidder acquires or develops, any unique knowledge or information which would be covered, or, is likely to be covered within the definition of a trademark, copyright, patent, business secret, geographical indication or any other form of intellectual property right, it shall be obliged, under the terms of this present GCC, to share such knowledge or information with BYPL. All rights, with respect to, or arising from such intellectual property, as afore mentioned, shall solely vest in BYPL.

Moreover, the Bidder undertakes not to breach any intellectual property right vesting in a third party/parties, whether by breach of statutory provision, passing off, or otherwise. In the event of any such breach, the Bidder shall be wholly liable to compensate, indemnify or make good any loss suffered by such third party/parties, or any compensation/damages arising from any legal proceeding/s, or otherwise. No liability of BYPL shall arise in this respect, and any costs, damages, expenses, compensation payable by BYPL in this regard to a third party/parties, arising from a legal proceeding/s or otherwise, shall be recoverable from the Bidder.

41 CONFIDENTIALITY:

Bidder and its employees or representatives thereof shall strictly maintain the confidentiality of various information they come across while executing the contract as detailed below.

Documents

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 15 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

All maps, plans, drawings, specifications, schemes and other documents or information related to the Contract/Project and the subject matter contained therein and all other information given to the Bidder by BYPL in connection with the performance of the contract shall be held confidential by the Bidder and shall remain the property of the BYPL and shall not be used or disclosed to third parties by the Bidder for any purpose other than for which they have been supplied or prepared. The Bidder may disclose to third parties, upon execution of confidentiality agreements, such part of the drawings, specifications or information if such disclosure is necessary for the performance of the Work provided such third parties agree in writing to keep such information confidential to the same extent and degree as provided herein, for the benefit of the BYPL.

Geographical Data

Maps, layouts and photographs of the site including its surrounding regions showing vital installation for national security of country or those of BYPL shall not be published or disclosed to the third parties or taken out of the country without prior written approval of the BYPL and upon execution of confidentiality agreements satisfactory to the BYPL with such third parties prior to disclosure.

Violation

In case of violation of this clause, the Bidder is liable to pay compensation and damages as may be determined by the competent authority of BYPL.

42 DISPUTE RESOLUTION & ARBITRATION:

To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this contract. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for settlement by arbitration. The arbitration to be undertaken by two arbitrators, one each to be appointed by either party. The arbitrators appointed by both the parties shall mutually nominate a person to act as presiding arbitrator before entering upon the reference in the event of a difference between the two arbitrators and the award of the said presiding arbitrator in such a contingency shall be conducted in accordance with the provisions of the Indian Arbitration & Conciliation Act, 1996 and the venue of such arbitration shall be in the city of New Delhi only. The language of proceedings, documents and communication shall be English.

Suspension of Work on Account of Arbitration

The reference to negotiation/arbitration shall proceed notwithstanding that the Works shall not then be or be alleged to be complete, provided always that the obligations of the Purchaser and the Supplier shall not be altered by reasons of arbitration being conducted during the progress of the Works. In no event shall the Supplier be entitled to suspend the Execution of the Works or part of the Works to which the Dispute relates on account of arbitration and payments to the Supplier shall continue to be made in terms of the Contract.

The laws and jurisdiction of contract

Where recourse to a Court is to be made in respect of any matter, the courts at Delhi shall have exclusive jurisdiction.

General Conditions of Contract –GCC SUPPLY NIT NO: CMC/BY/20-21/RB/SV/48	Page 16 of 16	Bidders seal & Signature
--	-----------------------------	--------------------------

ERECTION CONDITIONS OF CONTRACT (ECC)

Table of Contents

GENERAL TERMS & CONDITIONS - ERECTION, TESTING & COMMISSIONING 3

1. PRIORITY OF CONTRACT DOCUMENTS: 3

2. DEFINITIONS AND INTERPRETATION: 3

3. EXAMINATION OF SITE AND LOCAL CONDITIONS: 5

4. LANGUAGE AND MEASUREMENT: 5

5. SCOPE OF WORK: 6

6. CONTRACT RATES: 8

7. TAXES AND DUTIES: 8

8. ACCOMODATION & CONVEYENCE FOR THE STAFF: 9

9. STORAGE AT SITE: 9

13. COMPLETION PERIOD: 10

14. CLEANLINESS & PRECAUTIONS AT SITE TO PREVENT DUST POLLUTION: 11

17. PENALTY AND LIQUIDATED DAMAGES 13

18. SAFETY CODE: 13

19. STATUTORY OBLIGATIONS: 13

20. WORKMAN COMPENSATION: 14

21. STAFF AND WORKMAN: 15

22. HUMAN RESOURCE ISSUES: 16

23. INSURANCE: 18

24. SECURITY 18

25. ENVIRONMENTAL, HEALTH & SAFETY PLAN: 19

26. TEST CERTIFICATE & QUALITY ASSURANCE: 19

27. SUB-CONTRACTING / SUBLETTING: 20

28. INDEMNITY: 20

29. EVENTS OF DEFAULTS: 20

30. RISK & COST: 21

31. ARBITRATION: 21

32. SECRECY CLAUSE: 21

33. TERMINATION DUE TO NON PERFORMANCE: 22

34. TERMINATION BY EEMPLOYER CONVENIENCE: 22

35. QUALITY: 23

36. CONSTRUCTION WATER & POWER: 23

37. PROGRESS REPORTS OF WORK EXECUTION: 23

Annexure - I 26

GENERAL TERMS & CONDITIONS - ERECTION, TESTING & COMMISSIONING

The Erection Condition of the contract shall form a part of the specifications, contract documents.

1. PRIORITY OF CONTRACT DOCUMENTS:

The several documents forming the Contract are to be taken as mutually explanatory of one another, but in case of ambiguities or discrepancies, the same shall be explained and adjusted by the Purchaser, who shall thereupon issue to the Contractor, instructions thereon. In such event, unless otherwise provided in the Contract, the priority of the documents forming the Contract shall be as follows:

1. The Contract Agreement
2. The Letter of Acceptance/ Intent
3. Agreed Minutes of the Contract Negotiation Meetings.
4. Agreed Minutes of the contract Technical Meetings.
5. Instruction to Bidders (ITB)
6. Special Condition of Contract (SCC)
7. General Condition of Contract (GCC)
8. Erection Conditions of Contract (ECC)
9. Civil Conditions of Contract
10. The Priced Bill of Quantities
11. The Particular Technical Specifications
12. The General Technical Specifications
13. The Submitted Tender, including all Appendices and/or Addenda, the latest taking precedence.

All the materials, literature, data and information of any sort given by the contractor along with its bid proposal subject to the approval of the purchaser.

2. DEFINITIONS AND INTERPRETATION:

Definitions TO BE FOLLOWED UNDER THE CONTRACT shall have following meanings:

2.1 COMPANY / PURCHASER / OWNER: Means BSES YAMUNA Power Ltd, a company incorporated under the Companies Act 1956 and having its office at Shaktikiran Building, Karkardooma, Delhi -110032, which expression shall include its authorized representatives, agents, successors and assigns.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 26	Bidders seal & Signature
--	----------------------------	--------------------------

2.2 CONTRACTOR: Shall mean the successful Tenderer / vendor to whom the contract has been awarded.

2.3 Rate: The unit rates for the work to be carried out at site shall be as per finalized unit rates through tender. The finalized rates shall be firm for the entire duration of work to be carried out by the Contractor under the work order and are not subject to escalation for any reason whatsoever.

2.4. CONTRACT SPECIFICATION: The terms "CONTRACT Specification" shall mean the Technical specification of the work as agreed by you and description of work as detailed in Annexure-I enclosed herewith and all such particulars mentioned directly/referred to or implied as such in the contract.

2.5. SITE: The terms "Site" shall mean the working location in BYPL area. Under this tender, working location shall be as mentioned elsewhere

2.6. ENGINEER IN CHARGE: "Engineer In-charge" means the Company's authorized representative for the purpose of carrying out the work.

2.7 APPLICABLE LAW: Applicable Laws means the constitution of India and any act, rule, regulations, directive, notification, code, order or instruction having its force of law enacted or issued by any competent legislature or Governmental Agency (including those related to taxes, duties, assessments, expropriation and compulsory acquisition) as may be in effect from time to time the implications thereof shall be deemed a Change in Law or Change in Permits.

2.8 OTHER CLEARANCES: Means any consent, approval, permit or other authorisation which is required to be granted by authorities (local, government or any other) essential to start/complete the work.

2.9 DEFECT LIABILITY PERIOD: Shall mean the period during which the contractor shall remain liable for repair or replacement of any defective part of the work performed under the contract, free of cost.

2.10 TENDER SPECIFICATION: The terms "Tender Specification" shall mean the Indian Standard specification of the work and description of work as detailed in Tender document/Tender enclosed and all such particulars mentioned directly/referred to or implied as such in the Tender.

2.11. CONTRACT PRICE shall mean the price referred to in the "Letter of Intent/Purchase Order".

2.12 CONTRACT PERIOD shall mean the period during which the "Contract" shall be executed as agreed between the Supplier and the Purchaser in the Contract inclusive of extended contract period for reason beyond the control of the Supplier and/or Purchaser due to force majeure.

2.13 CODES AND SPECIFICATION shall mean all the applicable codes and standards as indicated in the Specification.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 4 of 26	Bidders seal & Signature
--	--------------	--------------------------

2.14 CHANGE OF WORK means any addition to, deletion from, suspension of or other modification, to the Work, or to the quality, function or as delineated in this Contract, including any such addition, deletion, suspension or other modification, which requires a change in one or more of the Technical Specifications and the completion schedule

2.15 EPC means Engineering, Procurement and Construction wherein the EPC contractor is made responsible for all the activities from design, procurement, supply, storage construction, commissioning and handover of the project to owner.

2.16 EFFECTIVE DATE OF CONTRACT means the date of issue/award of contract shall be the Effective Date of Contract or Contract Commencement date.

2.17 CONTRACT COMMENCEMENT DATE means the date of issue/award of contract shall be the Effective Date of Contract or Contract Commencement date.

2.18 CONTRACT COMPLETION DATE means the date of expiry of Guarantee/defect liability Period shall be deemed as the Contract Completion Date.

3 EXAMINATION OF SITE AND LOCAL CONDITIONS:

The contractor is deemed to have visited the site of the work and ascertained therefore all site conditions and information pertaining to his work.

Before submitting the bid, all bidders will at their expenses make or obtain any additional information, investigations, explorations, test and studies and obtain any additional information and data which pertains to the physical conditions at or contiguous to the site or otherwise which may affect cost, progress, performance of the work and which the bidder deems necessary to determine its Bid for performing the work in accordance with the time and other terms and conditions of the tender/contract documents.

The company shall not accept any claim whatsoever arising out of the difficult site/terrain/local conditions, if an

4 LANGUAGE AND MEASUREMENT:

The CONTRACT issued to the contractor by the company and all correspondence and documents relating to the CONTRACT placed on the Contractor shall be written in English language.

Metric System shall be followed for all dimension, units etc.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 26	Bidders seal & Signature
--	--------------	--------------------------

5 SCOPE OF WORK:

The scope of work under this contract shall include the turnkey execution on End to End Basis, including but not limited to design, manufacturing, inspection & testing, dispatches, loading , unloading ,storage at site, erection & installation, testing of the installation, associated civil work ,commissioning ,handing over to the purchaser including comprehensive marine cum storage cum erection Insurance (MSE) on "Single Point Responsibility Basis

Scheme Number	Package Name	Total Months for Handing over of the Package, From Zero Date	Total No. of Day for Handing over of the Package From Zero Date
EE20SH1009	PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2	4 months	120 days

Brief Scope of Work related to Erection and Installation work including testing and commissioning and final handover for the above packages shall be as per the NIT conditions with the following salient details.

5.1 Survey, design, engineering, manufacture, shop testing, inspection, packing, dispatch, loading, unloading and storage at site including comprehensive SCE (Storage cum Erection) insurance, assembly, erection, civil structural, architectural work, complete pre-commissioning checks, testing & commissioning at site, also includes all statutory clearances & certification from State Electrical Inspector, Municipal corporation department, Fire officer, Horticulture department , various local bodies like RWA and handing over to the Owner after satisfactory commissioning of complete Packages as defined above for **Cable In feed on Turnkey Basis.**

- Schedule of work shall be as mentioned in the Bill of quantity attached herewith.
- After completion of Erection, Testing & Commissioning of the package awarded, contractor has to obtain the Electrical Inspectorate's Clearance from the Electrical Inspector of Delhi Govt.
- Contractor shall arrange any permission like Road cutting clearance etc. from the Delhi Civic authorities. All Statutory charges and direct fees shall be borne by BYPL.
- All the Labour, plant appliance, ladder, scaffoldings, materials, tool, tackles etc are included in your scope of work.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 26	Bidders seal & Signature
--	--------------	--------------------------

- Adequate number of engineers, supervisors and labours shall be posted at site and the list of the same along with certificate of Qualification of technical staff should be submitted by the Contractor to the Engineer In Charge for checking the adequacy immediately (within seven days) after award of contract. Detailed Organisation chart, along with the qualification of the manpower to be deployed shall submitted along with Bid.
- The Contractor shall also make his own arrangement for the accommodation/conveyance requirements for its staff at site.
- Contractor shall arrange storage for storing the materials, tools, tackles etc. Contractor shall be responsible for all the unloading of the material, marking, staking and storage at site. The insurance for all the storage material shall be included in the policy taken by Contractor. Contractor shall submit the copy of insurance policy to BYPL. In case of any mishappening/damage to the storage material contractor shall be responsible to lodge the claim. Under no circumstances no delay in execution shall be allowed and contractor shall immediately arrange for the replacement without waiting for the settlement.
- All the incoming and outgoing materials, equipment, tools, tackles and any other items related to said work shall be entered into the register kept for this purpose and shall be in the custody of Contractor, however company does not hold any responsibility for any loss or damage of Contractor's material etc.
- All loading/unloading, of materials at work-site shall be contractors responsibility. Involvement of Crane/Hydra/Tractor/Trailer for this type of work shall be in contractors scope. Adequate weather protection shall be provided by the contractor to keep the materials safe from sun & rain by providing covered storage space as well as using tarpaulins.

While carrying out trenchless / open digging works the existing underground cables are liable to get damaged leading to High Risk Safety Hazard to the working people.

To arrest above problem to the best degree possible, there are technology support available, like Cable Route Tracer which is an important tool to detect the live / dead cables underground to the depth upto 3 meters, comfortably. The vendor must employ Cable Route Tracer before start of excavation / trenchless job and submit reports to the Engineer-in-charge for clearance to start the job. The above will minimize the risk of cable damage and improve safety of the working people.

It may please be noted that in case bidders have no "Cable Route Tracers" with him, as a basic necessity tool. Heavy penalty will be imposed on the vendors, if the vendor damages the cables. The cable route tracer shall be of approved make of BYPL.

Special Instruction for cable laying related works:-

- a. Contractor need to conduct sheath voltage test after finishing the cable laying

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 7 of 26	Bidders seal & Signature
--	----------------------------	--------------------------

to check integrity of outer sheath in presence of project engineer.

- b. All cable laying tools and tackles and testing equipment shall be available with contractor in event of order.
- c. Contractor shall submit copy of cable laying schedule to BSES in event of order so that quality checks can be done on sample basis.

6 CONTRACT RATES:

The rates finalized for this order shall be firm for the entire duration of work carried out by the Contractor under the order and are not subject to any variation and escalation for any reason whatsoever.

The cost of insurance during loading/unloading of materials/ equipments during its storage and handling/erection at site for installation is included in the contractor's scope and value is included in the unit rates finalized.

The unit rates finalized are also inclusive of barricading and watch & ward during execution and no separate charges shall be paid for the same.
The cost of training of BYPL Official shall be included in the prices quoted by vendor.

7 TAXES AND DUTIES:

Prices are inclusive of all taxes and duties including labour cess.

However, IT as per applicable rate will be deducted from your bills as Tax Deduction at Source (TDS).

GST is included in the contract price awarded , however GST payment shall be made on submission of GST Registration and self declaration on your letter head stating that contractor have deposited/or will deposit the Tax as per the applicable GST laws. Contractor shall furnish your GST registration number.

Any statutory variations i.e. increase/decrease in Taxes / Duties introduces by central Govt. / State Govt. of shall be reimbursed/recovered to/from Contractor against documentary evidence and proof.

Any variation in taxes shall be applicable only to the direct/price breakup as mentioned in the contract.

CHANGE OF LAW:

"Change in Law" means:

- a) any enactment or issue of any new Applicable Law,
- b) any amendment, alteration, modification, or repeal of any existing Applicable Law or

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 26	Bidders seal & Signature
--	----------------------------	--------------------------

any new or modified directive or order there under,
c) any change or variation in taxes payable in connection with and under this Agreement in each case with respect to a), b), and c) above coming into effect after the date of this Agreement.

8 ACCOMODATION & CONVEYENCE FOR THE STAFF:

The Contractor shall also make his own arrangement for the accommodation/conveyance requirements for its staff at site.

9 STORAGE AT SITE:

Contractor shall arrange the storage at site with the adequate open space / closed storage for contractor's site store for storing the materials, tools, tackles etc.

All the Contractor's storage will be within the site premises. All the incoming and outgoing materials, equipment, tools, tackles and any other items related to said work shall be entered into the register kept for this purpose and shall be in the custody of Contractor, however company does not hold any responsibility for any loss or damage of Contractor's material etc. All loading/unloading, of materials at work-site shall be your responsibility. Involvement of Crane/Hydra/Tractor/Trailer for this type of work shall be in your scope.

Adequate weather protection shall be provided by the contractor to keep the materials safe from sun & rain by providing covered storage space as well as using tarpaulins. Water and Electricity Power shall be arranged by the Contractor at his own. The cost of insurance during loading/unloading of materials/ equipments during its storage and handling/erection at site for installation is included in the contractor's scope and value is including in the above mentioned

Tender value. The unit rates mentioned in annexure is inclusive of barricading and watch & ward during execution and no separate charges shall be paid for the same.

10 SECURITY, WATCH & WARD:

The contractor, at his own cost, shall arrange for the security and watch and ward of the materials, men and machineries at site. Round the clock security alongwith the CCTV shall be provided for the materials stored at the site.

11 DEFECT LIABILITY PERIOD:

Work executed shall be guaranteed against any defect or failure which may arise due to faulty materials, design or workmanship for a period of Twenty Four (24) months from the date of final handing over of the entire package as defined in SCC.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 26	Bidders seal & Signature
--	--------------	--------------------------

If during the Defect Liability Period any works are found to be defective, shall be immediately rectified or repaired, upto BYPL satisfaction, by the contractor at his own cost within Ten (10) days from the date of receipt of intimation from BYPL.

Under no circumstances any extra claim in terms of time and cost shall be entertained for such repair/rectification.

12 PERFORMANCE GUARANTEE:

12.01 Bank guarantee shall be drawn in favour of "BSES YAMUNA Power Ltd" as applicable. The performance Bank guarantee shall be in the format as specified by BYPL.

12.02 Contract performance bank guarantee of total 10% of the contract price shall be submitted within 15 days of award of contract with the validity till completion of the contract period.

12.03 Contractor shall submit the workmanship / equipment performance bank guarantee equivalent to the 10% of the contract value at the time of claiming the last payment as per TERMS OF PAYMENT (Erection, Testing & Commissioning)), with the validity of the bank guarantee till Defect Liability Period i.e. 24 months from the date of Handing over of entire package plus 3 months.

13 COMPLETION PERIOD:

Contractor is required to mobilize your manpower and Tools & Tackles and furnish a list of equipments to be used for erection and commence the execution activity as per instructions of Engineer In-charge. The detailed schedule and milestone completion dates would be as per the contract schedules given from time to time by Engineer In-charge at site.

The time schedule for carrying out this work and period for mobilization shall be as under:

13.1 The Contractor's team should be mobilized at site for commencement of work immediately on receipt of the order.

13.2 The entire work under this order as indicated in the scope of work shall be carried out and completed within 120 days for entire package as defined in SCC. Total completion schedule for Engineering, manufacturing, inspection & testing, packing and forwarding and Transportation till site and Erection Testing & Commissioning shall be as per the milestones timelines defined in SCC.

13.3 A detailed L2 Schedule shall be submitted by the supplier within Fifteen (15) days of LOI. The contractor shall plan parallel working (round the clock working) for completion of work as per schedule and mobilize manpower accordingly.

13.4 Progress Review Meeting between the Contractor and the Engineer In charge shall be held at site at least once in a week. Also a weekly progress report giving the details

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

of the manpower engaged at site and the details of the major job completion shall be submitted to Engineer In-charge.

13.5 The above time schedule must be strictly adhered to and improved upon wherever possible. In the event we find that your work is not progressing in quality or time frame as per above agreed schedule and to our satisfaction, we reserve the right to withdraw the work in whole or in part without further notice and liability of the Company.

13.6 The completion of the work shall have to be certified by Engineer In charge.

13.7 In order to maintain the time schedule, if necessary the Contractor shall carry out the work on all Sunday & Holiday except National Holiday with prior written permission from Engineer-in-Charge.

14 CLEANLINESS & PRECAUTIONS AT SITE TO PREVENT DUST POLLUTION:

All debris shall be removed and disposed of at assigned areas on daily basis. Surplus excavated earth shall be disposed of in an approved manner. In short, the contractor shall be fully responsible for keeping the work site clean at all times. In case of non-compliance, company shall get the same done at Contractor's risk and costs.

While carrying out any civil work including road/ pit digging, plinth/ fence making, road restoration etc contractor shall adhere to below mentioned guidelines.

14.1 No construction material/ debris shall be stored on metalled road.

14.2 Wind breakers of appropriate height on all sides of ear marked area using CGI sheets shall be raised to ensure that no construction material dust fly outside ear marked area.

14.3 The construction material i.e. coarse sand, stone aggregates, excavated earth, cement and any other material to and from the site shall be transported under wet and covered condition to ensure their non-slippage en-route to avoid air contamination.

14.4 The contractor shall provide mask and helmet to every worker working on the construction site and involved in loading/unloading and carriage of construction material and construction debris to prevent inhalation of dust particles.

14.5 Over loading of vehicles shall be strictly prohibited.

14.6 The construction material at site shall be stored under wet and covered condition.

14.7 The dumping sites for temporarily storing the excavated earth shall be properly levelled, watered and rehabilitated by plantation to avoid flying of dust.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

14.8 The worker at the site shall be sensitized to adopt / observe the dust controlled measures in true spirit.

14.9 If any C&D waste is generated at site the same will be transported to the C&D waste site only and the record for the same will be maintained by the agency.

14.10 Wet jet in grinding and stone cutting is being permitted at site.

14.11 The necessary record for dust control is being maintained by the department on day to day basis and being monitored regularly.

The Execution vendors shall be responsible for all the preventive and protective environmental steps as per guidelines. Any violations from the above guidelines have been viewed very seriously by the authorities. Concerned agency is liable for the penalties / other action by the authorities, The Agency shall indemnify BYPL from all liabilities on this account

15 COMMISSIONING & ACCEPTANCE TEST:

After completion of the work, the Contractor shall conduct trial run/ operation in the presence of Engineer In charge. During such trial run the system shall be operated under the supervision of the Contractor. If any rectification/modification required during this period the Contractor shall do all necessary measures.

On satisfactory completion of above, the system shall be deemed to have energized and placed in commercial operation. The Engineer In Charge will issue an acceptance certificate.

16 WORK COMPLETION CERTIFICATION, HANDING OVER:

The work carried out by the Contractor under this order has to be certified by Engineer In-charge for satisfactory completion of work allotted to the contractor with respect to specifications / Field Quality Procedures as per applicable standards. In case of modification/correction to be carried out, contractor shall carry out the said modifications/correction without additional cost. The Contractor shall remain in close contact with Engineer In-Charge at site to report the general findings of the fieldwork during the initial as well as later stage of the work at site.

The contractor shall be solely responsible for any shortage or damage of materials issued to them handling of and / or in storage and erection at site and cost of the same will be recovered from the contractor as certified by Engineer In-Charge. Contractor must submit a periodical material reconciliation statement in the approval format with every Running Bill raise by him or end of every month whichever is earlier. The contractor shall maintain an accurate and exhaustive record detailing out the list of all items received by him for the purpose of erection and keep such record open for the inspection of the company.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

17 PENALTY AND LIQUIDATED DAMAGES

17.1 Penalty: A penalty of 2.5% of bill amount shall be levied in each case of non-compliance of safety practices and site cleanliness.

17.2 Liquidated Damages: In the event of any delay in completion of the work beyond the stipulated time given by in order due to reasons solely attributable to the Contractor, the Contractor shall pay to the Company liquidated damages as per the clause defined in SCC.

18 SAFETY CODE:

The Contractor shall ensure adequate safety precautions at site as required under the law of the land and shall be entirely responsible for the complete safety of their workman as well as other workers at site and premises. The contractor shall not deploy any worker below the age of 18 years.

The contractor shall observe the safety requirements as laid down in the contract and in case of sub-contract (only after written approval of company); it shall be the responsibility of main contractor that all safety requirements are followed by the employees and staff of the sub-contractor.

The contractor employing two hundred employees or more, including contract workers, shall have a safety coordinator in order to ensure the implementation of safety requirements of the contract and a contractor with lesser number of employees, including contract workers, shall nominate one of his employees to act as safety coordinator who shall liaise with the safety officer on matters relating to safety and his name shall be displayed on the notice board at a prominent place at the work site.

The contractor shall be responsible for non-compliance of the safety measures, implications, injuries, fatalities and compensation arising out of such situations or incidents.

In case of any accident, the contractor shall immediately submit a statement of the same to the owner and the safety officer, containing the details of the accident, any injury or casualties, extent of property damage and remedial action taken to prevent recurrence and in addition, the contractor shall submit a monthly statement of the accidents to the owner at the end of each month.

19. STATUTORY OBLIGATIONS:

The Contractor shall take all steps as may be necessary to comply with the various applicable laws/rules including the provisions of contract labour (Regulation & Abolition Act) 1970 as amended, minimum wages Act, 1984, Workman Compensation Act, ESI Act, PF Act, Bonus Act and all other applicable laws and rules framed there

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

under including any statutory approval required from the Central/State Govt. Ministry of Labour. Broadly, the compliance shall be as detailed below, but not limited to:

- a) An Electrical license issued by Govt.of Delhi.
- b) PF Code No. and all employees to have PF A/c No. under PF every Act, 1952.
- c) All employees to have a temporary or permanent ESI Card as per ESI Act.
- d) ESI Registration No.
- e) PAN No.
- f) Work Contract Tax Registration Number/ GSTN Registration. g) Labour License under Contract Labour Act (R & A) Act 1970

(Engineer-in-charge responsible for execution of the job should obtain a copy of Labour License before start of the work by the contractor.)

The Contractor must follow:

- a) Third party Insurance Policy before start of work.
- b) To follow Minimum Wages Act prevailing in the state.
- c) Salary / Wages to be distributed in presence of representative of Company's representative not later than 7th of each month.
- d) To maintain Wage- cum - Attendance Register.
- e) To maintain First Aid Box at Site.
- f) Latest P.F. and E.S.I. challans pertaining to the period in which work was undertaken along with a certificate mentioning that P.F. and E.S.I. applicable to all the employees has been deducted and deposited with the Authorities within the time limits specified under the respective Acts.
- g) Workman Compensation Policy. {If applicable}
- h) Labour license before start of work. {If applicable}

20. WORKMAN COMPENSATION:

The Contactor shall take insurance policy at his own cost under the Workman Compensation Act to cover such workers who are not covered under ESI and PF by the Contractor however engaged to undertake the jobs covered under this order and a copy of this insurance policy will be given to Company for reference and records. This insurance policy shall be kept valid at all times. In case there are no worker involve other than those who are covered under ESI and PF by the Contractor, the Contractor shall certify for the same,

The contractor shall keep the company indemnified at all times, against all claims of compensation under the provision of Workmen Compensation Act 1923 and as amended from time to time or any compensation payable under any other law for the time being workman engaged by the contractor/sub-contractor/sub-agent in carrying out the job involved under this work order and against costs and expenses, if any, incurred by the company in connection therewith and without prejudice to make any recovery.

The company shall be entitled to deduct from any money due to or to become due to the Contractor, moneys paid or payable by way of compensation as aforesaid

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 14 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

or cost or expenses in connection with any claims thereto and the Contractor shall abide by the decision of the Company as to the sum payable by the Contractor under the provisions of this clause.

21. STAFF AND WORKMAN:

It shall be responsibility of contractor

(a) To obtain Contract Labour License from the concerned authorities and maintain proper liaison with them. Necessary Forms for obtaining Labour License would be issued by the company. However you will bear all expenses for obtaining Labour license and registration in PF Department for your scope of work. You will deposit PF of your staff/laborer each month and all related documents should be furnished to us.

b) To obtain workman insurance cover against deployment of workers etc.

(II) To maintain, proper records relating to workmen employed, in the form of various Registers, namely,

- a) Register of workmen.
- b) Register of muster roll.
- c) Register of overtime.
- d) Register of wages.
- e) Any other register as per latest amendment Labour Act.

The records shall be in the prescribed formats only.

(III) To disburse monthly wages to your workers/ supervisors in time and in the presence of Company representatives or as directed by the Labour authorities.

(IV) To maintain proper liaison with the Project authorities, local police and all other government and local bodies.

(V) To pay your workmen at least not less than the minimum prescribed wages as per state/Central Labour laws as may be, applicable. The contractor shall, be responsible for compliance of all the provisions of minimum Wages Act, PF, ESIC Act workmen Compensation Act and Contract Labour Regulation & Abolition Act the rules made there under. In case of non-compliance of the statutory requirements. The company would take necessary action at the risk and cost of the Contractor.

(VI) To employ required number of skilled/semi-skilled and unskilled workmen as per site requirement to complete the entire project as per schedule. To provide safety shoes, safety helmets, safety belts, gloves etc. to your worker/staff as per requirement during erection work.

(VII) To employ necessary engineering and supervisory staff for completion of the Project in time. While day-to-day management of the site and supervision of the works shall be the responsibility of your Engineer - In charge, he will report to the

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 15 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

Engineer in charge to assist him to discharge the overall responsibility of the execution of the project.

22. HUMAN RESOURCE ISSUES:

22.1 The CONTRACTOR would execute these works through their own resources.

22.2 The CONTRACTOR shall bear all expenses/cost to be incurred towards salary, allowances, perks, traveling allowances, advances, insurance, safety measures, security, transportation and all other misc. expenses etc. of their employees/ workmen during the tenure of AMC. Also, the CONTRACTOR shall be sole responsible for making payment for Out-patient department, Hospitalization, Compensation thereof in case of any accident, injury or death.

22.3 ID CARD: No contractor will issue any ID cards to their staff on their own .All ID Cards for the workforce will be issued by BYPL Security ID Card Cell only. Contractors should maintain the records of Identity Cards of their employees and whenever any employee quits / is removed then his/her Identity card should be collected & submitted to BYPL Security ID Card Cell. Penalty will be imposed on the vendor in case of violation of the above rule.Contractors shall submit the detail list of the employees that they are going to be hire to BYPL Security before start of the contract.

22.4 The CONTRACTOR to deploy their manpower immediately for carrying out the work as specified above.

22.5 The CONTRACTOR should ensure that there are no disputes regarding service, payment etc of the persons engaged by him, anytime during the currency of the contract. At no point of time during the currency of contract, the CONTRACTOR's employees shall insist upon the COMPANY for employment, wages, and allowances or any other related matter, payment etc.

22.6 The CONTRACTOR shall not deploy the manpower below the age of 18 years.

22.7 The CONTRACTOR shall not deploy the female manpower between 7 PM to 6 AM.

22.8 The CONTRACTOR shall be directly responsible for any / all disputes arising between him and his persons and keep the COMPANY indemnified against all losses, damages and claims arising thereof. The CONTRACTOR shall resolve any dispute of their manpower. All the legal dues of their manpower is to be paid on due date or within 8 days on the termination of manpower.

22.9 All safety wears required for the CONTRACTOR's manpower during the execution of work such as safety shoes, safety helmets, hand gloves, safety belt, goggles etc. must be provided by the CONTRACTOR at his own cost and he shall ensure that his employees regularly use such safety gears while executing COMPANY's work.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 16 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

22.10 The CONTRACTOR shall be responsible for discipline of his manpower and shall adhere to the disciplinary procedure set by the COMPANY at site. The COMPANY shall be at liberty to object to the presence of any representative or employees of the CONTRACTOR at the site, if in the opinion of the COMPANY such manpower has done any act of misconduct or negligence or otherwise undesirable, then the CONTRACTOR shall remove such a person objected to and provide a competent replacement immediately.

22.11 The CONTRACTOR shall ensure that he has complied with the following:

- has paid minimum wages to his manpower as per the rate notified from time to time by the Government of National Capital Territory of Delhi.
- Contractor shall disburse the salary of his staff through ECS only.

22.12 Deduct and deposited ESI and PF contribution. Copies of the same shall be submitted.

22.13 The COMPANY reserves the right to demand the CONTRACTOR's services on holidays as well as beyond the normal working hours. The Engineer In-charge shall communicate in writing for any work required to be done during Holidays.

22.14 The CONTRACTOR will ensure that none of their person is engaged in any unlawful activities subversive of the COMPANY's interest failing which suitable action may be taken against the CONTRACTOR as per the terms and conditions of this tender.

22.15 The CONTRACTOR shall be liable for payment of all taxes and duties as applicable, to the State/ Central Govt. or any local authority.

22.16 The CONTRACTOR's employees shall not be treated as COMPANY's employees / persons for any purpose whatsoever & facilities/ benefits applicable to the COMPANY's employees shall not be applicable to CONTRACTOR's employees. If due to any reasons whatsoever the COMPANY is made liable to meet any obligation under any of the laws & enactment etc, for any reason whatsoever the same shall be recovered from the CONTRACTOR or from any of the bills payable to him or failing which it shall be recovered as per law.

22.17 The CONTRACTOR shall be responsible and shall comply with the provision of all the STATUTORY ACTS APPLICABLE. Special attention of the CONTRACTOR is drawn towards the compliance of provision of the following statutes: (along with the latest amendments/additions):

22.17.1 The Child Labour (Prohibition and Regulation) Act, 1986.

22.17.2 The Contract Labour (Regulation and Abolition) Act, 1970.

22.17.3 The Employee's Pension Scheme, 1995.

22.17.4 The Employee's Provident Funds and miscellaneous provisions Act, 1952.

22.17.5 The Employees State Insurance Act, 1948.

22.17.6 The Industrial Disputes Act, 1947.

22.17.7 The Maternity Benefit Act 1961.

22.17.8 The Minimum Wages Act, 1948.

22.17.9 The Payment of Bonus Act, 1965.

22.17.10 The Payment of Gratuity Act, 1972.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 17 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

- 22.17.11 The payment of Wages Act, 1936.
- 22.17.12 The Delhi Shops & Establishment Act, 1954.
- 22.17.13 The Workmen's Compensation Act. 1923.
- 22.17.14 The Employer's Liability Act, 1938.

The Contractor shall furnish the above specified compliances as per the format attached as Annexure I.

Contractor shall adhere to the Vendor Code of Conduct as specified in the NIT.

23. INSURANCE:

23 a) THIRD PARTY INSURANCE:

Before commencing the execution of the work the contractor shall take third party insurance policy at his own cost to insure against any damage or loss or injury which may occur to any property / public property or to any person or any employee or representative of any outside Agency/ the company engaged or not engaged for the work of the company, by or arising out of the execution of the work or temporary work or in carrying out of this Agreement. For third party insurance policies, the contractor shall be responsible for settlement of claims with the underwriters without any liability on the purchaser / owner and will arrange replacements / rectification expeditiously without a waiting settlement by insurance claim at contractors own cost.

23 b) ACCIDENTAL INSURANCE POLICY FOR LIFE COVER:

Before commencing the execution of the work the CONTRACTOR shall take Accidental insurance policy for the staff engaged by him for this work to insure against any loss of life which may occur during the contract for the work of the COMPANY. The policy shall have coverage of Rs. 10 Lacs (Table C- Death + Permanent Total Disability + Partial permanent Disability due to external accidents). The Contractor shall be responsible for on the spot same day claim settlement with the victim's legal heirs without waiting for settlement by insurance claim without any liability on BYPL. The premium amount for such life cover policy shall be borne by the contractor. The contractor shall furnish copy of policy when demanded by BYPL.

23 c) INSURANCE FOR MAN, MATERIAL & MACHINERY DEPLOYED AT SITE:

Contractor shall be responsible for the insurance for his own man , material and machinery deployed at site for the package awarded. Contractor shall furnish the copy of this insurance policy to the purchaser, prior start of work.

24. SECURITY:

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 18 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

Adequate number of trained Security Guards shall be deployed both at the storage yard and stores as well as places of work to prevent theft and pilferage of material and accessories and various other materials. All security rules and safety rules enforced at site by company shall be strictly observed.

25. ENVIRONMENTAL, HEALTH & SAFETY PLAN:

Contractor will make ensure that the Environment, Health & Safety (EHS) requirements are clearly understood and faithfully implemented at all levels at site as per instruction of Company. Contractors must comply with these requirements:

- a) Comply with all of the elements of the EHS Plan and any regulations applicable to the work
- b) Comply with the procedures provided in the interests of Environment, Health and Safety
- c) Ensure that all of their employees designated to work are properly trained and competent
- d) Ensure that all plant and equipment they bring on to site has been inspected and serviced in accordance with legal requirement and manufacturer's or suppliers' instructions
- e) Make arrangements to ensure that all employees designated to work on or visit the site present themselves for site induction prior to commencement of work
- f) Provide details of any hazardous substances to be brought onsite
- g) Ensure that a responsible person accompanies any of their visitors to site

All contractors staff is accountable for the following:

- 1. Use the correct tools and equipment for the job and use safety equipment and protective clothing supplied, e.g. helmets, goggles, ear protection, etc. as instructed
- 2. Keep tools in good condition
- 3. Report to the Supervisor any unsafe or unhealthy condition or any defects in plant or equipment
- 4. Develop a concern for safety for themselves and for others
- 5. Prohibit horseplay
- 6. Not to operate any item of plant unless they have been specifically trained and are authorized to do so.

26. TEST CERTIFICATE & QUALITY ASSURANCE:

The Contractor shall procure all equipment from genuine sources as approved by the Company and as per Company specifications. The Contractor shall submit all the test certificates and joint inspection reports related to major equipment wherever applicable.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 19 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

The contractor shall ensure for the strict compliance to the specifications and Field Quality Procedures issued by company / Engineer in-charge.

27. SUB-CONTRACTING / SUBLETTING:

CONTRACTOR shall not assign or transfer the whole or any part of this Work Order or any other benefits accruing there from nor shall it subcontract / sublet the whole or any part of the Works without the prior written consent of COMPANY.

In the event the contractor assigns this work order, contractor's assignees shall be bound by the terms and conditions of this work order and shall , if deemed necessary by COMPANY at the time of such assignment, undertake in writing to be so bound by this Work Order.

Notwithstanding the subletting / subcontracting of any portion of the works, contractor shall remain wholly responsible for the carrying out, completion and satisfactory execution of Works in all respects in accordance with this Work Order, specification, approved drawings and data sheets.

28. INDEMNITY:

Contractor shall indemnify and save harmless COMPANY against and from any and all liabilities, claims, damages, losses or expenses arising due to or resulting from:

- a) any breach non-observance or non-performance by contractor or its employees or agents of any of the provisions of this Work Order.
- b) any act or omission of contractor or its employees or agents.
- c) any negligence or breach of duty on the part of contractor, its employees or agents including any wrongful use by it or them of any property or goods belonging to or by COMPANY.
- d) The vendor shall submit an Indemnity Bond against any damages / loss of free issued materials.

Contractor shall at all times indemnify COMPANY against all liabilities to other persons, including he employees or agents of COMPANY or contractor for bodily injury, damage to property or other loss which may arise out of or in consequence of the execution or completion of Works and against all costs charges and expenses that may be occasioned to COMPANY by the claims of such person

29. EVENTS OF DEFAULTS:

COMPANY may, without prejudice to any of its other rights or remedies under the Work Order or in law, terminate the whole or any part of this Work Order by giving written notice to the Contractor, if in the opinion of COMPANY, contractor has neglected to proceed with the works with due diligence or commits a breach of any of the provisions of this work order including but not limited to any of the following cases:

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 20 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

- a) Failing to complete execution of work within the terms specified in this work order.
- b) Failing to complete works in accordance with the approved schedule of works.
- c) Failing to meet requirements of specifications, drawings, and designs as approved by COMPANY.
- d) Failing to comply with any reasonable instructions or orders issued by COMPANY in connection with the works.
- e) Failing to comply with any of the terms or conditions of this work order.

In the event COMPANY terminates this work order, in whole or in part, on the occurrence of any event of default, COMPANY reserves the right to engage any other subcontractor or agency to complete the work or any part thereof, and in addition to any other right COMPANY may have under this work order or in law including without limitation the right to penalize for delay under clause 15.0 of this work order, the contractor shall be liable to COMPANY for any additional costs that may be incurred by COMPANY for the execution of the Work.

30. RISK & COST:

If the Contractor fails to execute the work as per specification / as per the direction of Engineer's In-charge within the scheduled period and even after the extended period, the contract shall get cancelled and the company reserves the right to get the work executed from any other source at the Risk & Cost of the Contractor. The Extra Expenditure so incurred shall be debited to the Contract.

31. ARBITRATION:

To the best of their ability, the parties hereto shall endeavor to resolve amicably between themselves all disputes arising in connection with this LOA. If the same remain unresolved within thirty (30) days of the matter being raised by either party, either party may refer the dispute for settlement by arbitration. The arbitration to be undertaken by two arbitrators, one each to be appointed by either party. The arbitrators appointed by both the parties shall mutually nominate a person to act as presiding arbitrator before entering upon the reference in the event of a difference between the two arbitrators and the award of the said presiding arbitrator in such a contingency shall be conducted in accordance with the provisions of the Indian Arbitration & Conciliation Act, 1996 and the venue of such arbitration shall be in the city of New Delhi only.

32. SECURITY CLAUSE:

The technical information, drawing and other related documents forming part of work order and the information obtained during the course of investigation under this work order shall be the Company's executive property and shall not be used for any other purpose except for the execution of the work order. The technical information drawing, records and other documents shall not be copied, transferred, or divulged

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 21 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

and/ or disclosed to third party in full/part, not misused in any form whatsoever except to the extent for the execution of this work order.

These technical information, drawing and other related documents shall be returned to the Company with all approved copies and duplicates including drawing/plans as are prepared by the Contractor during the executions of this work order, if any, immediately after they have been used for agreed purpose.

In the event of any breach of this provision, the contractor shall indemnify the Company against any loss, cost or damage or claim by any party in respect of such breach.

33. TERMINATION DUE TO NON PERFORMANCE:

"During the course of the execution, if at any time BSES observe and form an opinion that the work under the order is not being performed in accordance with the terms of this Agreement, BSES reserves its right to cancel this Agreement giving 15 days notice mentioning the reason for the termination of the agreement and BSES will recover all damages including losses occurred due to loss of time from Contractor.

34. TERMINATION BY EMPLOYER CONVENIENCE:

The owner at any time terminate the contract for any reason, by giving the contractor a notice of termination. Upon receipt of the notice of termination, the contractor shall either within 14 days of receipt of such notice, or on the date specified in the notice of termination, carry out the following : Cease all further work, except for such work as the owner may specify in the notice of termination for the sole purpose of protecting that part of the facilities already executed, or any work required to leave the site in a clean and safe condition.

- Terminate all subcontracts, except as mentioned below.
- Remove all Contractor's equipment from the site, repatriate the contractor's and its sub-contractor's personnel from the site, remove from the site any wreckage, rubbish and debris of any kind, and leave the whole of the site in a clean and safe condition.
- Deliver to the owner the parts of the facilities executed by the contractor up to date of termination.
- To the extent legally possible, assign to the owner all right , tile and benefit of the contractor to the facilities and to the plant and equipment as at the date of termination, and as may be required by the owner, in any subcontracts concluded between the contractor and its sub-contractors.
- Deliver to the owner all non-proprietary drawings, specifications and other documents prepared by the contractor or its sub-contractors as at date of termination in connection with the facilities. In the event of termination of the contract by the owner,

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 22 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

under this clause, the owner shall pay to the contractor the following amounts after setting off the owner's claim if any under the contract:

- a) The contract price, properly attributable to the parts of the facilities executed by the contractor as of the date of termination.
- b) The costs reasonably incurred by the contractor in the removal of the contractor's equipment from the site and in the repatriation of the contractor's and its sub contractors personnel.
- c) Pre- approved and reasonable cost of satisfying all other obligations, commitments and claims that the contractor may in good faith have undertaken with third parties in connection with the contract and that are not covered above.

35. QUALITY:

Contractor shall ensure that strict quality is maintained and execution of works under this Work Order and Works are executed in conformity with the Specification.

All tools, tackles, instruments and other equipments used in the execution of the Works shall be duly calibrated as required and Contractor shall maintain proper records of such tools, tackles, instruments and / or equipment.

The contractor shall submit SQP indicating Customer Holding Point for design, manufacture, inspection, testing, packing, forwarding, transportation including shop painting and final painting for Purchaser's review and approval.

The contractor shall submit Field Quality Assurance and Filed Quality Control Plan (FQP) indicating Customer Hold Point for unloading, receiving, storage at site, transportation, handling at site, erection, testing, pre-commissioning & commissioning for Purchaser's review and approval as per applicable provisions of Technical Specifications.

The Contractor shall submit a Field Erection Procedure for the scope of work under the Contract Agreement. The same shall be subject to the approval of the Purchaser and the work shall be carried out in accordance with such approved procedures.

36. CONSTRUCTION WATER & POWER:

Construction Water and power shall be arranged by Contractor at his own cost.

37. PROGRESS REPORTS OF WORK EXECUTION:

During the various stages of manufacturing and erection of the critical equipments in the pursuance of the Contract, the Contractor shall at its own cost submit periodic progress reports as may be reasonably required by the Purchaser with such materials as charts, networks, photographs, test certificates, etc. Such progress

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 23 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

reports shall be in the form and size as may be required by the Purchaser and shall be submitted in adequate number of copies to be notified by the Purchaser

The quantitative progress report of the works by reference to the project schedule in sufficient detail should permit the Purchaser to assess performance, plan witness dates and evaluate forecasts, including reports on key Sub-contracts (as applicable). Within 7 days of the submission of each such report and at such other times as the Purchaser may reasonably request, the Contractor and the Purchaser shall meet to discuss progress.. Weekly progress reports shall include the following sections:

- a) Executive summary
- b) Description of the work and services performed and goods and materials delivered and erected during the preceding week.
- c) Necessary photographs of work done in the manufacturer's shop and erection site which shall be taken when and where indicated by the Purchaser. Photographs shall be approximately 100 x 125 mm in size including a margin of 5 mm side for fixing. Adequate numbers of photographs shall be submitted indicating various stages of manufacture and erection of critical items. Each photograph shall contain the date, the name of the Contractor and the title of the view taken.
- d) Updated project schedule showing progress to the end of the week (as percentages completed of the Contractor's activities broken down into significant elements of the works), and the current schedule of activities and the targets for the next week.
- e) Identification of areas with foreseeable problems which in the opinion of the contractor may affect the project schedule.
- f) Such other information and supporting documentation as the Purchaser may require satisfying himself about the timely manufacture, delivery and erection of equipment as per contract.

The Purchaser shall advise the Contractor about the number of copies of progress reports and, where relevant, photographs he has to submit each week together with the names and addresses of persons to whom they are to be sent. Purchaser will also advise the contractor regarding the format of the Monthly Progress report.

38. FREE ISSUES OF MATERIAL AND /OR EQUIPMENT:

The Purchaser issued Free Issue Material/Equipment to Vendor in order that Vendor may fulfill its obligations under the Agreement, shall remain the property of Purchaser and shall be clearly labelled as such by Vendor until delivery of the completed Goods in accordance with the terms of the Agreement. Risk of loss in respect of all such Free Issue Items shall pass to Vendor upon receipt of such items by Vendor and remain with Vendor until delivery of the completed Goods to Purchaser in accordance with the terms of the Agreement. Vendor shall maintain all such Free Issue Items in good

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 24 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

condition and shall use them solely in connection with the requirements of the Agreement. Disposal of surplus items shall be in accordance with written instructions from Purchaser. The vendor shall submit an Indemnity Bond to this effect, as per the format.

39. PROTECTION OF PROPERTY:

The Contractor shall be responsible for any damage resulting from his operation. He shall also be responsible for protection of all persons including members of public; and employees of the PURCHASER & the PURCHASER; employees of the Contractors & Subcontractors; and all public and private property including structures, buildings, other plants and equipment and utilities either above or below the ground.

The Contractor shall ensure provision of necessary safety equipment such as barriers, sign boards, warning lights and alarms, etc to provide adequate protection to persons and property. The Contractor shall be responsible to give reasonable notice to the PURCHASER & the PURCHASER of public or private property and utilities when such property and utilities are likely to get damaged or injured during the performance of his works and shall make all necessary arrangements with such PURCHASER, related to removal and/or replacement or protection of such property and utilities.

40. VARIATIONS / AMENDEMENTS:

Any additional work beyond the scope enumerated in the work order above shall be carried out as per the instructions of Engineer-In Charge. The company shall not entertain any claim or increase in the Work Order value due to execution of such additional work if the same is not approved by Engineer in Charge, in written form.

41. ACCEPTANCE

Acceptance of this work order implies and includes acceptance of all terms and conditions enumerated in this work order in the technical specification and drawings made available to you consisting of general conditions, detailed scope of work, detailed technical specification & detailed equipment, drawing. Complete scope of work and the Contractor's and Company's contractual obligation are strictly limited to the terms set out in the work order. No amendments

to the concluded work order shall be binding unless agreed to in writing for such amendment by both the parties.

However, during the course of the execution of the work order, if at any time the Company's representative observe and form an opinion that the work under the work order is not being performed in accordance with the terms of this work order, the company reserves its right to cancel this work order forthwith without assigning any reason and the Company will recover all damages including losses occurred due to loss of time from the Contractor.

We request you to please sign the duplicate copy of this work order as a token of your acceptance and return to us.

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 25 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

Annexure - I

The Contractor must submit the following to Engineer-In-Charge before commencement of work:

- a) An Electrical license. (If applicable)
- b) PF Code No. and all employees to have PF A/c No. under PF every Act, 1952.
- c) All employees to have a temporary or permanent ESI Card as per ESI Act.
- d) ESI Registration No. e) PAN No.
- f) Work Contract Tax/VAT Registration Number.
- g) Labor License under Contract Labor Act (R & A) Act 1970(All Engineer-in-charge responsible for execution of the job should obtain a copy of Labor License as per guidelines of HR department before start of the work by the contractor.)

The Contractor must follow:

- a) Third party Insurance Policy before start of work.
- b) To follow Minimum Wages Act prevailing in the state.
- c) Salary/ Wages to be distributed in presence of Company's representative not later than 7th of each month.
- d) To maintain Wage- cum - Attendance Register.
- e) To maintain First Aid Box at Site.
- f) Latest P.F. and E.S.I. challans pertaining to the period in which work was undertaken along with a certificate mentioning that P.F. and E.S.I. applicable to all the employees has been deducted and deposited with the Authorities within the time limits specified under the respective Acts.
- g) Workman Compensation Policy. (If applicable)
- h) Labor license before start of work. (If applicable)
- i) Group personnel accident insurance shall have coverage of Rs. 10 Lacs (Table C-Death + Permanent Total Disability + Partial permanent Disability due to external accidents).

Erection Conditions of Contract - ECC NIT NO: CMC/BY/20-21/RB/SV/48	Page 26 of 26	Bidders seal & Signature
--	-----------------------------	--------------------------

CONTRACT HEALTH AND SAFETY PLAN

1 OBJECTIVE

The objective of the Contractor Health and Safety plan is to lay down clear guidelines for all Vendors / contractors and manpower agencies (including their associates, staff and agents) which would facilitate them to observe all statutory and regulatory rules and regulations, comply with applicable standards of Central Electricity Authority (Measures relating to safety and electric supply) Regulations, 2010 & (safety requirements for construction, operation and maintenance of electrical plants and electric lines) Regulations, 2011, BYPL EHS policy, Safety Manual Guidelines, and SOPs and thus, ensure creation of safe working environment for all stakeholders of our network.

2 SCOPE

It is applicable to all contracts, work orders of any kind and cost will be subjected to the provisions of this document.

Small Contracts: Contracts which satisfy all the criteria listed under the head "Small Contracts".

Major Contracts: Contracts which satisfy any two or more criteria listed under the head "Major Contracts"

Criteria	Small Contracts	Major Contracts
Value of Contract	< Rs. 20,000,00/- (less than Rs. Twenty Lac)	>= Rs. 20,000,00/- (Equal or more than Rs. Twenty Lac)
Period	Period less than 1 year	Any period
Working on energized electrical equipment	No	Yes
Working on height (above 1.8 Mtrs from ground)	No	Yes
Work involving construction activity	No	Yes
Working with hazardous goods or chemicals	No	Yes
Work involving danger to general public	No	Yes

Exclusions: Exceptions for major and small contract are – in house software development, supply of material or equipment but no direct or indirect installation of the same material, administration contracts (courier, water supply, printing, security, transport, etc.). The facility management (housekeeping) contract will always be treated as a small contract.

3 GENERAL SAFETY CONDITIONS

For small contracts, the contractor shall assign the duties of Safety Representative to the Work Supervisor. Work Supervisor will deliver all duties and responsibilities of Safety Supervisor as detailed in this document.

For Major contracts, the contractor will appoint Safety supervisor, engineer / manager for the works in BYPL. The Contractor shall make all necessary arrangements for getting their workforce safety trained and competency checked from the safety team of BYPL before deployment in the field.

Safety Representative of Contractor will formally become the nodal point for safety concerns for BYPL. Contractor shall not frequently transfer or terminate the services of any of the safety representatives appointed for BYPL work site. Contractor will be required to provide all applicable infrastructure and power to ensure smooth working of the safety representative to maintain a sound safety management system. In the major contracts safety representative will not be assigned any other activity at site apart from the works related to safety management.

The Safety Representative of the Contractor shall be required to meet and follow the instructions of the Engineer In-charge and EHS team of BYPL. He shall be responsible for providing the MIS and/or any other relevant information, as and when desired, within the stipulated time frame as per the requirements of BYPL. Any non-conformance to safety will lead to the negative marking or issue of safety violation challan/tokens which shall affect the monthly evaluation and performance of Contractor.

All contracts where Contractor has to depute vehicle for their staff and equipment to move from one location to other, the Contractor shall ensure that vehicle complies all required statutory clearances and requirement as per The Motor Vehicle Act, 1988 and are in good & safe state of working.

The Contractor shall display the name of the Safety representative at all its sites including zonal and divisional office.

4 QUALIFICATION AND EXPERIENCE OF THE SAFETY PERSONAL

Qualification and experience required for the safety and site personnel are as following:

Safety Supervisor: It is mandatory that educational qualification of safety supervisor be ITI (electrician trade) / Diploma (Any branch of engineering) and he has a working experience on electrical system / network of at least 5 yrs for ITI and 3 years for Diploma holder. Having formal experience of the safety systems will be an added advantage

Safety Engineer: It is mandatory that educational qualification of safety engineer be at least diploma (electrical) and he has working experience on electrical system of at least 3 yrs. Having the formal experience of the safety systems will be an added advantage.

Safety Manager: The educational qualification of safety manager should be graduate engineer with working experience on electrical system / network of at least 3 yrs. OR Diploma in Industrial Safety with working experience of 05 years including at least 02 years on electrical network.

Site Skilled Personnel: For all responsibility related to site activities and operations, the BA shall employ only qualified and skilled persons and shall comply the provisions of section 19 & 29 of Central Electricity

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 2 of 17	Bidders seal & Signature
--	--------------	--------------------------



Authority (Measures relating to safety and electric supply) Regulations, 2010. Persons holding valid approvals only by any Government approved agency or a competency assessment panel or a team set up by TPDDL shall be allowed to perform the High Risk / High Hazard activities (refer page 1). The skill / qualification required for the electrician and electrical supervisor are given in annexure 5. The contracts related to maintenance of Distribution Network, Distribution Projects, EHV Projects, maintenance of Sub-Transmission Network, MMG & EAG, maintenance and operation of street lights, shall preferably have at least 20 per cent of ITI qualified electricians in the first year of the contract. This figure shall preferably be incremented by 15 per cent every subsequent year.

5 Requirements from the Safety Representative(s)

Safety training of 4hrs/employee/month and one day of safety induction training to all new employees.

- Safety Talk / tool box talk before start of shift to all his workmen
- Ensuring the availability & proper usage of the safety equipment (PPE)
- Periodic inspection of PPE to ensure their serviceability
- Ensuring the adherence to standard operating procedures of BYPL
- Safety inspections / audits as per the process of BYPL
- Working in close coordination EHS department of BYPL
- Reporting of unsafe acts, unsafe conditions, near miss, incident or accident to Engineer In-Charge and EHS department of BYPL immediately after its occurrence.

Ensuring compliance with safety and other laws as may be applicable and providing for safety assurance.

6 Safety Induction Training

The Contractor shall not deploy any person at work place / site without Safety Induction Training. It is desired that Safety representative of the Contractor to impart the general safety training to each employee of duration 4 hrs per month. The training will be organized at Contractor level and the record to be sent to engineer in-charge and EHS department of BYPL every month.

7 List of Personal Protective Equipment (PPE) and Maintenance schedule

Contractor shall commence the project or any work only when the required PPE are made available to the team of employees involved in the work. Each PPE of Contractor shall be checked / inspected by the safety representative / supervisor at zone before the work start or as prescribed in the list. Safety representative shall regularly check the healthiness of each PPE allocated to lineman. Suitable record shall be maintained at zone. Defective PPE shall be immediately replaced or within 24 hours by the Contractor. In no case linemen or any other official of Contractor may be allowed to work with defective PPE. It is preferred that Contractor ensures minimum stock of each PPE for immediate replacement with defective one.

The PPE shall be IS / BS / CE marked and exactly as per the standard or specification mentioned in the *annexure 1*. Working without PPE / non-standard PPE shall be treated as safety violation and penalty as stated in section 12 of this document. If BYPL finds that Contractor has not provided the adequate / appropriate PPE to their staff, BYPL may provide the PPE to Contractor at the risk and actual cost of the PPE. Amount as decided by the management shall be charged to Contractor and same shall be first recovered from the current bill of Contractor or any future payment to be made to Contractor. In the event

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 17	Bidders seal & Signature
--	--------------	--------------------------



of any balance amount still left for recovery, the same shall be adjusted against retention amount or by invoking bank guarantee submitted by Contractor.

8 Integrated Management System & Audits

The Contractor shall work in the framework of Integrated Management System (IMS) and shall maintain documentation as prescribed in the IMS Manual of BYPL.

All contractors during their currency of contract shall strive to continuously improve and demonstrate strict compliance to ISO 9001, ISO 14001 & OHSAS 18001 standards of BYPL.

To verify compliance and to continually improve the management system, all contractors shall be subjected to both internal & external audits.

8.1 HIRA

The safety representative will be required to conduct the HIRA (Hazard Identification and Risk Assessment) of the process and work undertaken at least once in a year or every time if a new process / activity / machine is introduced or whenever an accident take place. The risk identified to be addressed suitably with –

Engineering Control
Administrative Control, and
Personal Protective Equipment.

The safety representative of Contractor shall inform and educate for the identified risk and hazard control methods to employees, supervisor and engineer as well as the engineer in-charge and EHS department of BYPL.

8.2 Working at Height

The Contractor shall ensure that all works carried out at a height of 2 Meter or more shall only be started after obtaining a permit to work at height, which shall be issued as per the procedure of BYPL by authorized personnel.

The contractor shall ensure that all control measures mentioned and agreed through above work permit or as deemed necessary by BYPL are enforced and complied all the time during activities carried out at height.

9 Safety Performance and Safety MIS

The Contractor shall maintain good practice of safety all through the contract duration. Safety shall always be of paramount importance during the contract period. Safety performance will be monitored throughout the period and no relaxation will be given for bad performance. Contractor with good track record and excellent performance will be rewarded suitably. The Contractor has to provide monthly "Performance Report – Safety" to engineer in-charge and EHS department of BYPL this shall be part of monthly bill along with training details. Performa of the report is enclosed as *annexure 2 to 5*.

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 4 of 17	Bidders seal & Signature
--	--------------	--------------------------

10 Pre – Employment Medical Check-up and Fitness of employees engaged for the critical works

The contractor shall arrange a medical examination of all his employees including his sub-contractor employees like lineman, ALM, supervisor, Fitter, welders, gas cutters, drivers, workers supposed to work at height (and any other trade specified deemed necessary by BYPL at the time of deployment then annually) before employing, after illness or injury, if it appears that the illness or injury might have affected his fitness and, thereafter, once in every year as per the provisions of applicable laws or as prescribed by BYPL with proper record.

The Contractor shall submit the health fitness certificate for all those workers involved in climbing the pole or working at height for following diseases:

- Epilepsy
- Colour blindness
- Deafness
- Vertigo & height phobia

Every year Contractor will give an undertaking stating that all the employees are fit to work and have not developed aforesaid diseases.

Records of medical examination as described above shall be maintained at the contractor premises and shall be promptly produced as and when demanded by BYPL.

No person about whom the Contractor knows or has reason to believe that he is a deaf or he has a defective vision or he has a tendency to giddiness shall be required or allowed to work in any O&M operation or other construction work which is likely to involve a risk of any accident either to the worker himself or to any other person.

11 Suspension of Work

BYPL shall have the right at its sole discretion to suspend the work till compliance of safety norms, if in its opinion the work is being carried out in such a way that it may cause accidents and endanger the safety of the persons and / or property, and / or equipments.

In such cases, the contractor shall be informed in writing about the nature of hazards and possible injury /accident and he shall comply to remove all shortcomings promptly. Decision of BYPL shall be conclusive and binding on the Contractor in such aspects.

The contractor shall not be entitled to damages / compensation for suspending of work due to safety reasons and the period of such stoppage of work will not be taken as an extension of time for completion of the facilities as per the work order and will not be the ground for wavier of levy of liquidated damages.

The contractor shall follow and comply with all safety Rules of BYPL, relevant provisions of applicable laws pertaining to the safety of workmen, employees plant and equipment as may be prescribed from time to time without any demur, protest or contest or reservation. In case of any inconformity between statutory requirement and safety rules of the BYPL referred above, the latter shall be binding on the contractor unless the statutory provisions are more stringent.

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 17	Bidders seal & Signature
--	----------------------------	--------------------------

12 Penalty matrix for safety violations

Consequence Of Safety Violation Observed (Not related to incident / accident)		Violation				Subsequent violations	Action required
Sl No	Safety Violations	1st	2nd	3rd	4th		
1	Working without PPE	A	A	B	B	Will attract same penalty as applicable in 4th violation	Take risk reduction measure
2	Working without proper tools and tackles	A	B	B	C		
3	Working without creation of proper safety zone	B	B	C	D		
4	Improper supervision at worksite	B	C	D	E		
5	Working without PTW process	C	D	E			
							Intolerable
Legend	Action to be taken	Responsibility		Penalty Amount in Rs		The number violations are to be calculated cumulative on the contract period or on the annual basis (which ever is less).	
A	Warning Letter	Engineer incharge		NIL			
B	Levy of penalty	Engineer incharge		INR 2,000			
C	Memo to Contactor and levy of penalty	Circle Head		INR 4,000			
D	Momo to contractor and leavy of penalty	Head of Department		INR 10,000			
E	Memo to Contactor, levy of penalty and termination of contract	Head of Department		INR 100,000			

Fig 12(1) – Penalty Matrix for safety violation

The above figure (12 (1)) is the matrix of safety violation and the penal action to be taken against the contractor. Once the contractor reaches the "BLACK" (color – "5") category, i.e. highest level of safety violation, "Termination" notice to contractor will be issued from the office of the Head of Department (equivalent to AVP/ VP) and further, *if required*, continuation / extension of contract will only be initiated by Functional Head of the department (equivalent to VP/Sr VP level) and approved by CEO. Till the extension, the contract will remain suspended.

Safety violations resulting in incident / accident will be treated as per gravity of the injury / fatality and its impact as well as type i.e. minor or Major. Consequences of incident / accident are shown in the matrix (figure 12(2) for major and 12(3) for small) below. In case of any accident, findings and recommendations of Accident Enquiry Committee will be final and binding and will supersede the arbitration clause of GCC.

Consequence of an Incident/Accident (in case of MAJOR contract)		Incident/Accident				Action required
SI No	Safety Violations	1st	2nd	3rd	4th	
1	Slight injury (First Aid Case)	F (STRENGTHENING OF PROCESS)				Take risk reduction measure
2	Minor injury (No or Hospitalization less than 48 Hrs)	F	G	G	H	
3	Major injury (Bone injury or burn or Hospitalization more than 48 hrs)	G	G	H	I	
4	Single Fatality	J	K			Intolerable
5	Multiple fatalities (Two or more fatalities during one event)	K				
Legend	Action to be taken	Responsibility		Penalty Amount in Rs		The number violations are to be calculated cumulative on the contract period or on the annual basis (which ever is less).
F	Issue memo and levy of penalty	Engineer incharge		INR 5,000		
G	Issue memo and levy of penalty	Engineer incharge		INR 20,000		
H	Issue memo and levy of penalty	Circle Head		INR 50,000		
I	Issue memo and levy of penalty	Head of Department		INR 200,000		
J	Issue memo and levy of penalty	Head of Department		INR 500,000		
K	Issue memo, levy of penalty, termination of contract and black listing of contractor	Function Head		INR 1,000,000		

Fig 12(2) – Penalty Matrix for Incident/Accident in Major Contracts

Consequence of an Incident/Accident (in case of SMALL contract)		Incident/Accident				Action required
SI No	Safety Violations	1st	2nd	3rd	4th	
1	Slight injury (First Aid Case)	L (STRENGTHENING OF PROCESS)				Take risk reduction measure
2	Minor injury (No or Hospitalization less than 48 Hrs)	L	M	M	N	
3	Major injury (Bone injury or burn or Hospitalization more than 48 hrs)	M	M	N	O	
4	Single Fatality	P	Q			Intolerable
5	Multiple fatalities (Two or more fatalities during one event)	Q				
Legend	Action to be taken	Responsibility		Penalty Amount in Rs		The number violations are to be calculated
L	Issue memo and levy of penalty	Engineer incharge		INR 5,000		

M	Issue memo and levy of penalty	Engineer incharge	INR 10,000	cumulative on the contract period or on the anual basis (whichever is less).
N	Issue memo and levy of penalty	Circle Head	INR 25,000	
O	Issue memo and levy of penalty	Head of Department	INR 100,000	
P	Issue memo and levy of penalty	Head of Department	INR 200,000	
Q	Issue memo, levy of penalty, termination of contract and black listing of contractor	Function Head	INR 5,00,000	

Fig 12(3) – Penalty Matrix for Incident/Accident in small Contracts

In case of single or multiple fatalities described under legends J&K of fig 12(2) and P&Q of fig 12(3), the concerned contractor may be debarred from extension of contract or participate in new contract. In such event the approval of functional Head will be necessary for extension or award of new contract to concerned contractor.

ANNEXURE-I

Specification for Personal Protective Equipment

Safety Shoes – With Composite/Fiber toes (CE approved / IS 15298) – Mandatory for all personnel working at BYPL O&M. The safety shoes shall meet the following features:

1. Electric Shock Resistant Sole
2. Impact Resistant
3. Scrap/Heat Resistant
4. Slip Resistant
5. Oil and Acid Resistant

Lead MAKE: BATA/LIBERTY/Honeywell

Safety Helmets: (IS 2925 - 1984 or DGMS) with chin strap – Mandatory for all personnel working at BYPL O&M. The specification of safety helmet shall be as given below:

HDPE Yellow With 4 Point Fast Trac Ratchet Suspension

Shell Material	UV stabilise HDPE, Non vented
Suspension	<ul style="list-style-type: none"> • With 4 Point Fas Trac Ratchet Suspension sewn headband • Textile straps made from polyester Suspension • point fixing: good positioning, ...stability, better air circulation due to ...limited contact areas with the head • Easy clean sweatband
Size	52-62 cm
Accessory slot	Standard 30 mm with removable HDPE dead plugs suitable to leak proof fitting
Approvals	ANSI/ IEC Z89.1 Class E (electrical)
Additional	Low temperature -10°C (acc. to GB2811), High temperature +50°C
Colours	Yellow
weight	360 g

Lead MAKE: 3M / KARAM/Honeywell

Full Body positioning Harness: (CE approved / IS 3521 / EN 361 / EN 355) – Shall be used while work is in progress at height more than 1.8 meter or where from a person may fall and get injured. The specification of the Full body harness shall be as given below:

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 17	Bidders seal & Signature
--	----------------------------	--------------------------

Anchorage	Adjustable two chest attachment D-rings and A dorsal attachment D-ring
Adaptability	Adjustable shoulder and thigh straps
Convenience	Shoulder and thigh straps differentiated by a dual colour scheme.
Ergonomics	Idealy. Positioned sit strap for extended comfort.
Size	Standard
weight	1200GMS
ENERGY ABSORBING FORKED LANYARDS :	
Spec.	44mm wide polyamide webbing.
Length	1.5 Meter

Lead MAKE: KARAM /LIFEGEAR

Safety Spectacles

Shall be used to protect workers eyes from foreign materials and flying particles. Mandatory for all personnel working at BYPL O&M. Safety goggles shall meet the following feature

1. Poly carbonate/ Acetate lens for special applications requiring superior chemical resistance.
2. Industrial version of tough and popular first responder goggles.
3. SoftFlex low profile frosted frame for increased comfort.
4. Comfortable headband with length adjustment.
5. Indirect venting for comfortable, long lasting wear can be worn with safety helmets and over prescription spactacles.
6. Sightgard + premium anti-fog coating (EN 166 "N") with good anti- scratch properties.

Technical Specification:

Weight	95g.
Lens thickness	1.0mm
Overall width	173mm
Overall length	90mm
Bridge	47.6mm
Lens base	5.5 curve

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 17	Bidders seal & Signature
--	-----------------------------	--------------------------

Lens size	86.1mm verticle, 174mm diagonal
Headband	Adjustable length at max.440mm(long enough to fit together with helmets)
Material & colours	
Lens	Acetate clear, coating, Sightgard + anti-fog according to EN 166 "N" & anti scratch.
Body	PVC smoke
Headband holder	Nylone
Headband	Adustable grey elastic fixed on frame side parts
Marking / Approvals	
Standard number	EN 166
Frame marking	MSA EN 166 34-FT CE
Lens marking	2C-1.2 MSA 1 FT N CE
Filter class	2C (Ultra violet radiation with enhanced colour recognition)
Scale number	1.2: luminous trasmittance-89%
Optical class	1 (best class, for permanent wear)
Mechanical resistance	F (low energy impact 45m/s) T (at extreme temperature -5 to +55° C)
Resistance to	N(distorted vision due to lens fogging)
UV filter	99.9%
Ordering information	10145578-FlexiChem Sightgard + clear , 6x

Lead MAKE: MSA / UVEX/ 3M

Electrical Insulating Hand Gloves – Shall be used to prevent electric shock based upon the hazards/risks involved in a particular activity. Safety goggles shall meet the following feature

- Breakthrough manufacturing process delivers exception dry grip.
- Soft and flexible for enhanced tactility, high dexterity and wearer comfort.
- Ergonomic design featuring tapered fingers to reduce hand fatigue.
- Relaxed wrist for easy on/off.

Length	360mm
Class	2
Thickness	3.6mm
Proof test voltage	20000
Maximum use voltage	11000
Tensile strength	>16mpa[Mega Pascal]
Puncture resistance	>18N/mm [Newton per mili meter]
Elongation at break	>600% [Stretching length]
Tension set	<15%

It should be resist to oil, acid, ultra violet rays and very low temperature.
 Each pair of glove should be marked with class, category, month & year of manufacturing, CE logo, batch no. and certified laboratory no.
 EN certified to electrical and thermal hazards,
 EN certified to thermal & electrical hazards to confirm EN 60-903,
 EN certified to mechanical hazard to EN-388

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 17	Bidders seal & Signature
--	-----------------------------	--------------------------



Lead MAKE: Honeywell / ANSELL

CERTIFICATES REQUIRED:

1. Manufacturer Certificate
2. Test Certificate
3. Authorization of Dealership/Distributionship

Reflective Safety Jacket – Class -2 Safety Vest mandatory for all personnel working at BYPL O&M. Shall be used by the worker during the work.

Warning Tapes – HDPE or LDPE Made of 50 micron thick, non adhesive, width 75mm –Safety Logo embossed at every foot with white and red strips on both sides in Tubular form – Shall be used for barricading area around excavated pit to warn the personnel not to enter in such areas.

Road barricading cone with barricading tape – Shall be used by the worker during the operation / maintenance work.

Arc Protection Suit - shall be used by the worker for all HT/ EHV related works.

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 17	Bidders seal & Signature
--	-----------------------------	--------------------------

Annexure #2

**BSES YAMUNA POWER LIMITED
(Name of Site)**

Safety Appreciation / Violation Memo

DIVISION/Area: -----

Date & Time: -----

Name of Contractor: -----

Activity: -----

Name of Division Head: -----

Appreciation/Penalty Memo#:

S.N	Safety Violation Details	Class (A/B/C/D/E)	No. of Violations	Penalty per Violation (Rs)	Penalty Amount (Rs)	Remarks
1						
2						
3						
4						
5						

Safety Appreciation/Violation Note:

Recommended By: Name: ----- Designation: -----

Sign/Date: -----

Approved By (Division Head): Name: ----- Designation: -----

Sign/Date: -----

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 17	Bidders seal & Signature
--	-----------------------------	--------------------------

Annexure #3

**BSES YAMUNA POWER LIMITED
(Name of Site)**

Monthly Status of PPE's / Tool Kit

Location/Area: -----

Date & Time: -----

Name of Contractor: -----

No. AMC Employee:

Lineman:

ALM:

Status of PPE's

S.N	Name of PPEs / Tool	No. Of PPEs	Condition	Remarks
1	Safety Helmet			
2	Safety Goggle			
3	Electrical Insulating Hand gloves			
4	Full Body Harness			
5	Safety Shoes			
6	Reflective Jacket			

Signature / Date

Annexure #4

**BSES YAMUNA POWER LIMITED
(Name of Site)**

Monthly Status - Accident / Incident

Location/Area: -----

Date & Time: -----

Name of Contractor: -----

Table – 1: Summary of Accident /Incident / Near Miss / Dangerous Occurences / First Aid:

S.N	Type of Accident /Incident / Near Miss / Dangerous Occurences / First Aid	Person Injured	Brief Discription
1			
2			
3			
4			
5			

Table – 2: Learning from Incidents:

S.N	Brief Discription	Root Cause	Recommendation
1			
2			
3			
4			

5			
---	--	--	--

Table – 3: Summary of Person Injured:

S.N	Name of Employee	Emp. ID / Designation	Type of Injury	Duration of Medical Rest	
				From	To
1					
2					
3					
4					
5					

Table -4 : Safety Inspections / Violation

S. No.	Date	Location	Discrepancies	Compliance
1				
2				
3				
4				
5				

Table - 5 : Health & Safety Complaints & Sugesstions :

S. No.	Date	Location	Complaints / Sugestion
1			
2			
3			
4			
5			

Measures to avoid recourences for all above mentioned discrepancies (Attach relevant documents if required)

Signature / Date

CONTRACT HEALTH AND SAFETY PLAN NIT NO: CMC/BY/20-21/RB/SV/48	Page 16 of 17	Bidders seal & Signature
--	-----------------------------	--------------------------



Annexure #5

**BSES YAMUNA POWER LIMITED
(Name of Site)**

Format - PPE's Receipt by workers

Division:

Name of Contractor:

S. NO	NAME	DESI.	Safety Helmet	Electrical Insulating Hand gloves	Full Body Harness	Safety Shoes	Safety Goggle	Reflective Jacket	SIGNATURE

Signature of Contractor / Date.....

APPENDIX II

(To be executed on a Non-Judicial Stamp Paper of appropriate value)

FORMAT OF ADVANCE BANK GUARANTEE

This Guarantee made at _____ this [____] day of [____] 20XX

1. WHEREAS M/s BSES Yamuna Power Limited, a Company incorporated under the provisions of Companies Act, 1956 having its Registered Office at Shaktikiran Building, Karkardooma, Delhi 110032, India hereinafter referred to as the " Owner ", (which expression shall unless repugnant to the context or meaning thereof include its successors, administrators, executors and assigns).
2. AND WHEREAS the Owner has entered into a contract for _____(Please specify the nature of contract here) vide Contract No. _____dated _____(hereinafter referred to as the "Contract") with M/s._____, (hereinafter referred to as "the Suppliers", which expression shall unless repugnant to the context or meaning thereof be deemed to mean and include each of their respective successors and assigns) for providing of the services on the terms and conditions as more particularly detailed therein.
3. AND WHEREAS in conformity with the provisions of clause _____ of conditions of Contract, the Suppliers has agreed to furnish a Bank Guarantee for an amount equivalent to the Advance Payment of Rs..... extended by the Owner to the Supplier for the faithful execution of the Contract.
4. AND WHEREAS the Suppliers have agreed to provide the Owner and the Owner has agreed to accept the Advance Bank Guarantee for ____ percent (____%) of the total Contract Value from [_____] (*pl. specify the name of Bank*) having its head/registered office at [_____] through its branch in _____(*pl. specify the name of Branch through which B.G is issued*) hereinafter referred to as "the Bank", (which expression

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 1 of 12	Bidders seal & Signature
--	--------------	--------------------------

shall unless it be repugnant to the context or meaning thereof be deemed to include its successors and permitted assigns).

5. NOW THEREFORE, in consideration inter alia of the Owner granting the Suppliers the Contract, the Bank hereby unconditionally and irrevocably guarantees and undertakes, on a written demand, to immediately pay to the Owner any amount so demanded (by way of one or more claims) not exceeding in the aggregate [Rs.].....) *in words*) without any demur, reservation, contest or protest and/or without reference to the Supplier and without the Owner needing to provide or show to the Bank ,grounds or reasons or give any justification for such demand for the sum/s demanded.
6. The decision of the Owner as to whether the Supplier has fulfilled its obligation or not towards set-off of Advance Payment extended by the Owner to the Supplier shall be final and binding on the Bank and the Supplier. The Bank acknowledges that any such demand by the Owner of the amounts payable by the Bank to the Owner shall be final, binding and conclusive evidence in respect of the amounts payable by the Supplier to the Owner. Any such demand made by the Owner on the Bank shall be conclusive and binding, notwithstanding any difference between the Owner and the Supplier or any dispute raised, invoked, threatened or pending before any court, tribunal, arbitrator or any other authority.
7. The Bank also agrees that the Owner at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor without proceeding against the Suppliers notwithstanding any other security or other guarantee that the Owner may have in relation to the Supplier's liabilities.
8. The Bank hereby waives the necessity for the Owner first demanding the aforesaid amounts or any part thereof from the Suppliers before making payment to the Owner and further also waives any right the Bank may have of first requiring the Owner to use its legal remedies against the Suppliers, before presenting any written demand to the Bank for payment under this Guarantee.

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 2 of 12	Bidders seal & Signature
--	----------------------------	--------------------------

9. The Bank's obligations under this Guarantee shall not be reduced by reason of any partial performance of the Contract. The Bank's obligations shall not be reduced by any failure by the Owner to timely pay or perform any of its obligations under the Contract.
10. The Bank further unconditionally and unequivocally agrees with the Owner that the Owner shall be at liberty, without the Bank's consent and without affecting in any manner its rights and the Bank's obligation under this Guarantee, from time to time, to:
- (i) vary and/or modify any of the terms and conditions of the Contract;
 - (ii) forebear or enforce any of the rights exercisable by the Owner against the Suppliers under the terms and conditions of the Contract; or
- and the Bank shall not be relieved from its liability by reason of any such act or omission on the part of the Owner or any indulgence shown by the Owner to the Suppliers or any other reason whatsoever which under the law relating to sureties would, but for this provision, have the effect of relieving the Bank of its obligations under this Guarantee.
11. This Guarantee shall not be discharged by any change in the constitution or composition of the Suppliers, and this Guarantee shall not be affected or discharged by the liquidation, winding-up, bankruptcy, reorganisation, dissolution or insolvency of the Suppliers or any of them or any other circumstances whatsoever.
12. This Guarantee shall be in addition to and not in substitution or in derogation of any other security held by the Owner to secure the obligations of the Suppliers under the Contract.
13. NOTWITHSTANDING anything herein above contained, the liability of the BANK under this Guarantee shall be restricted to _____ (*insert an amount equal to ten percent (10%) of the Contract Value*) and this Guarantee shall be valid and enforceable and expire on _____ (*pl. specify date*) or unless a suit or action to enforce a claim under this Guarantee is filed against the Bank on or before the date of expiry.
14. On termination of this Guarantee, all rights under the said Guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities hereunder.

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 12	Bidders seal & Signature
--	----------------------------	--------------------------

15. The Bank undertakes not to revoke this Guarantee during its validity except with the prior written consent of the Owner and agrees that any change in the constitution of the Bank or the Suppliers shall not discharge our liability hereunder.

16. Owner may assign this Guarantee to any Person or body whether natural, incorporated or otherwise under intimation to the Bank. The Bank shall be discharged of its obligations hereunder by performance in accordance with the terms hereof to such assignee without verifying the validity / legality / enforceability of the assignment.

17. This Guarantee shall be governed by the laws of India. Any suit, action, or other proceeding arising out of, connected with, or related to this Guarantee or the subject matter hereof shall be subject to the exclusive jurisdiction of the courts of **Delhi**, India.

Dated this day of 20XX at

(Signature)

.....

(Name)

.....

(Designation with Bank Stamp)

Attorney as per

Power of Attorney No.....

Date.....

(To be executed on a Non-Judicial Stamp Paper of appropriate value)

FORMAT OF PERFORMANCE BANK GUARANTEE

This Guarantee made at _____ this [____] day of [____] 20XX

1. WHEREAS M/s BSES Yamuna Power Limited, a Company incorporated under the provisions of Companies Act, 1956 having its Registered Office at Shaktikiran Building, Karkardooma, Delhi 110032, India hereinafter referred to as the " Owner ", (which expression shall unless repugnant to the context or meaning thereof include its successors, administrators, executors and assigns).
2. AND WHEREAS the Owner has entered into a contract for _____(Please specify the nature of contract here) vide Contract No. _____dated _____(hereinafter referred to as the "Contract") with M/s._____, (hereinafter referred to as "the Supplier", which expression shall unless repugnant to the context or meaning thereof be deemed to mean and include each of their respective successors and assigns) for providing services on the terms and conditions as more particularly detailed therein.
3. AND WHEREAS as per clause ____of conditions of Contract, the Suppliers are obliged to provide to the Owners an unconditional bank guarantee for an amount equivalent to ten percent (10%) of the total Contract Value for the timely completion and faithful and successful execution of the Contract from [_____] *pl. specify the name of Bank*) having its head/registered office at [_____] through its branch in _____(*pl. specify the name of Branch through which B.G is issued*) hereinafter referred to as "the Bank", (which expression shall unless it be repugnant to the context or meaning thereof be deemed to include its successors and permitted assigns).
4. NOW THEREFORE, in consideration inter alia of the Owner granting the Suppliers the Contract, the Bank hereby unconditionally and irrevocably guarantees and undertakes, on a written demand, to immediately pay to the Owner any amount so demanded (by way

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 5 of 12	Bidders seal & Signature
--	--------------	--------------------------

of one or more claims) not exceeding in the aggregate [Rs.].....(*in words*) without any demur, reservation, contest or protest and/or without reference to the Supplier and without the Owner needing to provide or show to the Bank ,grounds or reasons or give any justification for such demand for the sum/s demanded.

5. The decision of the Owner to invoke this Guarantee and as to whether the Supplier has not performed its obligations under the Contract shall be binding on the Bank. The Bank acknowledges that any such demand by the Owner of the amounts payable by the Bank to the Owner shall be final, binding and conclusive evidence in respect of the amounts payable by the Supplier to the Owner. Any such demand made by the Owner on the Bank shall be conclusive and binding, notwithstanding any difference between the Owner and the Supplier or any dispute raised, invoked, threatened or pending before any court, tribunal, arbitrator or any other authority.
6. The Bank also agrees that the Owner at its option shall be entitled to enforce this Guarantee against the Bank as a principal debtor without proceeding against the Suppliers notwithstanding any other security or other guarantee that the Owner may have in relation to the Supplier's liabilities.
7. The Bank hereby waives the necessity for the Owner first demanding the aforesaid amounts or any part thereof from the Suppliers before making payment to the Owner and further also waives any right the Bank may have of first requiring the Owner to use its legal remedies against the Suppliers, before presenting any written demand to the Bank for payment under this Guarantee.
8. The Bank's obligations under this Guarantee shall not be reduced by reason of any partial performance of the Contract. The Bank's obligations shall not be reduced by any failure by the Owner to timely pay or perform any of its obligations under the Contract.
9. The Bank further unconditionally and unequivocally agrees with the Owner that the Owner shall be at liberty, without the Bank's consent and without affecting in any manner its rights and the Bank's obligation under this Guarantee, from time to time, to:

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 12	Bidders seal & Signature
--	----------------------------	--------------------------

- (i) vary and/or modify any of the terms and conditions of the Contract;
- (ii) Forebear or enforce any of the rights exercisable by the Owner against the Suppliers under the terms and conditions of the Contract; or
- (iii) Extend and/or postpone the time for performance of the obligations of the Suppliers under the Contract;

and the Bank shall not be relieved from its liability by reason of any such act or omission on the part of the Owner or any indulgence shown by the Owner to the Suppliers or any other reason whatsoever which under the law relating to sureties would, but for this provision, have the effect of relieving the Bank of its obligations under this Guarantee.

- 10. This Guarantee shall be a continuing bank guarantee and shall not be discharged by any change in the constitution or composition of the Suppliers, and this Guarantee shall not be affected or discharged by the liquidation, winding-up, bankruptcy, reorganisation, dissolution or insolvency of the Suppliers or any of them or any other circumstances whatsoever.
- 11. This Guarantee shall be in addition to and not in substitution or in derogation of any other security held by the Owner to secure the performance of the obligations of the Suppliers under the Contract.
- 12. NOTWITHSTANDING anything herein above contained, the liability of the BANK under this Guarantee shall be restricted to _____ (*insert an amount equal to ten percent (10%) of the Contract Value*) and this Guarantee shall be valid and enforceable and expire on _____ (*pl. specify date*) or unless a suit or action to enforce a claim under this Guarantee is filed against the Bank on or before the date of expiry.
- 13. On termination of this Guarantee, all rights under the said Guarantee shall be forfeited and the Bank shall be relieved and discharged from all liabilities hereunder.

14. The Bank undertakes not to revoke this Guarantee during its validity except with the prior written consent of the Owner and agrees that any change in the constitution of the Bank or the Suppliers shall not discharge our liability hereunder.

15. Owner may assign this Guarantee to any Person or body whether natural, incorporated or otherwise under intimation to the Bank. The Bank shall be discharged of its obligations hereunder by performance in accordance with the terms hereof to such assignee without verifying the validity / legality / enforceability of the assignment.

16. This Guarantee shall be governed by the laws of India. Any suit, action, or other proceeding arising out of, connected with, or related to this Guarantee or the subject matter hereof shall be subject to the exclusive jurisdiction of the courts of **Delhi**, India.

Dated this day of 20XX at

(Signature)

.....

(Name)

.....

(Designation with Bank Stamp)

Attorney as per

Power of Attorney No.....

Date.....



BENEFICIARY'S BANK DETAIL WITH IFSC CODE:

1. Name of the Bank: Axis Bank Limited
2. Branch Name & Full Address: C-58, Basement & Ground Floor, Preet Vihar, Main Vikas Marg,
New Delhi 110092
3. Branch Code: 055
4. Bank Account No: 911020005246583
5. IFSC Code: UTIB0000055

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 12	Bidders seal & Signature
--	----------------------------	--------------------------



FORMAT OF WARRANTY/GUARANTEE CERTIFICATE

BSES YAMUNA POWER LIMITED Shaktikiran Building, Karkardooma, Delhi -110032.

Ref. Purchase Order No. :

Dear Sir,

We hereby confirm that the.....dispatched to BSES YAMUNA POWER LTD vide invoice no..... DT.....is exactly of the same nature and description as per above mentioned Purchase Order.

We further confirm that we will replace/repair our.....free of cost If found any manufacturing defect during.....months from the date of dispatch of material or.....months from the data of commissioning whichever is earlier.

Vendors Name & Signature

FORMAT OF WARRANTY / DEFECT LIABILITY PERIOD –SERVICE

Performance requirements of the works completed is as per detailed specifications and standards specified and to be adhered to strictly. In-case of deficiency, the same is to be rectified / redone to meet the specifications by the contractor within stipulated schedule or any extension thereof. The Contractor shall be liable to rectify all defects except those arising out of normal wear and tear, in the works done by the Contractor under this contract, or from any act or omission of the contractors for a period of 24 months will depend on individual contract period package to package from the date of Handing over the works to the Employer / Owner.

Vendors Name & Signature

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 12	Bidders seal & Signature
--	-----------------------------	--------------------------

FORMAT OF NO DEMAND CERTIFICATE

NO DEMAND CERTIFICATE BY CONTRACTOR
(To be issued on letterhead of Contractor)

To ,

BSES YAMUNA POWER LIMITED,
Shaktikiran Building, Karkardooma,
Delhi -110032.

Name of the Project:

Contract No.:

Date of Contract:

Name of the Contractor:

We, M/s _____(Contractor) do hereby acknowledge and confirm that we have claimed Rs. _____ (Rs. _____) towards

full and final settlement of our claims from BSES Yamuna Power Limited, in respect of the aforesaid WO/PO/Contract No.: #####. Dated. ####. including all amendments, if any, to the said Contract, to our entire satisfaction and we further confirm that we have no claim whatsoever pending with BSES Yamuna Power Limited under or in respect of the said Contract.

Notwithstanding any protest, note or objection recorded or raised by us in any correspondence, documents, measurement books and / or final bills etc.

- (a) we confirm that BSES Yamuna Power Limited stands fully discharged of all its obligations,
(b) we shall make no claim of any nature on BSES Yamuna Power Limited or any of its affiliates or personnel, and
(c) we waive all our rights to lodge any claim or protest in future, in respect of the said Contract.

We have paid in full all applicable duties, levies, taxes and statutory and other amounts payable by us in connection with the above-mentioned Contract and amounts payable to or in relation to third parties engaged by us including our contractors, suppliers, employees and labour. No payment in this regard is pending or unpaid and we have no (and shall have no) claim against BSES Yamuna Power Limited in this regard.

No refund has been received/ is envisaged to be received or reasonably believed to be receivable on account of taxes, duties or any other payment made by us in respect of the Contract. In case any refund corresponding to any amount paid or reimbursed by BSES Yamuna Power Limited is received in the future, the same will be passed on to BSES Yamuna Power Limited promptly and without any demand from them in this regard.

We are issuing this "NO DEMAND CERTIFICATE" in favor of BSES Yamuna Power Limited with full knowledge of its contents and with our free consent without any influence, misrepresentation, coercion etc.

Date:

Place:

Signature:

Name:

Designation:

(Company Seal)

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 11 of 12	Bidders seal & Signature
--	-----------------------------	--------------------------

FORMAT FOR LETTER OF INDEMNITY

Format for Letter of Indemnity

(Notes: Preferably shall be obtained on Stamp paper of appropriate value as applicable at the place of execution, if not, then at least on the letterhead of the Contractor)

Place: _____

Date: _____

To,

BSES Yamuna Power Limited, Shaktikiran Building, Karkardooma, Delhi -110032.

Dear Sirs,

WO/PO/Contract No. _____ Dated ___/___/___

For _____

Settlement of Dues

In consideration of your awarding the subject Work Order/Purchase Order/Contract to us and in further consideration of your having agreed to pay our final bill towards settlement of the dues in respect of the subject Work Order/Purchase Order/Contract, inter alia, on our assurances and representations that :

(a) We have paid in full all amounts payable by us including but not limited to duties, levies, taxes, cess, octroi, royalties, statutory payments, amounts payable to or in relation to third parties engaged by us including our contractors, suppliers, employees and labour, and

(b) we have fully complied with all requirements under applicable laws in connection with the subject Purchase Order/Work Order/Contract,

We _____,

unconditionally and irrevocably agree and undertake, to pay and/or settle entirely at our own cost and indemnify, defend and hold harmless you, your affiliates and your/your affiliates' personnel, directors and representatives, (hereinafter collectively referred to as "Indemnified Parties") from and against any and all liabilities, judgments, damages, losses, claims, costs and expenses, claimed, suffered or incurred or, likely to be claimed, suffered or incurred at any time by or against the Indemnified Parties or any of them as a result of, or arising out of, or in any way related to any failure or delay in payment of any of the amounts or compliances by us as aforesaid for any reason whatsoever.

Any notice(s) or communication(s) by you shall be sufficient proof that the Indemnified Parties have suffered or incurred loss, damages, liabilities etc. as aforesaid and we shall upon receipt of such notice(s) or communication(s) immediately, without any delay or demur or contest, make payment to you of the entire amount demanded under the said notice(s) or communication(s).

This letter of indemnity shall be in addition to and not in derogation of any other indemnity/ guarantee and/or security which we may have executed in your favor or your rights and entitlements under the contract.

This letter shall be governed by and construed and interpreted to accordance with the laws of India, and shall be subject to the exclusive jurisdiction of the courts of law at Mumbai.

Yours faithfully,

For M/s _____

Authorized Signatory

APPENDIX II NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 12	Bidders seal & Signature
--	-----------------------------	--------------------------

PRICE BID FORMATS (SUPPLY & SERVICES)

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 1 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

GRAND SUMMARY OF THE QUOTED PACKAGE(S)

ALL PRICES IN INR (₹)

Package Name/Description	Supply Prices-Landed (A)	Erection, Testing and commissioning prices - Landed (B)
SCHEME NO: EE20SH1009 PROJECT – PART CONVERSION OF 66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING OF 66 KV 1x1000 SQ MM XLPE CABLE FOR BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA GRID CKT 1 & 2		
Grand Total [A+B]		
Grand Total (In words)		

We declare that the following are our quoted prices in INR for the entire packages.

Date: _____ Bidders Name: _____
 Place: _____ Bidders Address: _____
 Signature: Designation:
 Printed Name: Common Seal:

Note:

- 1) All prices for the packages quoted are inclusive of taxes and duties, GST and freight etc. Bidder shall include & indicate any others taxes under the applicable law(s) for supply and services to be performed in the purchaser's country.
- 2) Bidder shall include & indicate any others taxes under the applicable law(s) for supply and services to be performed in the purchaser's country.
- 3) The bidder shall, at its own, handle all imported equipment's and handle all formalities for custom clearances, port charges, etc if any

- 4) All prices for the packages quoted are against the scope of work under the contract shall be executed strictly as per the NIT conditions and the technical specification.
- 5) Quoted prices shall be as per the Bill of quantities (BOQ) as attached. However Any items/material/machinery, not specifically mentioned In BOQ as well as in the technical specifications but required for successful completeness, Erection, Testing and Commissioning of the package awarded shall be deemed to be in the scope of the bidder.
- 6) Insurance as per the clause defined in SCC and other contract conditions, is included in the quoted prices. However Bidder shall indicate the value of the insurance taken, separately.
- 7) Site visit is advisable prior to submission of quotation.

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 3 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

PRICE FORMAT – SUPPLY (A) (Kindly refer detailed package wise SCOPE OF SUPPLY attached as Volume II for Indicative Description of Goods/BOM, BOQ)

S. No.	DESCRIPTION OF GOODS	HSN CODE (8 Digit Mandatory)	UoM	QTY (A)	UNIT BASIC PRICE (₹) (B)	UNIT GST & CESS AS APPLICABLE (CGST & SGST/UTGST or IGST) (₹) (C)		UNIT LANDED COST (₹) (D = B+C)	TOTAL LANDED COST (₹) (E = DXA)
						%	AMT		
1	Cable ARM XLPE 66 kV 1Cx1000 sq mm AL		Meter	6000					
2	Cable straight through joint kit Suitable for 66 kV 1Cx1000 sq mm cable (Make-Raychem/ 3M)		No's	18					
3	Cable End Termination kit outdoor Suitable for 66 kV 1Cx1000 sq mm cable (Make-Raychem/ 3M)		No's	12					
4	Lightening arrestor 60 kV 10 kA		No's	12					
5	Precast RCC (1:2:4) cable cover 600x550x50 mm		No's	2667					
6	HDPE PIPE 200 MM Dia PN4 PE 80		Meter	1200					
7	HDPE PIPE 200 MM Dia PN6 PE 80		Meter	100					
8	Weather and acid resistant PVC warning tape of 150mm width 300 micron thick Yellow colour with desired Red/Black lettering		Meter	1600					
9	Route indicating stone at every 50 meter circuit length		No's	20					
10	Joint indicating stones at every cable joint location		No's	18					

11	Galvanized Channel, Angle, Beam and other Structural steel with hardwares, MS Reinforcement steel bars for all structures including cable support Structure	MT	10					
12	MS Rail Pole 110 Lbs 42 Feet	No's	8					
13	Sand	Cum	369					
14	Single Phase link box with SVL MCOV 5.1 kV	No's	18					
15	Single Phase link box without SVL	No's	18					
16	Three Phase link box with SVL MCOV 5.1 kV	No's	4					
17	Earth bonding cable Cu 6.35 kV 1X240 sq mm	Meter	250					
18	RCC chamber for Three Phase link box	No's	4					
19	Copper bonded Earth electrodes 3 meter length with earthing enhancement compound as per BYPL Earthing specification SP-GES-107-R0	No's	24					
20	HDPE cleat with hardware's suitable for 66 kV 1Cx1000 sq mm cable	No's	24					
21	Support insulators for mounting of cable on support structure	No's	12					
22	Danger Plates	No's	12					
23	Circuit Name Plate	No's	12					
24	Anti Climbing device	No's	4					

25	50X6 Sq mm GI Earthing strip		MT	1					
26	Aluminium Cable Identification tag with nylon string		No's	120					
27	Safety barricading PVC tape		M	1					
28	Safety barricading cone		No's	1					
29	RFID based electronic buried type cable route marker for cable joints and turns having facility to feed the joint/turn related information		No's	18					
30	Receiver unit for electronic cable route marker cum cable route tracer suitable with offline as well as online cable route tracing functionality		No's	1					
31	Galvanized Nuts and Bolts		Kg	1					
32	Burnt clay Brick - First class		No's	1					
33	Cement Bags 50 kg		No's	1					
34	Construction Aggregate 12 mm		Cum	1					

GRAND TOTAL LANDED COST (₹)

In words

Note: All quantities mentioned above are estimated quantities. Actual quantities may vary as per actual site requirement.

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 6 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

PRICE FORMAT – E/T/C (B) (Kindly refer detailed package wise SCOPE OF WORK attached as Volume II for Indicative Description of Services/BOM, BOQ)

S. No.	DESCRIPTION OF SERVICES	SAC CODE	UoM	QTY (A)	UNIT BASIC PRICE (₹) (B)	UNIT GST & CESS AS APPLICABLE (CGST & SGST/UTGST or IGST) (₹) (C)		UNIT LANDED COST (₹) (D = B+C)	TOTAL LANDED COST (₹) (E = DXA)
						%	AMT		
1	Surveying of cable Route, Detailed Site Plan & Profile using Ground penetration Radar System, Excavation of trial pits as per field requirement, preparation of route drawing with location of joint chambers position and finalizing the cable route in consultation with BSES Representative		Meter	1000					
2	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Ordinary Bituminous/C.C.Road (including dewatering if any)		Cum	739					
3	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Dense Carpeted bituminous Road (including dewatering if any)		Cum	134					
4	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Footpath/tile/Rajasthani Stone/Brick work (including dewatering if any)		Cum	134					
5	Digging of cable trench as per specification and drawings. Rate is		Cum	67					

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 7 of 14	Bidders seal & Signature
--	--------------	--------------------------

	inclusive of digging and backfilling for Hard Rocky Soil (including dewatering if any)								
6	Laying of XLPE cables in the excavated trench, as per BYPL Standards (Regarding Depth, Layer formation, etc). Cable rollers to be used during Laying.	Meter	4500						
7	Laying of XLPE cable in HDPE Pipe in Excavated Trench	Meter	300						
8	Laying of cable in trenchless ducts including laying of cable and HDPE pipe using HDD machine including laying of 200 mm dia HDPE pipe PN4 PE 80 Class	Meter	1200						
9	Continuous steel Barricade for all Excavated areas, till the work is completed.	Meter	1000						
10	Dismantling of the existing 66KV D/C OH Line and Towers, (Approx Line length of 1.0KM's) and handing over the dismantled Material to BYPL Stores	Lot	1						
11	Fixing of Aluminum Cable identification tags with Nylon string at every 30 Mtrs cable length	No's	120						
12	Installation of straight through joints for 66 kv 1Cx1000 sq mm cables by jointing kit OEM authorized jointer	No's	18						
13	Installation of End Termination for 66kv 1Cx1000 sq mm cables by jointing kit OEM authorized jointer	No's	12						
14	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Ordinary bituminous road/C.C. Road	No's	12						

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 8 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

15	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Dense carpeted bituminous road.		No's	2					
16	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Footpath/ tile/ Rajasthani Stone / Brick Works		No's	2					
17	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Hard Rocky Soil.		No's	2					
18	Spreading of sand forming cushion and cover around the cable		Cum	369					
19	Disposal of debris/surplus malba including Loading / Unloading		Cum	406					
20	Watch and ward of complete circuit till project handover		Lot	1					
21	Installation of Precast RCC Cable cover		No's	2667					
22	Installation of Route and Joint indicating stone marked with "BYPL 66 KV Cable Helpline No-91-11-4124 9808"		No's	38					
23	Laying of PVC warning tape		Meter	1600					
24	Fabrication and installation of Galvanized Channel, Angle, Beam and other Structural steel with hardwares, MS Reinforcement steel bars for all structures including cable support Structure		MT	10					

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 9 of 14	Bidders seal & Signature
--	----------------------------	--------------------------

25	Erection of 66 kV Lightning Arrestors Including supply of T & P, all consumable items such as welding rods, hacksaw blades etc and modification in support structure for fixing as required.	No's	12					
26	Erection of 110 Lbs 42 Feet Rail Pole including digging , refilling, ramming of the foundation and including removal of malba ,grouting with cement concrete mortar to 16 cft. of 1:3:6 ratios (1 cement, 3 Badarpur, 6 Stone blast-Cement,Sand and Mortar).Painting of Rail with one coat of primer & two coat of Al paint Including brick padding.	No's	8					
27	Mounting of existing cable with end termination on new Gantry structure using HDPE cleat.	No's	12					
28	Jumpering between existing cable terminations to new cable termination with hardwares, ACSR conductors i/c.sagging and jumpering complete for 6Nos.Conductors with one earth wire.	No's	4					
29	Hi Voltage DC testing for 66 kV cable on complete cable length	Lot	1					
30	VLF High voltage test on complete cable length as per relevant IEC/IEEE	Lot	1					
31	Partial discharge test on complete cable length at site	Lot	1					
32	Tan Delta test on complete cable length at site	Lot	1					

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 10 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

33	Installation of Single Phase link box with SVL including cable earthing/armour connection with grid earthing		No's	18					
34	Installation of Single Phase link box without SVL including cable earthing/armour connection with grid earthing		No's	18					
35	Installation of Three Phase link box with SVL including cable earthing/armour connection with grid earthing		No's	4					
36	Installation of RCC chamber for Three Phase link box		No's	4					
37	Installation, mounting and fixing of 66 kV 1Cx1000 sq mm cable with termination on mounting structure/tower and fixing it with suitable HDPE cleats		No's	24					
38	Installation of support insulators on cable mounting structure with misc. hardware's.		No's	12					
39	Fixing of danger plate on poles including fabrication of clamps etc		No's	12					
40	Fixing of circuit Name plate including fabrication of clamps etc		No's	12					
41	Fixing of anti climbing device on cables mounting structures including fabrication of clamps etc		No's	4					
42	Transportation of empty 66 kV cable drums from site to BSES store		No's	12					
43	Laying of GI earth connecting strip of 50x6 sq mm size including required welding, painting on joints etc		MT	1					

44	Erection of earthing electrodes with earth enhancement compound and interconnection with equipment including nut-bolts, welding, paint work on welding as per BYPL earthing specification SP-GES-107-R0		No's	24					
45	Making of civil goomitties around earthing electrode as per standard design of BSES including supply of necessary bricks, cement, badarpur, sand, cover of size 1'x1' and providing the same at the top of goomitties.		No's	24					
46	Submission of actual laid drawing of cable circuits including GPS coordinates of all joint in cables circuits		Lot	1					
47	Cable Phasing work, Cable Phase Sequence (R,Y,B) Marking, Cable circuit number Marking, and final connection as per Phase Sequence.		Lot	1					
48	Masonry Brick work with 1 cement : 6 coarse sand		Cum	1					
49	Masonry Brick flooring work with 1 cement : 6 coarse sand		Sq meter	1					
50	15 mm cement plaster on rough side of brick wall of mix 1:4 (1 cement : 4 fine sand)		Sq meter	1					
51	Providing and laying in position cement concrete 1:1.5:3 (1 cement :1.5 coarse sand : 3 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement		Cum	1					

PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 12 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

52	Providing and laying in position cement concrete 1:2:4 (1 cement :2 coarse sand : 4 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement	Cum	1					
53	Providing and laying in position cement concrete 1:4:8 (1 cement :4 coarse sand : 8 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement	Cum	1					
54	Supply & Spreading of blue stone aggregate 20 mm uniformly in yard of grid s/stn i/c/ Gantry, loading, unloading as per site requirement	Cum	1					
55	Centering, shuttering including shuttering propping etc and removal of shuttering	Cum	1					
56	Fabrication of reinforcement for RCC work including straightening, cutting, bending, placing in position and binding all complete thermo mechanically treated bars.	Cum	1					
57	Installation of Brick as Cable Separator	No's	1					
58	Supply and fixing of wire mesh fencing 2.5 mtr height with gate frame of 3 mtr x 2.5 mtr with complete material including painting eg angle,chain link,wire mesh and civil material etc complete as per specification & drawing of BSES.Angle iron size 50x50x6 mm & MS strip 50 x 3 mm,Wire mesh 1"x3" of	Sq meter	1					


PRICE BID NIT NO: CMC/BY/20-21/RB/SV/48	Page 13 of 14	Bidders seal & Signature
--	-----------------------------	--------------------------

	8 SWG wire to be used for wire-mesh with providing support at 1.25m distance.								
59	ETC of RFID Marker		No's	18					
GRAND TOTAL LANDED COST (₹)									
In words									
Note: All the Testing's shall be witnessed by BYPL. All the Site Test Reports should be submitted, before charging of the Cables.									

VOLUME – II

SCOPE OF TURNKEY EXECUTION

**SCOPE OF WORK
FOR
PART CONVERSION OF
66 KV D/C OVERHEAD LINE TO UNDERGROUND CABLES
INCLUDING SUPPLY, LAYING, TESTING AND COMMISSIONING
OF
66 KV 1x1000 SQ MM XLPE CABLE FOR
BYPL KHICHIRIPUR GRID TO BYPL PATPARGANJ IND AREA
GRID CKT 1 & 2**

Revision - 0	No. of Page – 12	Date – 03 March 2021
	Prepared by	Signature
Prepared by	Abhishek Vashistha	<i>Abhishek Vashistha</i> 7a74fd4f-a398-49df-bd05-e398d5a949f0
Reviewed by	Puneet Duggal	<i>Puneet Duggal</i> 404db803-a91f-4234-85f0-0b2b5098ec32
	Manoj Vidyarthi	<i>Manoj Vidyarthi</i> 482e4648-110f-4dbf-9528-b52a523b0db5
Approved by	Gaurav Sharma	 23dc2de2-95de-4472-99a7-dea873f472b6
	Resham Singh	Resham Singh b7dce781-1162-4f70-aeae-c91e4e3b98d9

CONTENTS

1. SCOPE	3
2. SCOPE OF SUPPLY	3
3. SCOPE OF WORK	5
4. DOCUMENT SUBMISSION MATRIX	9
5. SCOPE DEMARCATION	10

1. SCOPE

- 1.1. Scope covers part conversion of 66 KV overhead line to Underground cables of Khichripur Grid to Patparganj Industrial Area Grid Ckt 1 & 2
- 1.2. Scope also covers dismantling of existing EHV line and it's transportation to BYPL stores.
- 1.3. Circuit lengths considered under present scope of work is as following
 - a. Total Circuit Length - 4000 meter (approx.)
 - b. Circuit length to be converted from overhead to Underground – 1000 meter
- 1.4. Each circuit will have 3 no's cable runs. Therefore total 6 no's cable runs will be laid.

2. SCOPE OF SUPPLY

S No	Material Description	UoM	Quantity
1	Cable ARM XLPE 66 kV 1Cx1000 sq mm AL	Meter	6000
2	Cable straight through joint kit Suitable for 66 kV 1Cx1000 sq mm cable (Make- Raychem/ 3M)	No's	18
3	Cable End Termination kit outdoor Suitable for 66 kV 1Cx1000 sq mm cable (Make- Raychem/ 3M)	No's	12
4	Lightening arrester 60 kV 10 kA	No's	12
5	Precast RCC (1:2:4) cable cover 600x550x50 mm	No's	2667
6	HDPE PIPE 200 MM Dia PN4 PE 80	Meter	1200
7	HDPE PIPE 200 MM Dia PN6 PE 80	Meter	100
8	Weather and acid resistant PVC warning tape of 150mm width 300 micron thick Yellow colour with desired Red/Black lettering	Meter	1600
9	Route indicating stone at every 50 meter circuit length and Joint indicating stones at every cable joint location	No's	38
10	Galvanized Channel, Angle, Beam and other Structural steel with hardwares, MS Reinforcement steel bars for all structures including cable support Structure	MT	10
11	MS Rail Pole 110 Lbs 42 Feet	No's	8
12	Sand	Cum	369
13	Single Phase link box with SVL MCOV 5.1 kV	No's	18
14	Single Phase link box without SVL	No's	18
15	Three Phase link box with SVL MCOV 5.1 kV	No's	4

S No	Material Description	UoM	Quantity
16	Earth bonding cable Cu 6.35 kV 1X240 sq mm	Meter	250
17	RCC chamber for Three Phase link box	No's	4
18	Copper bonded Earth electrodes 3 meter length with earthing enhancement compound as per BYPL Earthing specification SP-GES-107-R0	No's	24
19	HDPE cleat with hardware's suitable for 66 kV 1Cx1000 sq mm cable	No's	24
20	Support insulators for mounting of cable on support structure	No's	12
21	Danger Plates	No's	12
22	Circuit Name Plate	No's	12
23	Anti Climbing device	No's	4
24	50X6 Sq mm GI Earthing strip	MT	1
25	Aluminium Cable Identification tag with nylon string	No's	120
26	Safety barricading PVC tape	Lot	1
27	Safety barricading cone	Lot	1
28	RFID based electronic buried type cable route marker for cable joints and turns having facility to feed the joint/turn related information	No's	18
29	Receiver unit for electronic cable route marker cum cable route tracer suitable with offline as well as online cable route tracing functionality	No's	1
30	Galvanized Nuts and Bolts	Kg	1
31	Burnt clay Brick - First class	No's	1
32	Cement Bags 50 kg	No's	1
33	Construction Aggregate 12 mm	Cum	1

Note: All quantities mentioned above are estimated quantities. Actual quantities may vary as per actual site requirement.

3. SCOPE OF WORK

S No	Work Description	UoM	Quantity
1	Surveying of cable Route, Detailed Site Plan & Profile using Ground penetration Radar System, Excavation of trial pits as per field requirement, preparation of route drawing with location of joint chambers position and finalizing the cable route in consultation with BSES Representative	Meter	1000
2	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Ordinary Bituminous/C.C.Road (including dewatering if any)	Cum	739
3	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Dense Carpeted bituminous Road (including dewatering if any)	Cum	134
4	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Footpath/tile/Rajasthani Stone/Brick work (including dewatering if any)	Cum	134
5	Digging of cable trench as per specification and drawings. Rate is inclusive of digging and backfilling for Hard Rocky Soil (including dewatering if any)	Cum	67
6	Laying of XLPE cables in the excavated trench, as per BYPL Standards (Regarding Depth, Layer formation, etc). Cable rollers to be used during Laying.	Meter	4500
7	Laying of XLPE cable in HDPE Pipe in Excavated Trench	Meter	300
8	Laying of cable in trenchless ducts including laying of cable and HDPE pipe using HDD machine including laying of 200 mm dia HDPE pipe PN4 PE 80 Class	Meter	1200
9	Continuous steel Barricade for all Excavated areas, till the work is completed.	Meter	1000
10	Dismantling of the existing 66KV D/C OH Line and Towers, (Approx Line length of 1.0KM's) and handing over the dismantled Material to BYPL Stores	Lot	1
11	Fixing of Aluminum Cable identification tags with Nylon string at every 30 Mtrs cable length	No's	120
12	Installation of straight through joints for 66 kv 1Cx1000 sq mm cables by jointing kit OEM authorized jointer	No's	18
13	Installation of End Termination for 66kv 1Cx1000 sq mm cables by jointing kit OEM authorized jointer	No's	12

S No	Work Description	UoM	Quantity
14	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Ordinary bituminous road/C.C. Road	No's	12
15	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Dense carpeted bituminous road.	No's	2
16	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Footpath/ tile/ Rajasthani Stone / Brick Works	No's	2
17	Digging of joint pit suitable for 66 cable joint box and covering the joint box with sand and providing protection for Hard Rocky Soil.	No's	2
18	Spreading of sand forming cushion and cover around the cable	Cum	369
19	Disposal of debris/surplus malba including Loading / Unloading	Cum	406
20	Watch and ward of complete circuit till project handover	Lot	1
21	Installation of Precast RCC Cable cover	No's	2667
22	Installation of Route and Joint indicating stone marked with "BYPL 66 KV Cable Helpline No-91-11-4124 9808"	No's	38
23	Laying of PVC warning tape	Meter	1600
24	Fabrication and installation of Galvanized Channel, Angle, Beam and other Structural steel with hardwares, MS Reinforcement steel bars for all structures including cable support Structure	MT	10
25	Erection of 66 kV Lightning Arrestors Including supply of T & P, all consumable items such as welding rods, hacksaw blades etc and modification in support structure for fixing as required.	No's	12
26	Erection of 110 Lbs 42 Feet Rail Pole including digging , refilling, ramming of the foundation and including removal of malba ,grouting with cement concrete mortar to 16 cft. of 1:3:6 ratios (1 cement, 3 Badarpur, 6 Stone blast-Cement,Sand and Mortar).Painting of Rail with one coat of primer & two coat of Al paint Including brick padding.	No's	8
27	Mounting of existing cable with end termination on new Gantry structure using HDPE cleat.	No's	12
28	Jumpering between existing cable terminations to new cable termination with hardwares, ACSR conductors i/c.sagging and jumpering complete for 6Nos.Conductors with one earth wire.	No's	4
29	Hi Voltage DC testing for 66 kV cable on complete cable length	Lot	1
30	VLF High voltage test on complete cable length as per relevant IEC/IEEE	Lot	1
31	Partial discharge test on complete cable length at site	Lot	1
32	Tan Delta test on complete cable length at site	Lot	1

S No	Work Description	UoM	Quantity
33	Installation of Single Phase link box with SVL including cable earthing/armour connection with grid earthing	No's	18
34	Installation of Single Phase link box without SVL including cable earthing/armour connection with grid earthing	No's	18
35	Installation of Three Phase link box with SVL including cable earthing/armour connection with grid earthing	No's	4
36	Installation of RCC chamber for Three Phase link box	No's	4
37	Installation, mounting and fixing of 66 kV 1Cx1000 sq mm cable with termination on mounting structure/tower and fixing it with suitable HDPE cleats	No's	24
38	Installation of support insulators on cable mounting structure with misc. hardware's.	No's	12
39	Fixing of danger plate on poles including fabrication of clamps etc	No's	12
40	Fixing of circuit Name plate including fabrication of clamps etc	No's	12
41	Fixing of anti climbing device on cables mounting structures including fabrication of clamps etc	No's	4
42	Transportation of empty 66 kV cable drums from site to BSES store	No's	12
43	Laying of GI earth connecting strip of 50x6 sq mm size including required welding, painting on joints etc	MT	1
44	Erection of earthing electrodes with earth enhancement compound and interconnection with equipment including nut-bolts, welding, paint work on welding as per BYPL earthing specification SP-GES-107-R0	No's	24
45	Making of civil goomitties around earthing electrode as per standard design of BSES including supply of necessary bricks, cement, badarpur, sand, cover of size 1'x1' and providing the same at the top of goomitties.	No's	24
46	Submission of actual laid drawing of cable circuits including GPS coordinates of all joint in cables circuits	Lot	1
47	Cable Phasing work, Cable Phase Sequence (R,Y,B) Marking, Cable circuit number Marking, and final connection as per Phase Sequence.	Lot	1
48	Masonry Brick work with 1 cement : 6 coarse sand	Cum	1
49	Masonry Brick flooring work with 1 cement : 6 coarse sand	Sq meter	1
50	15 mm cement plaster on rough side of brick wall of mix 1:4 (1 cement : 4 fine sand)	Sq meter	1

S No	Work Description	UoM	Quantity
51	Providing and laying in position cement concrete 1:1.5:3 (1 cement :1.5 coarse sand : 3 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement	Cum	1
52	Providing and laying in position cement concrete 1:2:4 (1 cement :2 coarse sand : 4 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement	Cum	1
53	Providing and laying in position cement concrete 1:4:8 (1 cement :4 coarse sand : 8 graded stone aggregate) excluding the cost of centering, shuttering, finishing and enforcement	Cum	1
54	Supply & Spreading of blue stone aggregate 20 mm uniformly in yard of grid s/stn i/c/ Gantry, loading, unloading as per site requirement	Cum	1
55	Centering, shuttering including shuttering propping etc and removal of shuttering	Cum	1
56	Fabrication of reinforcement for RCC work including straightening, cutting, bending, placing in position and binding all complete thermo mechanically treated bars.	Cum	1
57	Installation of Brick as Cable Separator	No's	1
58	Supply and fixing of wire mesh fencing 2.5 mtr height with gate frame of 3 mtr x 2.5 mtr with complete material including painting eg angle, chain link, wire mesh and civil material etc complete as per specification & drawing of BSES. Angle iron size 50x50x6 mm & MS strip 50 x 3 mm, Wire mesh 1"x3" of 8 SWG wire to be used for wire-mesh with providing support at 1.25m distance.	Sq meter	1
59	ETC of RFID Marker	No's	18

Note:

1. All the Testing's shall be witnessed by BYPL. All the Site Test Reports should be submitted, before charging of the Cables.

4. DOCUMENT SUBMISSION MATRIX

Document/Drawing submission shall be as per the matrix given below:

- i. All documents/drawings shall be provided in soft copy only in returnable Pen drives
- ii. Language of the documents shall be English only.
- iii. Incomplete submission shall be liable for rejection.
- iv. Document check sheet compliance shall be the first sheet for each submission stage i.e. Technical bid, Drawing Approval, Pre Dispatch, Pre closure
- v. No submission is acceptable without check list compliance.
- vi. Deficient/ improper document/ drawing submission shall be liable for rejection.
- vii. Order of documents shall be strictly as per the check list.
- viii. Any drawing not included in the below table but necessary for detailed engineering shall be deemed to be included in bidder's scope.

S. No	Detail of Document	Bid	Approval	Pre Dispatch	Pre closure
1	Cable GTP in accordance with BSES specification	Yes	Yes	Yes	
2	Cross sectional drawing of offered cable	Yes	Yes		
3	GTP & component drawing of cable straight through joint	Yes	Yes	Yes	
4	GTP & component drawing of cable End termination kit	Yes	Yes	Yes	
5	CPRI/ERDA type test report of offered cable design	Yes	Yes		
6	CPRI/ERDA type test report of offered straight through Joint kit along with offered make cable	Yes	Yes		
7	CPRI/ERDA type test report of offered end termination kit along with offered make cable	Yes	Yes		
8	Cable Route Layout drawing	Yes	Yes		
9	Installation drawings including cable trench drawing, joint pit, earthing electrodes (GI Pipe and MS rod), GI Pipe, HDPE Pipe, Lightning Arrester, Name Plate, Warning Tape, Route Marker, Joint Marker, RCC cover, Danger plate, anti climbing device and other miscellaneous items		Yes		
10	Drawing of Gantry structure for cable termination		Yes		Yes
11	VLF, Partial discharge and Tan delta test results for every circuit duly stamped and signed by BSES representative				Yes
12	Deviation Sheet	Yes	Yes		

S. No	Detail of Document	Bid	Approval	Pre Dispatch	Pre closure
13	Actual as laid drawing of complete circuit with GPS coordinates at every a) 30 meter circuit length b) Cable joints c) Every turn/curve d) Every road crossing (both ends) Drawing shall be submitted in hard copy (minimum A3 Size) and AutoCAD dwg				Yes
14	Factory Test Reports to be submitted, for the Material supplied (Cables, Cable Jointing Kits etc)			Yes	

5. SCOPE DEMARCATION

S. No	Head	BYPL Scope	Bidder's Scope	Remarks
1	Road Cutting Permission and Road Restoration	✓	✗	NA
2	Permissions from Various External and Internal Agencies Regarding Cable Laying and Commissioning(Traffic Police, GAIL, IGL etc)	✗	✓	Statutory fees will be borne by BYPL
3	Supply, Erection, Testing and commissioning of Equipments related to schemes	✗	✓	As per specifications & Standards
4	Drawing Submissions	✗	✓	NA
5	Engineering Approvals	✓	✗	NA
6	Testing Equipments	✗	✓	NA
7	Lighting Arrangement	✗	✓	NA
8	Construction Power and Construction Water	✗	✓	NA
9	Safety of Manpower (Labour, Engineers, Supervisors etc) and Security of Material, till Handing-over to O&M.	✗	✓	NA
10	Various Tools and Tackles related to Job	✗	✓	NA
11	Transportation of Material and any other tender related work	✗	✓	NA
12	Cleanliness around work premises	✗	✓	NA

S. No	Head	BYPL Scope	Bidder's Scope	Remarks
13	Security and Safety of material until handing over to O&M.	x	✓	NA
14	Various Machines, Material, Special Tools & tackles, e.g. Crane, Hydra, JCB, Hammer Cutting Machine etc to complete the Job	x	✓	NA
15	Maintenance of Equipments Until Handover	x	✓	NA
16	Loading and Unloading of material	x	✓	NA
17	Electrical Inspector Clearance	x	✓	Statutory fees will be borne by BYPL
18	Continuous Steel Barricading with Mobile no of Vendor's Engineer Incharge	x	✓	Steel barricade should have small scheme description along with vendor and BYPL name on it
19	Permit to work request to BYPL authority	x	✓	Permit Should be applied to Engineer Incharge prior to work through proper procedure
20	Permit to work issuance from BYPL authority	✓	x	NA
21	Temporary office and Material Store near work premises	x	✓	NA
22	Storage of Material	x	✓	BYPL store will not be used for any kind of material storage and issuance
23	Dismantled material loading, Unloading and transportation to BYPL store	x	✓	Store location will be within BYPL premises
24	Preparation, updation and submission of PERT chart, detailed work Progress Report with Photographs, fortnightly to track activities	x	✓	NA
25	Submission of final drawing showing layout of cable in Google map along with of cable joint locations	x	✓	Approval will be done by BYPL Representative



S. No	Head	BYPL Scope	Bidder's Scope	Remarks
26	Removal and renaming of existing switchboards' painting as per their route	x	✓	Painting colour and material should be in line with the existing ones for aesthetic look
27	Any other supply item or scope of work missing in given sheet to complete all these schemes/ Work	x	✓	NA
28	Any damage to Public Utilities/Properties, Like Gas Pipeline, Water Pipeline, Sewage Pipeline, Telephone/ Fibre optic cables, Power Cables of any other Circuits, Traffic Signal or camera cables, etc Shall be rectified/ replaced.	x	✓	Any Damages to be rectified on priority, in minimum possible Time.

VOLUME – III

TECHNICAL SPECIFICATIONS

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

TECHNICAL SPECIFICATION
FOR
66kV SINGLE CORE CABLE
SPECIFICATION NO. – SP-66KVSC-178-R0

<i>Rev 00</i>	<i>Date 09 March 2021</i>	<i>No. of Page 16</i>
Prepared by	Jeena Borana	 b8b1c444-d6e3-4459-b793-d46d1e00a2fc
	Abhishek Vashistha	<i>Abhishek Vashistha</i> 7a74fd4f-a91f-4234-85f0-0b2b5098ec32
Reviewed by	Puneet Duggal	<i>Puneet Duggal</i> 404db803-a91f-4234-85f0-0b2b5098ec32
Approved by	Gaurav Sharma	 23dc2de2-95de-4472-99a7-dea873f472b6

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

INDEX

INDEX	2
1.0 SCOPE.....	3
2.0 STANDARDS & CODES.....	3
3.0 SERVICE CONDITIONS.....	3
4.0 DESIGN FEATURES.....	4
5.0 INSPECTION & TESTING.....	7
6.0 SHIPPING, HANDLING & SITE SUPPORT	8
7.0 DEVIATIONS.....	9
8.0 DOCUMENT SUBMISSION MATRIX.....	9
Annexure – A: Guaranteed Technical Particulars (Data by Supplier).....	10

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE**1.0 SCOPE**

The scope of supply includes Design, Manufacture, testing at manufacturer's works before dispatch, packing, delivery including unloading and stacking of 38/66kV single core cable complete with all accessories at site/store.

2.0 STANDARDS & CODES

Materials, equipment and methods used in the manufacture of Cable shall conform to the latest edition of following:

S No.	STANDARD	DESCRIPTION
2.1	IS-8130	Conductor for insulated electric cables & flexible cords
2.2	IS-5831	PVC insulation and sheath of electric cables
2.3	IS-3975	Mild steel wires strips and tapes for armoring cables
2.4	IS-5216	Guide for safety procedures and practices in electrical works
2.5	IS-7098 (Part – III)	Cross-linked polyethylene insulated thermoplastic sheathed cables specification.
2.6	IS – 10810	Methods of test of cables
2.7	IEC-60811	Common test methods for insulating and sheathing materials of electric cables and optical cables
2.8	IEC-60228	Conductor for insulated cables
2.9	IEC-60840	Power cable with extruded insulation and their accessories for rated voltage above 30kV up to 150kV- Test methods and requirements

3.0 SERVICE CONDITIONS

Cables to be supplied against this specification shall be suitable for satisfactory operation under the following service conditions-

3.1	Average grade atmosphere	Heavily polluted, Dry
3.2	Maximum altitude above sea level	1000M
3.3	Relative Humidity	100%
3.4	Ambient air temperature	Highest 50 Deg C Average 40 Deg C Minimum 0 Deg C
3.5	Operating temperature	0 Deg C - 50 Deg C
3.6	Rainfall	750mm concentrated in four months

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

4.0 DESIGN FEATURES

S No.	Parameters	Technical Requirements	Offered by Vendor
4.1.0	Manufacturing process	The cable shall be manufactured by “Triple head extrusion process”. The conductor screen, Insulation & Insulation screen shall be co-extruded by onetime process to ensure homogeneity and reduction of voids in the insulation and the screening system of the cable, whereby enhancing the life of the cable. The cable shall be strictly manufactured by “DRY CURED” process.	
4.2.0	Conductor	Electrolytic grade aluminum conductor shall consist of flexibility class-2 in accordance with IS 8130/IEC 60228. The shape of conductor shall be compacted, stranded, and circular.	
4.3.0	Longitudinal water sealing of conductor	Shall be achieved by water swelling fibers in the interstices of the conductor. The fibers shall turn into jelly/swell, when in contact with water making the conductor water tight.	
4.4.0	Semi conducting separator tape	Semi-conducting separator tapes shall be applied over the conductor, suitable for continuous operating conductor temperature of 90°C.	
4.5.0	Conductor screen	The conductor screen shall consist of extruded semi-conducting compound which shall be fully compatible with the conductor and extruded insulation. Outer surface of semiconductor screen shall be super smooth, cylindrical and firmly bonded to the overlaying insulation.	
4.6.0	Insulation	The extruded WTR - XLPE insulation shall be of very high degree of purity. The average thickness shall not be less than nominal value as given in annexure “A”. The minimum thickness at any point shall not be less by more than 10% of the nominal value. Percentage eccentricity of the insulation shall not be more than 10%.	
4.7.0	Insulation Screen	The insulation screen shall consist of extruded semi-conducting compound which shall be fully compatible with extruded insulation. Insulation screen shall be firmly bonded to the insulation.	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Parameters	Technical Requirements	Offered by Vendor
4.8.0	Make of insulation and semi conducting screen	For Insulation: WTR-XLPE of Dow/Borealis/Hanwa For Conductor & Insulation Screen: Semiconducting compound of Dow/Borealis/Hanwa Any deviation to above shall not be acceptable.	
4.9.0	Core	The ovality of the core shall not be more than 5%.	
4.10.0	Inner Longitudinal water sealing bedding	Semi-conducting water swell-able tapes shall be applied over the extruded semi-conducting insulation screening with a minimum overlap of 10%.	
4.11.0	Metal screening (if required to meet the short circuit rating)	The metallic screen shall consist of a layer of copper tape applied in helical form. Copper tape overlap: Minimum 10%	
4.12.0	Outer Longitudinal water sealing bedding (if metallic screening is provided)	Semi-conducting water swell-able tapes shall be applied over the metallic screen again with a minimum overlap of 10%.	
4.13.0	Metallic sheath	The metallic sheath shall be made of Corrugated aluminum with minimum thickness in accordance with Table-6B of IS 7098 Part – III	
4.14.0	Outer Sheath	The outer sheath shall consist of extruded black colored HDPE type ST-7 with anti-termite protection. The minimum thickness shall be 3.3 mm at any point. Carbon black content shall be 2.5 ±0.5%	
4.15.0	Semi conductive layer over the outer sheath	Extruded Semi conductive layer shall be provided.	
4.16.0	Cable Rating	The cable size shall be suitable to carry rated load current on 66 kV continuously without exceeding the maximum conductor temperature of 90° C.	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

4.17.0	Drum Length	<p>500 meter +/- 5% (short lengths not acceptable except the last length and minimum acceptable short length shall be 250 meters.). The overall quantity tolerance shall be as per purchase order.</p> <p>Manufacturer shall not be allowed to put two cable pieces of different short length in same cable drum.</p>	
4.18.0	Embossing	<p>The extruded outer sheath shall be embossed with meter marking at interval of 1 meter.</p> <p>The "A" end meter marking and "Z" end meter marking and the drum lengths shall be printed on the drum flange along with other markings.</p> <p>The outer sheath shall also be embossed with (min.)</p> <ul style="list-style-type: none"> a) Voltage designation b) Type of construction/cable code (e.g. A2X2Y) c) Number of core and nominal cross sectional area. d) Type of cable "Electric Cable" e) Manufacturers name & trade mark f) Name of buyer (e.g. BYPL) g) Month & year of manufacturing h) Batch no / Lot no. i) Sequential length marking j) Purchase order number & date k) ISI mark l) Individual Drum number 	
4.19.0	Joints and Terminations	<p>The Joints and Terminations to be offered with the cable shall be fully type tested as per IS 60840. The Joints and Terminations shall match all technical performance parameters of the specified cable. The Joints and Terminations would be either Heat Shrink or Cold-Shrink.</p>	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

5.0 INSPECTION & TESTING

S No.	Parameters	Technical Requirements	Offered by Vendor
5.1.0	Type test	<p>The cable and the associated accessories like Joints and terminations of same voltage, design and number of cores shall be Type Tested from CPRI/ERDA as per IEC 60840/IS 7098 (part-3) with latest amendments.</p> <p>All type tests shall be carried out in accordance with IEC-60840 / IS 7098 (part-3) and in accordance with the sequence prescribed therein.</p>	
5.2.0	Routine test	Each drum length of cable shall be subjected to the tests as mentioned in IEC 60840, IS 7098 (Part-3), IEC 60229 and IS 10810	
5.3.0	Acceptance Tests	<p>The sampling & acceptance tests shall be conducted as per IEC: 60840 / IS: 7098 (Part-3) and approved QA plan for each lot of cable during the inspection of lot at manufacturer's works.</p> <p>The following tests shall be carried out as special tests</p> <ul style="list-style-type: none"> a) Conductor examination as per IEC-60840 for conformance of IEC 60228/IS 8130. b) Void and contamination as per IS 7098 (Part-3) c) Sheath Integrity Test d) Carbon black content test in Inner sheath & Outer Sheath 	
5.4.0	Inspection	<p>The buyer reserves the right to inspect cables at the Seller's works at any time prior dispatch, to verify compliance with the specifications.</p> <p>In-process and final inspection call intimation shall be given in 10 days advance to purchaser.</p> <p>In the event of any discrepancy in the test reports i.e. test reports not acceptable or any type tests (including special /additional tests, if any) not carried out , same shall be carried out without any cost implication to BSES before dispatch of cable.</p>	
5.5.0	Test certificates	Three sets of complete test certificates shall be submitted along with the dispatch documents.	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

6.0 SHIPPING, HANDLING & SITE SUPPORT

6.1.0	Packing	The cable shall be wound on non-returnable steel drums of suitable size of minimum hub diameter of 20D (where D is the overall diameter of the cable) and packed conforming to international standards. The drum shall be fully enclosed by suitable packing preferably PP sheeting. Cable shall have sea worthy packing in case cables are dispatched by shipping lines.
6.2.0	Pulling eye & sealing of Cable ends	A cable pulling eye shall be provided at “Z” end of cable on each drum. Suitable fillings/putty shall be used for sealing gap between outer sheath and pulling eye. Heat shrinkable sleeves with the pulling eye shall also be provided. The pulling eye shall be directly connected to the conductor and be capable to withstand a tensile load of 30N/mm ² of conductor area. The “A” end of the cable shall be sealed with filling material/putty and heat shrinkable cap. Drawing of the pulling eye shall be submitted along with the bid for review.
6.3.0	Drum identification label	<p>The following information shall be marked on the drum:</p> <p>The following information shall be marked on the drum:</p> <ol style="list-style-type: none"> a) Drum identification number b) Trade name or trade mark; if any c) Name of manufacturer d) Name of buyer i.e. BYPL e) Nominal sectional area of the conductor of the cable f) Type of cable and voltage for which it is suitable g) Length of the cable on the drum, with “A” end and “Z” end markings h) Purchase order number with SAP item code i) Year and month of manufacturing j) Direction of rotation of drum (an arrow) k) Net weight of cable in drum and gross weight of cable with drum l) Batch no or Lot no.
6.4.0	Shipping	The seller shall give complete shipping information concerning the gross weight, size of each packing.
6.5.0	Handling & Storage	Manufacturer instruction shall be followed. Detail handling & storage instruction sheet/manual needs to be furnished before commencement of supply.
6.6.0	Transit damage	The seller shall be responsible for any transit damage due to improper packing.

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

7.0 DEVIATIONS

7.1	Deviation	Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assumed that the bidder complies fully with this specification.
-----	-----------	---

8.0 DOCUMENT SUBMISSION MATRIX

Document/Drawing submission shall be as per the matrix given below:

- i. All documents/drawings shall be provided in soft copy only in returnable Pen drives
- ii. Language of the documents shall be English only.
- iii. Incomplete submission shall be liable for rejection.
- iv. Document check sheet compliance shall be the first sheet for each submission stage i.e. Technical bid, Drawing Approval, Pre Dispatch.
- v. No submission is acceptable without check list compliance.
- vi. Deficient/ improper document/ drawing submission shall be liable for rejection.
- vii. Order of documents shall be strictly as per the check list.
- viii. Any drawing not included in the below table but necessary for detailed engineering shall be deemed to be included in bidder's scope.

S No.	Description	Bid	Approval	Pre Dispatch
8.1	Guaranteed Technical Particulars (GTP)	required	required	
8.2	Deviation Sheet, if any	required	required	
8.3	Detailed cross sectional drawing of cable	required	required	
8.4	Type test reports for the offered type and rating of cable and joints & terminations	required	required	
8.5	Complete product catalogue and Manual	required	required	
8.6	Certification for quality standards	required		
8.7	Make of Raw Materials	required	required	
8.8	Cable de-rating factors	required	required	
8.9	Dimensional drawing for pulling eye & End cap		required	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Bid	Approval	Pre Dispatch
8.10	Manufacturer's Quality Assurance Plan		required	
8.11	Program for production and testing		required	
8.12	Detailed installation & commissioning instructions		required	
8.13	Test certificates of all raw materials			required
8.14	Inspection and routine test reports, carried out in manufacturer's works			required

Annexure – A: Guaranteed Technical Particulars (Data by Supplier)

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
1	Name of Manufacturer			
2	Country of manufacturer			
3	Type of cable			
4	Standard according to which cable is manufactured			
5	Rated voltage	kV	38/66	
6	Highest system voltage	kV	72.5	
7	System frequency	Hz	50	
8	No of phases per circuit	Nos	3	
9	System earthing		Solidly grounded	
10	Rated short time current of conductor	kA		
11	Rated short time current of metal sheath (alone)	kA		
12	Rated short time current of metal screen (if provided)	kA		
13	Rated short time current of metal sheath and screen	kA	19	
14	Duration of short circuit current	Sec	1	
15	Impulse withstand voltage 1.2/50 micro sec wave	kVp	325	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
16	Power frequency withstand voltage	kV(rms)	140	
17	Conductor			
a)	Nominal cross sectional area	mm ²	1000 / 630	
b)	Type class of conductor		Compacted Stranded Circular	
c)	Material of conductor		Aluminum	
d)	Flexibility class of conductor		Class -2	
e)	Minimum numbers of strands	No.		
f)	Diameter of strands before compaction. (nominal / Minimum)	mm / mm		
g)	Material of longitudinal water sealing filling of conductor			
18	Details of semi conducting tape over the conductor			
19	Conductor Screen			
a)	Material and type			
b)	Minimum thickness	mm	0.8	
c)	Make and grade of semi conducting compound.			
20	Insulation			
a)	Material of Insulation		TR-XLPE	
b)	Nominal thickness	mm	11	
c)	Minimum thickness		9.9	
d)	Make and grade of insulation compound			
e)	Maximum dielectric stress at the conductor surface	kV/mm		
21	Insulation screen			
a)	Material and type			
b)	Minimum thickness	mm	0.8	
c)	Make and grade of semi conducting compound.			
22	Inner water swellable tape			

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
a)	Nominal thickness	mm	0.3	
b)	Minimum swell height in one minute.	mm	12 mm in one minute	
c)	Water swallable tape overlap	%	min 10%	
23	Copper tape required to meet the short circuit rating (if provided)			
a)	Thickness and width of copper tape	mm / mm		
24	Outer water swellable tape	mm		
a)	Nominal thickness	mm	0.3	
b)	Minimum swell height in one minute.	mm	12 mm in one minute	
c)	Overlap	%	10% min	
25	Nominal diameter under metal sheath	mm		
26	Material of the metal sheath		Corrugated aluminum (with corrosion protection & corrugation filling)	
27	Minimum thickness of Corrugated Aluminum sheath	mm	1.75	
28	Nominal radial clearance allowed under metal sheath (in case of corrugated aluminum sheathing)	mm	Vendor to provide	
29	Nominal diameter over metal sheath	mm		
30	Outer Sheath			
a)	Material and type		HDPE type ST 7	
b)	Minimum thickness	mm	3.3	
c)	Nominal thickness	mm	4	
d)	Anti termite treated?		Yes / No	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
e)	Color		Black	
31	Material of semi-conductive coating/extrusion over the outer jacket		Semi conductive coating	
32	AC test voltage at works for insulation.	KV(rms)	90	
33	DC test voltage at works for outer jacket.	KV (DC)	25	
34	Overall dia of completed single core cable	mm		
35	Weight per meter of complete cable	kg/m		
36	Short circuit capacities with maximum conductor temperature of 250Deg C : (conductor temperature of 90 Deg C at the commencement of short circuit) a) 0.5 second duration b) 1 second duration c) 2 second duration d) 3 second duration	kA		
37	Minimum radius of bend round: which cable can be laid a) Direct burial in ground b) In ducts	mm		
38	Maximum D.C. resistance of conductor per KM at 20°C	Ohm/km	0.0469 for 630 mm ² cable 0.0291 for 1000 mm ² cable.	
39	Maximum AC resistance of conductor per KM at 90 deg. C	Ohm		
40	Equivalent star reactance per KM of 3 phase circuit at 50 Hz	Ohm		
41	Maximum electrostatic capacitance per KM of cable	pf		
42	Maximum continuous current carrying capacity per circuit when laid in ground as per the following parameters (with screens cross bonded)	Amp		

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
	-Maximum continuous conductor temperature of 900 C -Maximum conductor temperature during short circuit of 2500 C -Ground temperature of 300C -Soil resistivity of 1500C- cm/Watt -Depth of laying of 150cm			
43	Maximum continuous current carrying capacity per cable when laid in air with ambient temperature of 40°C and other parameters as per S no 42 (with screens cross bonded)	Amp		
44	Rating factors for ambient air temperature attached	Yes/No		
45	Rating factors for ground temperature attached	Yes/No		
46	Rating factors for phase spacing in flat formation attached	Yes/No		
47	Rating factors for grouping of cable laid in ground in horizontal formation attached	Yes/No		
48	Rating factors for grouping of cable laid in ground in tri-foil touching formation attached	Yes/No		
49	Rating factors for thermal resistivity of soil attached	Yes/No		
50	Rating factors for depth of laying attached	Yes/No		
51	Max. power factor of charging KVA of cable when laid direct in the ground at normal voltage frequency at conductor temperature at 90°C			
52	Max. dielectric power loss of cable per km of 3 phase circuit laid direct in ground at normal voltage, frequency and maximum conductor temperature of 90°C	Watt /km		

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE




S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
53	Sheath loss of cable per KM of 3 phase circuit at normal voltage frequency at maximum continuous current rating. a) Laid direct in ground b) Drawn into ducts c) Installed in air	Watt/km		
54	Impedance per KM of 3 phase circuit at 50 C/s and maximum conductor temperature. a. Positive and negative sequence b. Zero sequence	Ohm		
55	Standard drum length of cable	meters	500 +/- 5% (short lengths not acceptable except the last length)	
56	The overall quantity tolerance	%		
57	Cable to be wound on non returnable steel drum.	Yes/No	Yes	
58	Normal delivery length	meters		
59	Cable pulling Eye to be provided at "Z" end			
60	Tensile load withstand capacity for pulling eye		30 N / mm ²	
61	Approximate shipping weight for the normal deliver length with the drum size (flange dia. in mm and width in mm)	kg		
62	Drum size (Flange dia X flange width X hub dia)			
63	Embossing details on outer sheath			
64	Sequential marking at every meter		Provided	

TECHNICAL SPECIFICATION FOR 66KV SINGLE CORE CABLE

S No.	Description	Unit	Data specified by the purchaser	Data to be filled by the manufacturer
65	Process of cross linking of polyethylene.			
66	Induced Voltage in sheath, cable			
a)	In trefoil formation	V/km		
b)	In flat formation with D+70	V/km		
67	Cross Sectional Drawing of offered cable design with layer wise component details		To be provided by bidder	

Technical Specification
For Heat Shrinkable And Cold Shrinkable
Straight Through Jointing Kit
(11 KV, 33 KV, 66 KV XLPE Insulated Cables)

Specification no – SP-HCSTJ-03-R0

Prepared by		Reviewed by		Approved by		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
Ashish		Gaurav		DS		R0	22/04/2013

**Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through
Joining Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)****Index**

Record of Revision	3
1.0.0 Scope of work.....	4
2.0.0 Codes & standards	4
3.0.0 Cable Construction	5
4.0.0 Straight-Through Joints (STJ).....	6
5.0.0 Quality Assurance Plan (QAP)	11
6.0.0 Deviations.....	11
7.0.0 Delivery	12
Annexure - A: Guaranteed Technical Particulars (GTP).....	13
Annexure - B: Kit Content Table (KCT)	15
Annexure - C: Routine and Acceptance Test	16
Annexure - D: Deviation Sheet.....	17
Annexure - E: Service Conditions.....	17
Annexure - E: Aluminium crimping-type Ferrule for compacted circular conductor only for Heat Shrink joints	18
Annexure – F: Strip type GI canister (V.B. Can) for joint protection only for Heat Shrink Joint.....	19

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**1.0.0 Scope of work**

- A. Heat Shrinkable / Cold shrinkable Straight Joint Kits (hereinafter briefly referred to as “STJ Kits”), suitable for 11 kV, 33 & 66kV XLPE cables, shall be designed, manufactured, tested, packed and delivered by the Vendor, as per Purchaser’s requirements.
- B. Supervision, during installation of joints at site if mentioned in the order.
- C. During post-installation period, if a joint fails at site, the vendor shall depute a technical team to site for a root-cause analysis of the failure of the joint, in the presence of BSES officials. An Analysis Report shall then be submitted for BSES’s review and approval. If this report concludes the cause of failure as due to a design/manufacturing defect in a component, then vendor shall replace all such components in the entire stock available with BSES.

2.0.0 Codes & standards**2.1.0 National Standards:**

S No.	Standard Number	Title
2.1.1	IS- 13573: 2011	Joints & Terminations of Polymeric Cables for working voltages from 6.6 kV up to and including 33 kV Performance Requirements and Type Tests
2.1.2	IS- 7098: Part 2:1985	Cross-linked Polyethylene (XLPE) Insulated PVC sheathed cables: Part 2 - For working voltages from 3.3 kV up to and including 33 kV
	IS- 7098: Part 3:1993	Cross-linked polyethylene insulated thermoplastic sheathed Cables specification: Part 3 - For working voltages from 66 kV up to and including 220 KV
2.1.3	IS- 10810: 1984	Methods of test for cables

2.1.1 International Standards:

S No.	Standard Number	Title
2.2.1	EA TS - 09-13	Electricity Association - Technical Specification – 09 - 13 Material component for use in Electric Power Cable Termination & Joints for System voltage above 1kV up to 36 kV
2.2.2	IEC - 60183	Guide to the selection of high voltage cables
2.2.3	IEC - 885 Part 1 to 3	Electric test methods for electric cables
2.2.4	IEC - 60502 - 4	Power Cable Accessories for XLPE Cables above 3kV & up to 30 kV Test methods
2.2.5	IEC - 60840	Power cable with extruded insulation and their accessories for rated voltage above 30 kV (Um=36 KV) up to 150 KV (Um=170 KV) - test methods and requirements.

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**3.0.0 Cable Construction**

Normal sizes of XLPE cables used in BSES system and the construction features of these cables are indicated below:

- 11kV, 3-core x 150 sq mm AL
- 11kV, 3-core x 300 sq mm AL
- 11kV, 1-core x 1000 sq mm AL
- 33kV, 3-core x 300 / 400 sq mm AL
- 66kV, 1-core x 630 sq mm AL
- 66KV, 1 core x 1000 sq mm AL

3.1.0	Conductor	a) Electrolytic Grade Stranded Aluminium Conductor b) Grade: H2 / H4 as per IS: 8130 / 1984 (For Al) c) Stranded, compacted and circular in shape d) Class 2 e) Longitudinal "Water-Blocking Arrangement" (or water-tight construction or water barrier protection)
3.1.1	Conductor Screen	Extruded Semi Conducting material
3.1.2	Insulation	Extruded XLPE Insulation.
3.1.3	Insulation Screen	Freely strippable Semi Conducting (without application of heat) for 66KV firmly bonded.
3.1.4	Water Swell able Tape	Semi-conducting Water Swell able Tape under the copper tape on each core.
3.1.5	Copper Tape	Copper Tape applied helically over the layer formed by application of insulation screen, water swell able tape and identification strip
3.1.6	Filler	All interstices, including center interstices filled by PP filler.
3.1.7	Over all three cores	Binder tape
3.1.8	Inner Sheath	Extruded Inner Sheath of Black PVC type ST-2.
3.1.9	Armour	a) For 3-core Cables : Galvanized Steel flat strip armour b) For 1-core Cables : Non-Magnetic, Hard drawn Aluminium wire (flat/round) c) Corrugated aluminium or lead sheathed for 66KV Cable
3.1.10	Binder Tape	Rubberized cotton tape
3.1.11	Outer Sheath	Extruded outer sheath of PVC (ST-2) for 11 KV and 33 KV and HDPE ST 7 for 66KV with termite- repellent and anti-rodent properties.

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.0.0 Straight-Through Joints (STJ)

General Technical Requirements for Straight-Through Joints (STJ) for XLPE cables are as follows:

Scope: Design, manufacture, testing and supply of Straight-Through Joint Kits for 11 KV, 33 KV & 66KV Power Cables.

Functional requirements for Heat Shrinkable / Cold Shrinkable STJ joints are given below:

4.1.0 Heat Shrinkable / Cold Shrinkable STJ joints		
4.1.1	Cable preparation	Cable preparation shall be as per installation instruction sheet. Manufacturer shall be provide Installation instruction sheet in every kit
Connector		
4.1.2	Conductor Screen	<p>For 11kV</p> <p>a) Conductors to be jointed by crimping connectors</p> <p>b) Annular CSA (cross-sectional area) of the ferrule shall not be less than CSA of the conductor of the cable. Length of the ferrule shall be sufficient to allow adequate number of crimps, to limit temperature rise at the joint. (Vendor to furnish dimensional drawing for ferrule, indicating crimp marks.)</p> <p>c) For aluminium cable, the crimped ferrule shall be of aluminium</p> <p>d) Refer annexure F for GA drawing of crimping ferrule</p> <p>For 33kV and 66KV</p> <p>a) Shear bolt type mechanical connector</p> <p>b) Approved make:</p> <ul style="list-style-type: none"> • Tyco Electronics (BSM-185/400-U) • Pfisterer (332617010) • Or equivalent make (Manufacturer shall take prior approval from CES) <p>d) Maintain smooth surface over connector after cut the shear head bolt</p> <p>e) Vendor to furnish drawing for the mechanical connector</p>
4.1.3	Void filling and stress relief over crimped connector and cut point of the insulation screen.	By means of High permittivity mastic tapes / Lubricant.
4.1.4	Metal screen continuity	By means of Tinned copper wire mesh, wrap individual core from cu screen with 50 % overlap and continue on other side cu screen. Bind the copper wire mesh on copper screen with copper binding wire
Armour / Earthing Continuity		

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.1.5	Armour bond	a) By means of a combination of steel (G.I.) support ring (for 3 - core Cable) or Aluminium support ring (for 1 - core Cable) and two nos. of stainless steel hose clips. b) GI Support Ring shall be 'zinc-sprayed with central bulge / bump'.
4.1.6	Armour continuity	By means of two nos. Of tinned copper braided conductor of 25 sq. mm. for 11 kV 35 sq. mm. for 22 or 33kV and 50 sq mm for 66KV.
Accessories		
4.1.7	Suppression of electrical discharges over XLPE insulation	Cleaning solvent /equivalent, for manual application.
4.1.8	Installation Instruction	Shall be provided in English and Hindi and shall be inside every kit.
4.1.9	Sheet paper Tap	Paper tape, required for measurements during jointing, shall be provided inside every kit.
4.1.10	Identification Tag (for traceability)	a) An aluminum pouch with paper tag & sealing arrangement at one end shall be provided. b) This tag is required to be tied over the cable at one side of the joint. c) The paper tag shall give following information 1) Vendor kit designation 2) Cable section/Division 3) Type of joint 4) Size of Joint 5) Make of joint 6) Voltage class 7) Serial no. of kit 8) Vendor lot & batch no 9) Month & year of manufacturing 10) Date of installation 11) Name of jointer 12) Name of vendor supervisor 13) Name of BSES supervisor 14) Remarks
4.1.11	Printing on each Heat/cold shrinkable or Moulded component	Month and year of manufacturing, batch no. /lot no., size, make, type etc.

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.2.0 Only for Heat Shrinkable STJ joints

4.2.1	Stress Control System	<p>a) The earthed insulation screen of an XLPE cable is terminated at a suitable distance from the connector (Ferrule).</p> <p>b) The stress control tube is in electrical contact with insulation screen.</p> <p>c) Impedance of the tube shall be constant up to an operating temperature and shall be within the range 1×10^8 ohm-cm to 8×10^8 ohm-cm.</p> <p>d) The physical and electrical properties shall conform to EA TS 09-13.</p>
4.2.1	Insulation build-up	<p>a) Maximum three layers of insulation tubes shall be used. Total thickness of the insulation being provided in the joint shall not be less than 1.2 times the insulation of the cable being jointed.</p> <p>b) Outer-most tube shall be screened insulating tube (dual wall tube). This tube shall be manufactured by extrusion process.</p> <p>c) Physical and Electrical properties shall conform to EA TS 09-13.</p>
4.2.2	Sealing end of tube	By means of Core end sealing sleeve with red mastic coating
4.2.3	Mechanical Protection	<p>a) For 3-core cable: By means of a rollable steel mat (with required protective coating against corrosion)</p> <p>b) For 1-core cable:</p> <p>i) Copper wire mesh</p> <p>ii) Adhesive coated medium wall tube</p> <p>iii) One more layer of copper wire mesh</p> <p>iv) Medium wall tube</p>
4.2.4	Corrosion Protection	By means of semi-rigid tubes, internally coated with water blocking sealant. Thick wall Insulating tube

4.3.0 Only for Cold Shrinkable ST joints

Scope:

The term cold shrink applies to materials, which are capable of shrinking without raising the material above the ambient temperature of its immediate surroundings. The material of the rubber insulator used in the Cold Shrink assembly shall be silicone which is factory expanded and placed on a removable core. The removing of the core causes the cold shrink assembly to shrink. The cold shrink assembly shall maintain a compressive force on the cable continuously throughout the life of the product. This pressure will ensure a complete moisture seal.

4.3.1	Stress Control System	By means of one piece body (splice assembly) providing stress control, insulation and screen continuity.
-------	-----------------------	--

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.3.2	Mechanical Protection	By application of mastic coated vinyl tape and armor cast structural material. The taped armor cast layer may also be sprayed with water to hasten the curing.
-------	-----------------------	---

4.4.0	Technical Particulars	Vendor shall submit Guaranteed Technical Particulars (GTP) as per Annexure A.
-------	-----------------------	---

4.5.0 Testing & Inspection

4.5.1	Type Tests	a) Straight-Through Joint shall be of type-tested quality. b) In addition to this, vendor will be required to conduct type-testing on heat/cold -shrinkable and moulded components, stress grading mastic, etc., in line with EA TS 09-13 standard, at third party test laboratory once in 6 months on randomly selected sample of each voltage rating without any commercial implication.
4.5.2	Routine & acceptance Tests	I) All the routine and acceptance tests shall be carried out as per EA TS 09-13 guidelines, refer Annexure C. II) H.V. Test shall be carried out on a randomly selected and installed Straight-Through Joint, in the presence of Purchaser's representative, at manufacturer's works. III) The joint shall withstand a test of 4Uo voltage for 4 hours.
4.5.6	Inspection	I) Purchaser reserves the right to inspect /witness all tests on the STJ Kits at Seller's works at any time, prior to dispatch, to verify compliance with the specification. II) In-process and / or final inspection call intimation shall be given in advance to purchaser.
4.5.7	Test Certificates	i) Three sets of complete Test Certificates (Routine & Acceptance tests) shall be submitted along with the delivery of STJ Kits. ii) Bought-out Items: Vendor shall submit Test Certificates, lot/batch number-wise, from their sub- suppliers / principal. TC's should clearly indicate the measured technical parameters, in accordance with sub-supplier's specification. (Also refer Annexure - C)
4.6.0	Documents	"Documents" refer to Documents, Data, Manuals, etc. (Scanned copy of signed documents also shall be part of entire soft file (e-file) or CD.

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.7.0	Along with the Bid	Vendor shall submit signed 3 sets (plus 1 set of soft copy) of following documents a) GTP (duly filled-in) (as per Annexure — A) b) Cross-sectional drawings for components Assembly. c) Type Test Certificates d) Complete Catalogue and Installation Instructions. e) Any other document.
4.8.0	After Award Contract	Vendor shall submit signed 2 sets (plus 1 set of soft copy) of above-mentioned documents within 15 days, for Purchaser's approval.
4.8.0	"As-Built" documents	Final signed "As-built" documents for the equipment in 3 sets (hard copy), 1 no. soft copy and 1 no. CD. These documents shall include signed Routine & Acceptance Test Certificates also.
4.9.0	Packing, Marking, Shipping, Handling and Storage	a). Every component / kit / box shall be properly sealed/ packed for protection against damage. Stress grading mastic shall be packed in air-tight / air-sealed packing. b). Every kit box shall be wrapped in polythene covers. c). Separate packing (sub-kits) shall be provided, for components (given below) used in crotch area and connector area. These sub-kits, labeled as "CROTCH KIT" and "CONNECTOR KIT", shall be placed inside every kit box. i) Crotch Kit Components --Conductive cable break-out -- Yellow moulded wedge -- Break-out end sealing tube -- Break-out finger sealing tube -- Stress grading mastic ii) Connector Kit : Components -- Ferrule (connector) -- Void Filling mastic (yellow)

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

4.9.1	Identification Label	<p>Markings / Labels shall be on both sides of every packed box.</p> <ol style="list-style-type: none"> 1) Identification number/type designation (as per manufacturer's standard) 2) Voltage grade, size, description of the Kit (including the voltage grade, size, type of the cables, for which it is to be used) 3) Batch no., lot no., etc. 4) Quantity 5) a) Purchase Order no. & date b) Purchaser's name c) BSES's SAP code number 6) Weights (kg) of each Cable Termination Kit and of each box containing kits. 7) Manufacturer's name 8) Month & Year of Manufacturing 9) Date of packing, shelf life (if applicable)
4.9.2	Transit damage	The seller shall be responsible for any transit damage due to improper packing.

5.0.0 Quality Assurance Plan (QAP)

5.1.0	Vendor's Quality Assurance Plan (QAP)	To be submitted for Purchaser's approval.
5.2.0	Sampling Method	Sampling Method for quality checks shall be as per manufacturer's standard practice / ESI guidelines and Purchaser's prior approval shall be taken for the same.
5.3.0	Inspection Hold-Points	To be mutually identified, agreed and approved in Quality Plan.

6.0.0 Deviations

6.1.0	Deviations	<ol style="list-style-type: none"> a) Deviations from this specification can be acceptable, only where the Seller has listed in his quotation the requirements he cannot, or does not, wish to comply with and which deviations the Buyer has agreed to in writing, before any order is placed. b) In the absence of any list of deviations from the Seller, it will be assumed by the Buyer that the Seller complies with the Specification fully.
-------	------------	---

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**7.0.0 Delivery**

7.1.0	Delivery	Dispatch of Material: Vendor shall dispatch the material, only after the Routine Tests /Final Acceptance Tests (FAT) of the material witnessed/waived by the Purchaser, and after receiving written Material Dispatch Clearance Certificate (MDCC) from the Purchaser.
-------	----------	---

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**Annexure - A: Guaranteed Technical Particulars (GTP)**

The Vendor is deemed to have examined all parts of the Specification documents and to have been fully informed, as to the nature of work and the conditions related to its performance.

S No.	Description	Purchase requirement	Vendor's data
1	Manufacturer's name		
2	Purchase Order no. & date		
3	Guarantee Period (minimum)	60 Months (from date of commissioning) / 66 Months (from date of receipt at Purchaser's store), whichever is earlier	
4	Applicable IS / IEC Standard followed by Vendor (incl. type test standard)		
5	Voltage Grade (kV)		
5.1	Lightning Impulse Voltage Withstand Test		
5.2	4Uo AC voltage withstand test for 4 hours	To be conducted on Installed joint at works	
6	Continuous operating temperature	90 deg. C	
7	Functional Requirements		
7.1	Method of Stress Control and Discharge Suppression		
7.2	Method of Insulation build-up and screening		
7.3	Method of earth bond a) Size and no. of braids b) Size of armour support c) No. of hose clips		
7.4	Method of mechanical protection a) for 3-core Cable b) for 1-core Cable		
7.5	Method of protection against corrosion (type & coating thickness of protective layer on steel mat)		
7.6	Method of conductor continuity a) For crimping connector b) For mechanical connector		

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

8	Description of items in the Kit, which are imported /sourced From Principal /Sub-suppliers		
9	Names of items in the Kit and their respective shelf life (months years)		
10	Kit Content Table (KCT) enclosed? (Refer Annexure — B)	Yes / No	
11	Drawing for connector (ferrule) enclosed	Yes / No (If yes, mention the document reference)	
12	Is Annexure - D (Technical Deviation Sheet) duly filled-in?		
13	Packing (Qty) i) Packing of every Kit h) Group Packing	1 no -- No. of Kits per Box -- No. of Boxes	
14	Installation Procedure enclosed?	Yes / No (If yes, mention the document reference)	
15	Quality Assurance Programme (QAP for raw materials, in-process inspection, factory testing) is enclosed?	Yes / No	
16	Whether all heat-shrinkable and moulded components of the kit meet the requirements of and have been tested in accordance with EA TS -09-1 3.(for heat-shrinkable joints)	Yes / No (If yes, details of test report no. /Date /name of test laboratory to be mentioned.)	
17	Type Test Reports (TTR) (Relevant test report no. & date, With type, size, other details of each type of Kit.) a) Prepared Joint: CPRI TTR as per BIS / IEC enclosed? b) Loose Components: CPRI TTR as per EA TS 09-13 enclosed?	Yes/No Yes/No	
18	Printing details on each of the Heat- shrinkable and Moulded components	(Mention the text, presently printed on each of the component)	

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**Annexure - B: Kit Content Table (KCT)**

Vendor shall submit KCT as a consolidated table, consisting of all data, such as:

A. Heading

1. Voltage grade, size, description of the Kit
(Including the voltage grade, size, type of the cables, for which it is to be used)
2. Type designation (as per manufacturer's standard)

B. Details / Parameters (For each component/item of the KCT)

1. Lot no. /Batch no., etc.
2. Item number (manufacturer's standard)
3. Description
 - a) Material, type, make and grade
 - b) Dimensions cross sectional area
 - c) Colour,
 - d) Other description, if any
4. Function of the item
5. Quantity
6. Make/Name/Location of manufacturer/sub-vendor
 - a) Minimum supplied (or in expanded form) diameter
 - b) Maximum freely recovered diameter
7. a) Minimum supplied (or in expanded form) thickness
b) Maximum freely recovered thickness

C. Notes on the KCT

Markings, printings and other details for individual/group of components is to be mentioned on KCT. For example:

- a) Printing of item code, size, batch no., etc.
- b) Printing on components
- c) Other embossing or engraving, if any.

(Note: Vendor may attach an Annexure, for any additional information, if required.)

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**Annexure - C: Routine and Acceptance Test****A. Visual Examination**

Condition of selected items / components, as per sampling method, shall be recorded. Some of the normal check-points can be as follows:

1. Every component shall be verified in quantity and description as per KCT.
2. All items shall be free from any defects, pin holes, cracks, etc.
3. Metallic components to be free from sharp edges.

B. Measurements of Dimensions

(Required / observed dimension — length, diameter, etc.)

1. Supplied dimensions
2. Recovered dimensions

C. Destructive Testing

On various heat-shrinkable / moulded components of ready Kits (items 3 and 4 are applicable only for heat-shrinkable components)

1. Tensile Strength
2. Wall Thickness Ratio
3. Heat Shock
4. Longitudinal Change, after full recovery
5. Ultimate Elongation
6. Low Temperature Flexibility
7. Dielectric Strength
8. Volume Resistivity

Routine Test Reports (RTR) (Typical)

Each RTR shall clearly indicate P.O. no. & date and also BSES's SAP code no. RTR shall record the serial numbers of the kits selected, as per vendor's sampling method. Following details, besides vendor's/manufacturers standard check-points, shall appear in every RTR.

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)**Annexure - D: Deviation Sheet**

Sr No.	Clause No.	Deviation


Annexure - E: Service Conditions

(Atmospheric conditions in Delhi)

a)	Average grade Soil Condition	
b)	Maximum altitude above sea level	1000 M
c)	Ambient Air temperature	Highest 50 Deg C, Average 40 Deg C
d)	Minimum ambient air temperature	0 Deg C
e)	Relative Humidity	100 % Max
f)	Thermal Resistivity of Soil	150 Deg C cm/W
g)	Seismic Zone	4
h)	Rainfall	750 mm concentrated in four months

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

Annexure - E: Aluminium crimping-type Ferrule for compacted circular conductor only for Heat Shrink joints

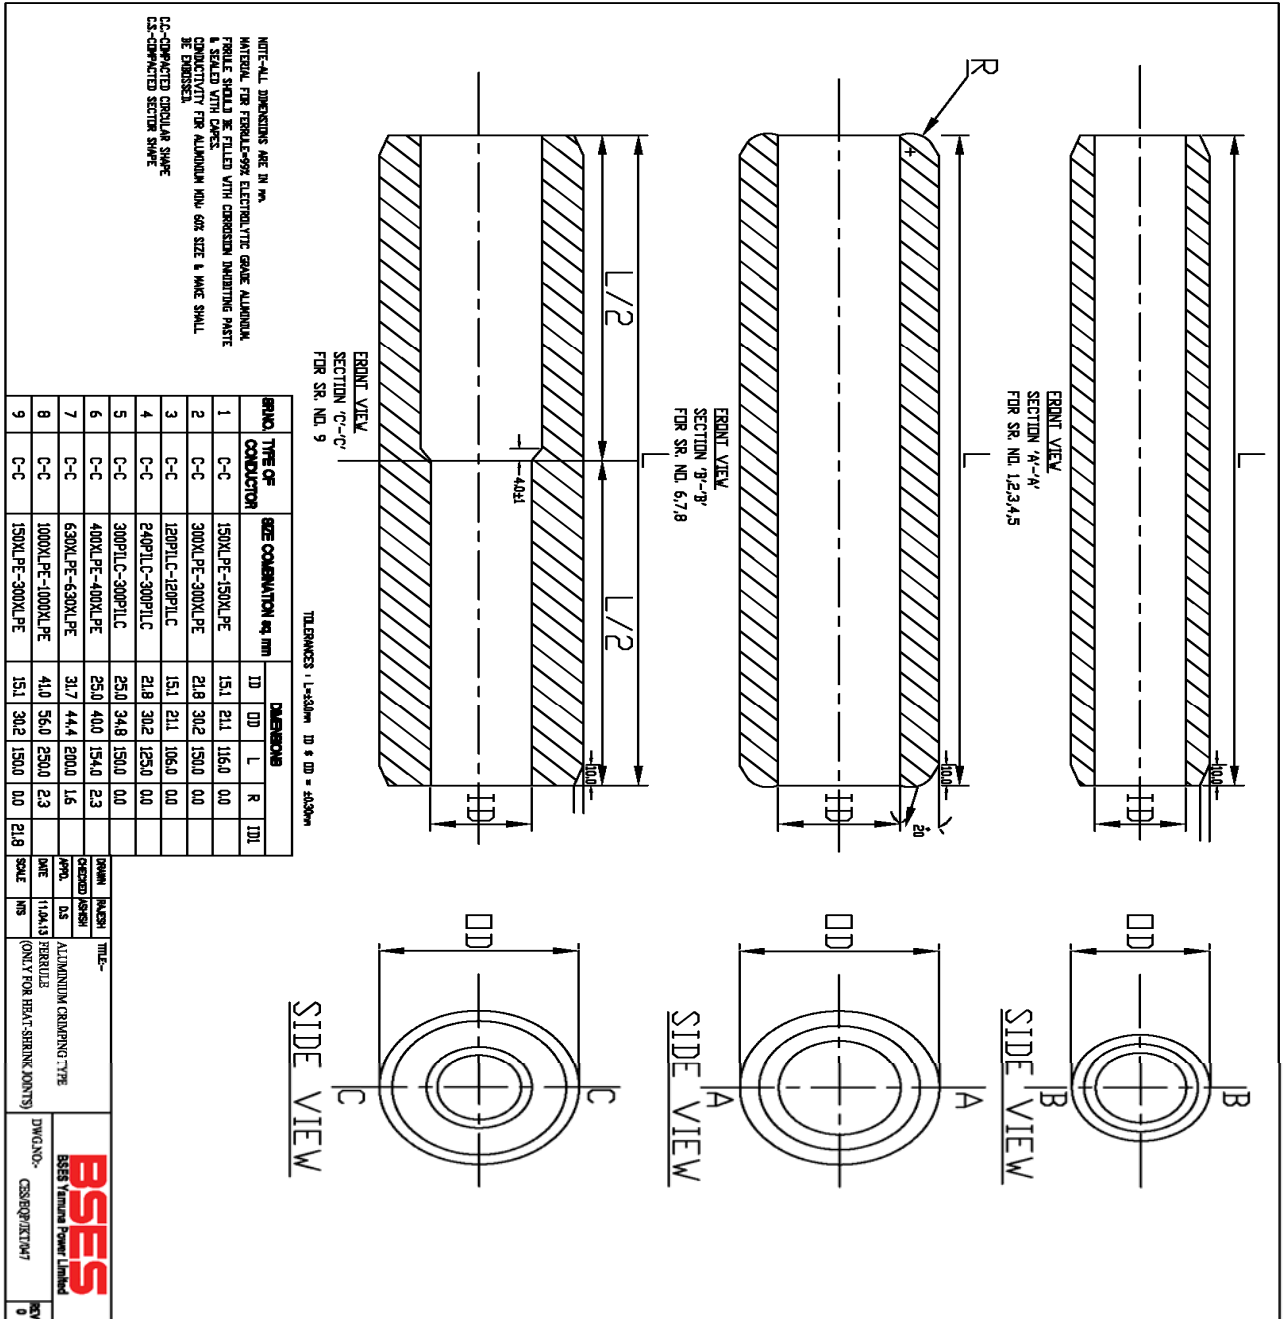

Technical Specification For Heat Shrinkable And Cold Shrinkable Straight Through Jointing Kit (11 KV, 33 KV, 66 KV XLPE Insulated Cables)

Annexure – F: Strip type GI canister (V.B. Can) for joint protection only for Heat Shrink Joint

SIDE-B

SIDE-B

NOTE-ALL DIMENSIONS ARE IN mm

1) MATERIAL-STEEL STRIPS
THICKNESS 1mm-4.2mm
WIDTH 10mm-42mm
CUTTING-SUITABLE ANTI-CORROSIVE
2) ADHESIVE TAPE-3 PLY LAMINATE INCLUDE ALUMINIUM FOIL WITH POLYESTER FILM

DIMENSIONS FOR STRIP TYPE GI CANISTER




SRNO.	VOLTAGE	JOINT SIZE	NO. OF STRIPS	LENGTH	WIDTH (W)
1	11KV	120PILC-120PILC	40	1450	460
2	11KV	240PILC-240PILC	46	1550	460
3	11KV	120PILC-150XLPE	40	1450	400
4	11KV	240PILC-300XLPE	46	1550	460
5	11KV	120PILC-300XLPE	46	1550	460
6	11KV	70PILC-300XLPE	46	1550	460
7	11KV	150XLPE-150XLPE	34	1260	340
8	11KV	300XLPE-300XLPE	36	1360	360
9	11KV	150XLPE-300XLPE	36	1360	360
10	33KV	300PILC-300PILC	50	1850	500
11	33KV	300PILC-400PILC	50	1850	500

DESIGN	INCHES	TITLE-
CHECKED	ISSUED	STRIP TYPE GI CANISTER (V.B. CAN) FOR JOINT PROTECTION (GENERAL ARRANGEMENT)
DATE	D.S	
SCALE	1:100/1:3	
	INS	

DWG NO.-	BSES BSES Transmission Power Limited
CS/302/1/17/048	
REV	0

**Technical Specification
For Heat Shrinkable and GIS Cable Termination
Kit (For 11 KV, 33 KV & 66 KV Cables)**

Specification no – SP-HSGTK-04-R0

Prepared by		Reviewed by		Approved by		Rev	Date
Name	Sign	Name	Sign	Name	Sign		
Ashish		Gaurav		DS		R0	22/04/2013

Index

Record of Revision	3
1.0.0 Scope of work.....	4
2.0.0 Codes & standards	4
3.0.0 Cable Construction	4
4.0.0 Cable Termination Kits	6
5.0.0 Quality Assurance (QA)	10
6.0.0 Deviations.....	10
7.0.0 Delivery	10
Annexure – A: Guaranteed Technical Particulars (GTP).....	11
Annexure – B: Kit Content Table (KCT)	13
Annexure – C: Routine and Acceptance Test.....	14
Annexure – D: Technical Deviation Sheet.....	15
Annexure – E: Service Conditions	15
Annexure – F: Bimetallic Aluminium / Copper Lug	16
Annexure – G: Aluminum Lug For XLPE Cable	17

Record of Revision

Item/Clause No.	Change in Specification	Approved By	Rev

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)**1.0.0 Scope of work**

Heat Shrinkable & GIS Termination Kits, suitable for 11 kV & 33 kV, 66KV XLPE / PILC cables, shall be designed, manufactured, tested, packed and delivered by the Vendor, as per Purchaser's requirements.

2.0.0 Codes & standards

2.1.0 National Standards:

SL	Standard Number	Title
2.1.1	IS - 13573: 2011	Joints & Terminations of Polymeric Cables for working voltages from 6.6 kV up to and including 33 kV Performance Requirements and Type Tests
2.1.2	IS – 7098 Part 2 : 1985	Cross-linked Polyethylene (XLPE) Insulated PVC sheathed cables : Part 2 : For working voltages from 3.3 kV upto and including 33 kV
2.1.3	IS - 692: 1994	Paper insulated lead-sheathed cables (PILC) for rated voltages up to and including 33 kV specification
2.1.3	IS - 10810: 1984	Methods of test for cables

2.1.1 International Standards:

S No.	Standard Number	Title
2.2.1	EA TS - 09 - 13	Electricity Association - Technical Specification -09-13 Material component for use in Electric Power Cable Termination & Joints for System voltage above 1000 V up to 36 kV
2.2.2	IEEE - 48	Standards Test Procedures and requirements for high voltage alternating current cable termination
2.2.3	IEC - 60183	Guide to the selection of high voltage cables
2.2.4	IEC - 885 Part 1-3	Electric test methods for electric cables
2.2.5	IEC - 60840	Power cable with extruded insulation and their accessories for rated voltage above 30 kV (Um=36 KV) up to 150 KV (Um=170 KV) - test methods and requirements.

3.0.0 Cable Construction

Normal sizes of XLPE cables used in BSES system and the construction features of these cables are indicated below:

XLPE type Cables: 3-core x 150 or 300 sq. mm. Al
1-core x 630 or 1000 sq. mm. Al

PILC type Cables: 3-core 240 or 300 sq. mm. Al

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

3.1.0	Conductor	<p>For XLPE :</p> <p>a) Electrolytic Grade stranded Aluminium Conductor / Annealed Copper Conductor</p> <p>b) Grade: H2/ H4 as per IS: 8130/84 (For Al)</p> <p>c) Shape: Compacted Circular</p> <p>d) Class 2</p> <p>For PILC :</p> <p>a) 11 kV : sector-shaped</p> <p>b) 33kV: oval-shaped</p>
3.2.0	Conductor Screen	<p>For XLPE :</p> <p>Extruded Semi Conducting material</p> <p>For PILC :</p> <p>11 kV : no conductor screen 33 kV : carbon paper</p>
3.3.0	Insulation	<p>For XLPE: Extruded XLPE Insulation</p> <p>For PILC: Layers of impregnated papers</p>
3.4.0	Insulation Screen	<p>For XLPE :</p> <p>a) Freely strippable Semi Conducting (without application of heat) for 66KV firmly bonded</p> <p>b) Copper Tape</p> <p>For PILC :</p> <p>a) 11 kV : absent (Belted)</p> <p>b) 33kV: metallised paper tape</p>
3.5.0	Water Swellable Tape	<p>For XLPE: Semi-conducting Water Swellable Tape shall be provided under the copper tape on each core.</p> <p>For PILC : not applicable</p>
3.6.0	Filler	<p>For XLPE: All interstices, including centre interstices filled by PP filler.</p> <p>For PILC :</p> <p>a) 11 kV : Crushed paper filler</p> <p>b) 33kV: Jute twine</p>
3.7.0	Over all three cores	<p>XLPE : Binder tape</p> <p>PILCA :</p> <p>11 kV : belt paper</p> <p>33kV: Copper Woven Fabric tape</p>
3.8.0	Inner Sheath	<p>For XLPE: Extruded Inner Sheath of Black PVC type ST-2.</p> <p>For PILC : Lead alloy sheath</p>
3.9.0	Bedding Tape	<p>For XLPE: not applicable</p> <p>For PILC: two layers of paper, followed by compounded (bituminized) cotton tape.</p>
3.10.0	Copper Woven Fabric Tape (CWF tape)	<p>For XLPE : not applicable</p> <p>For PILC :</p> <p>a) 11 kV : absent (Belted cable)</p> <p>b) 33 kV : applicable for screened cable</p>

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

3.11.0	Armour	For XLPE : a) Galvanised Steel round Wires/ Galvanised steel flat strip armour (For 3 core cables) b) Hard drawn Aluminium Wire (For 1 core cables) c) Aluminium or lead sheathed for 66KV cable For PILC : a) 11 kV double steel tape armour
3.12.0	Binder Tape	For XLPE: Rubberised cotton tape
3.13.0	Outer Sheath	For XLPE: Extruded outer sheath of PVC (ST-2) for 11 KV/ 33 KV and HDPE for 66KV Cable with termite- repellent. For PILC : compounded (bituminised) Jute/PVC

4.0.0 Cable Termination Kits

General Technical Requirements for Cable Termination Kits are as follows:

4.1.0	Scope	Design, manufacture, testing and supply of Cable Termination Kits for H. T. Power Cables.
4.2.0	Functional Requirements	
4.2.1.	Conductor Connection	a) Lug connection by crimping. b) Sizes of lugs are standardised as follows: 1. For 120 sq. mm. PILC cable and 150 sq. mm. XLPE cable, the lug suitable for 150 sq. mm. XLPE cable shall be used. 2. For 240 sq. mm. PILC cable and 300 sq. mm. XLPE cable, the lug suitable for 300 sq. mm. XLPE cable shall be used. c) For aluminium cable, the lug shall be of aluminium d) Bi-metallic type lug having an aluminium barrel and a copper palm shall be considered for termination kit for RMU application. Refer Annexure E for details. e) For GIS cable termination kits: Conductor connection assembly shall be by standard method of split, silver-plated copper cone and pressure-fit contact assembly or as per manufacturer's standard. f) For 66KV 1cX1000 or 630mm ² aluminium lugs shall be used.

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

4.2.2	Stress Control System	<p>a) The earthed insulation screen of an XLPE cable is terminated at a suitable distance from the conductor.</p> <p>b) The tube is in electrical contact with insulation screen.</p> <p>c) Impedance of the tube shall be constant upto an operating temperature and shall be within the range 1×10^{08} ohm-cm to 8×10^{08} ohm-cm.</p> <p>d) Length of stress control tube for 11 kV and 33 kV shall be 130 mm and 260 mm respectively.</p> <p>e) The physical and electrical properties shall conform to ESI 09: 13.</p> <p>f) For GIS cable termination kits Stress control shall be by means of a polymeric stress cone. External profile of the cone shall match inner profile of GIS epoxy bushing. Vendor shall specify the material (EPDM / Silicone) of the cone.</p>
4.2.3	Insulation Protection	<p>a) XLPE insulation shall be protected by means of an outer tube, resistant to tracking and weathering.</p> <p>b) One end of the tube shall be coated internally with red sealant mastic for a length of 50 mm.</p> <p>c) Physical and Electrical properties shall conform to ESI 09: 13.</p>
4.2.3.1	Outer Anti-tracking Tube	<p>Outer length of the tube shall be controlled by providing creepage Extension Shed having the same material composition as the tube. These lengths are given in the table below:</p>

Cable System		Length of tube (mm)		Creepage Extension Shed (No.)	
Voltage	Cores	Indoor	Outdoor	Indoor	Outdoor
11 kV	3 - core	450 (650 for RMU)	650	Nil	2
	1 - core	340	340	NIL	2
33 kV	3 - core	800	1200	2	5
	1 - core	600	600	2	5

4.2.3.3	Oil Barrier Tube (applicable for PILC cable termination)	<p>a) Transparent tube is used for restoring the insulation provided by belt paper, which is terminated at the crotch.</p> <p>b) 33 kV PILC Termination: The oil barrier tube provides an oil-resistant layer to contain impregnating compound within, thus preventing anti-tracking tube coming in contact with the impregnating compound.</p>
---------	--	---

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

4.2.4	Environmental Sealing System	<p>a) Red Sealant Mastic Tape: This tape, used for sealing at ends, shall be synthetic rubber-based and resistant to tracking and weathering. Sufficient quantity of this tape shall be provided.</p> <p>b) Lug-sealing Sleeve: It shall have the same material composition as outer anti-tracking tube. The sleeve shall be fully coated internally with red sealant mastic tape. Length of the sleeve shall be so as to cover half length of the lug barrel and an equal length of track-resistant tube.</p> <p>c) Conductive Break-out: It shall be provided over the crotch for 3-core cables. The break-out base shall overlap PVC outer sheath by a 50 mm. minimum.</p> <p>d) For GIS termination kits : Environmental sealing of cores below the switchgear shall be by means of a trifurcation kit, consisting of heat shrinkable conductive break-out and heat-shrinkable conductive tube of total length of 6 metres supplied in one roll.</p>
4.2.5	Earth Bond System	<p>a) Earth Bond Assembly shall comprise of copper braided conductors as earthing conductors, GI armour support ring (non-split type) and two stainless steel hose clips.</p> <p>b) For GIS termination kit The earthing arrangement for 3-core cables shall be the same as stated under 'a' above.</p> <p>c) Two nos. copper braided conductors shall be of size: 25 sq. mm. for 11 kV cables, 35 sq. mm. for 33 kV cables and 50 sq. mm.</p> <p>d) Length of the copper braided conductor shall be 750 mm.</p> <p>e) Each copper braided conductor shall be supplied with copper lug, crimped at one end. Size of lug : 70 sq. mm. for 11 kV and 120 sq. mm. for 33 kV.</p>
4.2.6	Suppression of electrical discharges	<p>Following materials are required for use during cable termination :</p> <p>a) Silicone-based compound Required for filling-in minute services/ surface cracks over XLPE insulation.</p> <p>b) Polymeric mastic Required for application over semicon screen, for, eliminating any air-entrapment at any cut point on the surface. It should have sufficient elongation and electrical properties compatible with stress control tube.</p>
4.2.7	Installation. Instruction Sheet	It shall be in English and Hindi language and shall be provided inside every kit.
4.2.8	Paper Measuring Tap	Required for use during cable preparation / terminations.
4.3.0	Technical Particulars	Vendor shall submit Guaranteed Technical Particulars (GTP) as per Annexure A.
4.4.0	Type Tests	Termination Kit shall be of type-tested quality.
4.5.0	Testing & Inspection	
	a) Tests	All the routine and acceptance tests shall be carried out as per ESI guidelines. (Also refer Annexure -C)

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

	b) Inspection	1) Buyer reserves the right to witness all tests specified on individual H. S. components, Moulded components or completed Cable Termination Kit. 2) Buyer reserves the right to inspect Cable Termination Kit at the Seller's works at any time, prior to dispatch, to verify compliance with the specification. 3) In-process and final inspection call intimation shall be given in advance to purchaser.
	c) Test Certificates	Three sets of complete Test Certificates (Routine & Acceptance tests) shall be submitted along with the delivery of Cable Termination Kits.
	d) Type Test	a) End termination kit shall be of type-tested quality. b) In addition to this, vendor will be required to conduct type-testing on heat shrinkable and moulded components, stress grading mastic, etc., in line with EA TS 09-13 standard, at third party test laboratory once in every six months on randomly selected sample of each voltage rating without any commercial implication.
4.6.0	Documents	"Documents" refer to Documents, Data, Manuals, etc. (Scanned copy of signed documents also shall be part of entire soft file (e-file) or CD.)
4.6.1	Along with the Bid	Vendor shall submit signed 3 sets (plus 1 set of soft copy) of following documents: a) GTP (duly filled-in) (as per Annexure - A). b) Cross-sectional drawings for components Assembly c) Type Test Certificates d) Complete Catalogue and Instructions. e) Any other document.
4.6.2	After Award of Contract	Vendor shall submit signed 2 sets (plus 1 set of soft copy) of above mentioned documents within 15 days, for Purchaser's approval.
4.6.3	"As-Built" documents	Final signed "As-built" documents for the equipment in 3 sets (hard copy), 1 no. soft copy and 1 no. CD. These documents shall include signed Routine & Acceptance Test Certificates also.
4.7.0	Packing, Marking, Shipping, Handling and Storage	Every component/kit/box shall be properly sealed/ packed for protection against damage.

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

a)	Identification Labels:	<p>Markings / Labels shall be on both sides of every packed box.</p> <ol style="list-style-type: none"> 1) Identification number/type designation (as per manufacturer's standard) 2) Voltage grade, size, description of the Kit (including the voltage grade, size, type of the cables, for which it is to be used) 3) Batch no., lot no., etc. 4) Quantity 5) a) Purchase Order no. & date b) Purchaser's name c) BSES's SAP code number 6) Weight (kg) of each Cable Termination Kit and of each box containing kits. 7) Manufacturer's name 8) Month & Year of Manufacturing 9) Date of packing, Shelf life (if applicable) 10) In case, the termination kit is for RMU, following text shall be written in bold letters, with higher font size : "For RMU Application".
b)	Transit damage	The seller shall be responsible for any transit damage due to improper packing.

5.0.0 Quality Assurance (QA)

5.1.0	Vendor's Quality Plan (QP)	To be submitted for Purchaser's approval.
5.2.0	Sampling Method	Sampling Method for quality checks shall be as per manufacturer's standard practice / ESI guidelines and Purchaser's prior approval shall be taken for the same.
5.3.0	Inspection Hold-Points	To be mutually identified, agreed and approved in Quality Plan.

6.0.0 Deviations

6.1.0.	Deviations	<p>A) Deviations from this specification can- be acceptable, only where the Seller has listed in his quotation the requirements he cannot, or does not, wish to comply with and which deviations the Buyer has agreed to in writing, before any order is placed.</p> <p>B) In the absence of any list of deviations from the Seller, it will be assumed by the Buyer that the Seller complies with the Specification fully.</p>
--------	------------	---

7.0.0 Delivery

7.1.0.	Delivery	Despatch of Material: Vendor shall despatch the material, only after the Routine Tests/Final Acceptance Tests (FAT) of the material witnessed/waived by the Purchaser, and after receiving written Material Despatch Clearance (MDC) from the Purchaser.
--------	----------	--

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)**Annexure – A: Guaranteed Technical Particulars (GTP)**

The Seller is deemed to have examined all parts of the Specification documents and to have been fully informed, as to the nature of work and the conditions related to its performance.

S No.	Description	Purchase requirement	Vendor's data
1	Manufacturer's name		
2	Purchase Order no. & date		
3	Guarantee Period (minimum)	60 Months (from date of commissioning) / 66 Months (from date of receipt at Purchaser's store), whichever is earlier	
4	Applicable IS / IEC Standard followed by Vendor (incl. type test standard)		
5	Voltage Grade (kV)		
5.1	Lightning Impulse Voltage Withstand Test		
5.2	4Uo AC voltage withstand test for 4 hours	To be conducted on Installed joint at works	
6	Continuous operating temperature	90 deg. C	
7	Functional Requirements		
7.1	Method of Stress Control and Discharge Suppression		
7.2	Method of Insulation build-up and screening		
7.3	Method of earth bond a) Size and no. of braids b) Size of armour support c) No. of hose clips		
7.4	Method of mechanical protection a) for 3-core Cable b) for 1-core Cable		
7.5	Method of protection against corrosion (type & coating thickness of protective layer on steel mat)		
7.6	Method of conductor continuity a) For crimping connector b) For mechanical connector		
8	Description of items in the Kit, which are imported /sourced From Principal /Sub-suppliers		

Annexure – B: Kit Content Table (KCT)

Vendor shall submit KCT as a consolidated table, consisting of all data, such as:

A. Heading

1. Voltage grade, size, description of the Kit
(Including the voltage grade, size, type of the cables, for which it is to be used)
2. Type designation (as per manufacturer's standard)

B. Details / Parameters

(For each component/item of the KCT)

1. Lot no. /Batch no., etc.
2. Item number (manufacturer's standard)
3. Description
 - a) Material, type, make and grade
 - b) Dimensions cross sectional area
 - c) Colour,
 - d) Other description, if any
4. Function of the item
5. Quantity
6. Make/Name/Location of manufacturer/sub-vendor
7.
 - a) Minimum supplied (or in expanded form) diameter
 - b) Maximum freely recovered diameter
8.
 - a) Minimum supplied (or in expanded form) thickness
 - b) Maximum freely recovered thickness

C. Notes on the KCT

Markings, printings, other details for individual/group of components are to be mentioned on KCT. For example:

- a) Printing of item code, size, batch no., etc.
- b) Printing on components
- c) Other embossing or engraving, if any.

(Note: Vendor may attach an Annexure, for any additional information, if required.)

Annexure – C: Routine and Acceptance Test**A. Visual Examination**

Condition of selected items / components, as per sampling method, shall be recorded. Some of the normal check-points can be as follows:

1. Every component shall be verified in quantity and description as per KCT.
2. All items shall be free from any defects, pin holes, cracks, etc.
3. Metallic components to be free from sharp edges.

B. Measurements of Dimensions

(Required / observed dimension — length, diameter, etc.)

1. Supplied dimensions
2. Recovered dimensions

C. Destructive Testing

On various heat-shrinkable / moulded components of ready Kits
(Items 3 and 4 are applicable only for heat-shrinkable components)

1. Tensile Strength
2. Wall Thickness Ratio
3. Heat Shock
4. Longitudinal Change, after full recovery
5. Ultimate Elongation
6. Low Temperature Flexibility
7. Dielectric Strength
8. Volume Resistivity

D. Routine Test Reports (RTR)

(Typical)

Each RTR shall clearly indicate P.O. no. & date and also BSES's SAP code no. RTR shall record the serial numbers of the kits selected, as per vendor's sampling method. Following details, besides vendor's/manufacturers standard check-points, shall appear in every RTR.

Annexure – D: Technical Deviation Sheet

Sr No.	Clause No.	Deviation

Annexure – E: Service Conditions

(Atmospheric conditions at Site)

1	Delhi	
a)	Average grade Atmospheric Condition:	Heavily Polluted, Dry
b)	Maximum altitude above sea level	1000 M
c)	Ambient Air temperature	Highest 50 deg C, Average 40 deg C
d)	Minimum ambient air temperature	0 deg C
e)	Relative Humidity	90 % Max
f)	Thermal Resistivity of Soil	150 Deg. C cmm
g)	Seismic Zone	4
h)	Rainfall	750 mm concentrated in four months

Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

Annexure – F: Bimetallic Aluminium / Copper Lug

**LUG FOR
240/300 sqmm CABLE**

**LUG FOR
120/150 sqmm CABLE**

CONDUCTIVE MATERIAL

ALUMINIUM BARREL
COPPER PLAN
FINAL METAL STATE
JOINING METHOD

FINISH
BRIGHT

1) ALL TEST SHALL BE CARRIED OUT AS PER ICE-61238-1
2) BARRELS SHALL BE CAPPED AND FILLED WITH GREASE SO AS TO AVOID OXIDATION OF THE ALUMINIUM
3) LUGS SHALL HAVE MARKING AS MAKE & SIZE EMBOSSED ON LUG.

>=99.95%
FULLY ANNEALED, INCLUDING JOINT
BARREL SHALL BE FRICTION WELDED TO THE PLAN THIS ACHIEVING THE BEST POSSIBLE TRANSITION BETWEEN THE COPPER PLAN AND ALUMINIUM BARREL

SIZE sqmm	ALUMINIUM						COPPER					
	ØA #0.25	ØC #0.25	B #3	G #3	H #3	L #3	ØE #0.1	ØD #3	I #3	F #3	K #3	J #3
120/150	15.3	21.5	60.0	NA	83.0	23.0	17.0	35.0	42.0	7.3	30.0	110.0
240/300	21.9	31.0	70.0	83.0	90.0	20.0	17.0	35.0	42.0	7.3	31.7	117.0

FORM	REVISION	TITLE	DWG. NO.
CHECKED	DATE	BY	SCALE
MS	11.04.13	MS	MS


NOTE- ALL DIMENSIONS ARE IN mm

BSES
BSES Yerrum Power Limited
DVG-NO- CS/SP/TK/046

REV. 0




Technical Specification For Heat Shrinkable And GIS Cable Termination Kit (11 KV, 33 KV, 66 KV Cables)

Annexure – G: Aluminum Lug For XLPE Cable

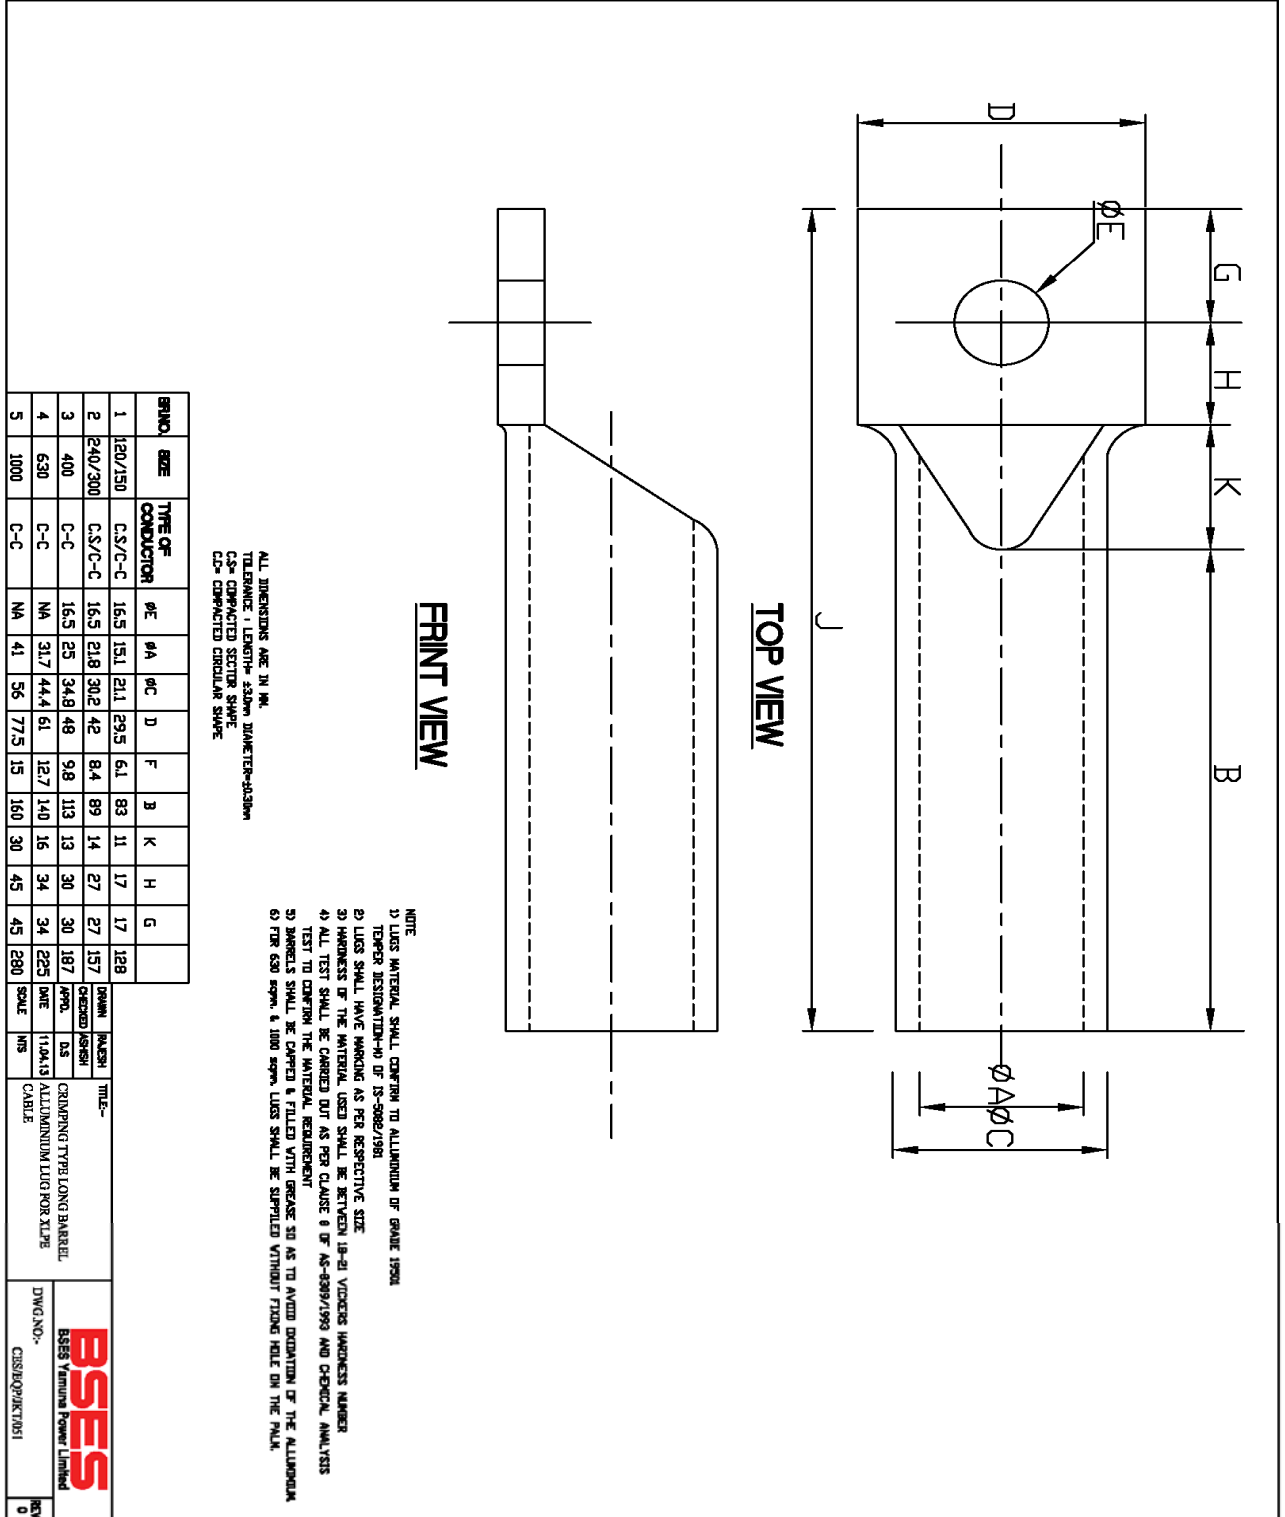

TECHNICAL SPECIFICATION FOR CABLE LAYING

**TECHNICAL SPECIFICATION
FOR
LAYING OF
11 KV, 33KV AND 66 KV CABLE**

Prepared by	Reviewed by	Approved by	Rev	02
			Date	18 th March 2019
AV	GS	AA	Page	1 of 42

TECHNICAL SPECIFICATION FOR CABLE LAYING

INDEX

1.	Reference standards.....	3
2.	Cable laying	4
2.1.	Selection of the route	4
2.2.	Clearances.....	4
2.3.	Depth of Cable Laying	5
2.4.	Width of Cable trenches.....	5
2.5.	Bending Radius of Cables	5
2.6.	Maximum permissible Tensile Strength For Cables.....	6
2.7.	Methods of Laying	7
3.	Jointing of cables	29
4.	Back Filling Trenches and Temporary Reinstatement	33
5.	Permanent Reinstatement of Public Road, foot path etc	34
6.	Identification.....	34
7.	Cable Route Markers.....	35
8.	Cable supports / Clamps.....	35
9.	Installation of Cables in tunnels / basement / below the panels.....	36
10.	Cable Protection at overhead Towers or Poles.....	37
11.	Sun Shades	37
12.	Route Plan	37
13.	Site Facilities to be maintained by the Contractor	38

TECHNICAL SPECIFICATION FOR CABLE LAYING

14. Testing.....	39
15. Barricading and safety requirement	40

1. REFERENCE STANDARDS

- i) IS 1255: Code of practice for installation and maintenance of power cable up to and including 33kV rating.
- ii) IS 1554: PVC Insulated Electrical Cables upto 11KV
- iii) IS 2274: Code of Practice for electrical wiring installation – system voltage exceeding 650V
- iv) IS 7098 Part II: Cross linked Polyethylene Insulated PVC sheathed cables for working voltages from 3.3KV up to and including 33KV
- v) IS 7098 Part III: Cross linked Polyethylene Insulated PVC sheathed cables for working voltages from 66KV up to and including 220KV
- vi) IS 5820: Specification of precast concrete Cable cover.
- vii) Indian Electricity Rules 1956.

TECHNICAL SPECIFICATION FOR CABLE LAYING**2. CABLE LAYING****2.1. SELECTION OF THE ROUTE**

The cable route selection shall be done by the concerned supervising engineer by first conducting route survey and selecting a route along with contractor keeping followings in mind-

- i) The side of road, which presents the least obstacles and the fewest roadways crossings.
- ii) The future consumers and existing cables in the route may influence the cable route.
- iii) Railway, road crossings, MCD and other government agencies may also influence in selection of cable route.
- iv) Plans for future building projects should be considered.

The route shall be as far as possible away from parallel running gas, water pipes and telephone/telecommunication cables.

2.2. CLEARANCES

The desired minimum clearances are as follows –

- i) Power cable to power cable – A minimum clearance equal to diameter shall be maintained. Trench drawings shall be referred for guidance.
- ii) Power Cable to control cables – 0.2 M
- iii) Power cable to communication cable – 0.3M

TECHNICAL SPECIFICATION FOR CABLE LAYING

- iv) Power cable to gas/water main – 0.3 M

2.3. DEPTH OF CABLE LAYING

The desired minimum depth of laying from ground surface to the top of cable shall be

- | | | | |
|------|--|---|-------------|
| i) | 650 / 1100V grade XLPE Cable | - | 75 cm |
| ii) | Low voltage and Control Cable | - | 75 cm |
| iii) | 6.35 / 11KV grade XLPE Cable | - | 90 cm |
| iv) | 19 / 33KV grade XLPE Cable | - | 1.05 M |
| v) | 38 / 66KV grade XLPE Cable | - | 1.20 M |
| vi) | Cables at Road crossing | - | 1.0 M (min) |
| vii) | Cables at railways level crossings (measured from bottom of sleepers to the top of Pipe) | - | 1.0 M (min) |

Whenever there is any obstacle at the laying depth, the cable should be lowered/ raised to cross the obstacle. However variation in the depth is to be approved by BSES. The Contractor shall provide the same in deviation report.

2.4. WIDTH OF CABLE TRENCHES

The width and depth of Cable Trenches shall depend upon number of circuits and Voltage Grade. Drawings of this specification are shown in the document itself.

2.5. BENDING RADIUS OF CABLES

TECHNICAL SPECIFICATION FOR CABLE LAYING

While pulling of the Cable from the drum or during laying following minimum bending radius shall be maintained so that the cable, in particular the insulation does not get damaged.

i) Single Core Cables (PVC & XLPE)

- a) Up to 11KV grade – 15 X D
- b) Above 11KV grade - 20 X D

ii) Multi Core Cables (PVC & XLPE)

- a) Up to 1.1KV grade - 12 X D
- b) Above 1.1KV grade – 15 X D

Where 'D' is overall diameter of the cable

2.6. MAXIMUM PERMISSIBLE TENSILE STRENGTH FOR CABLES**i) For cables pulled with Stocking**

- a) PVC and XLPE SWA Armoured cables $P = 30 \times D$
- b) PVC and XLPE AWA Armoured cables $P = 20 \times D$

Where P= pulling force in Kgm, D= Diameter of Cable in mm

ii) For Cables pulled by Cable eyes

- a) Aluminium conductor – $30 \text{ N/mm}^2 = 3 \text{ Kg/sq. mm}$

TECHNICAL SPECIFICATION FOR CABLE LAYING

b) Copper conductors - $50\text{N/mm}^2 = 5\text{ Kg/sq. mm}$

Permissible force is calculated by multiplying the above values by cross sectional area (CSA) of conductor of each core and then number of cores.

2.7. METHODS OF LAYING

- i) Cables shall be laid in direct in ground, in trenches excavated therein and shall be protected with covers as given in the drawing. Cables shall also be drawn into pipes of ducts or laid in the formed trenches or troughs or on racks or supported in trays or cleats as required by the site exigencies. Where the cables are laid in the formed trenches, the installation shall include removal and replacement of the trench covers and the provision of temporary protective covers on the trenches where they cross the access ways.
- ii) HDPE (200 mm) pipes shall be used where cable cross roads and railways tracks. Spare ducts for future extensions should be provided. Spare duct should be sealed off. Buried ducts or ducting blocks shall project into footpath or up to the edge of road, where there is no footpath, to permit smooth entry of cable without un-due bending. The diameter of the cable conduit or pipe or duct should be at least 1.5 times the outer diameter of the cable. Angular alignment of the duct across road crossings shall be predetermined to maintain safe bending radius when direction of cable trench changes before or after the road.
- iii) The contractor shall lay cable by horizontal direct drilling (HDD) in main roads and highway with heavy traffic, passage to public

TECHNICAL SPECIFICATION FOR CABLE LAYING

property where excavation is not possible. Contractor shall take approval for laying of cable by means of HDD wherever required from the supervising engineer. The cable laid by HDD shall be minimized so that it doesn't exceed by 12% of total route length. This is to avoid De-rating of Cables.

- iv) Unless approved by BSES, the contractor shall lay the cables, direct in ground, in single layer. The cables shall be laid with the pre-determined and approved cable route.
- v) Spacing shall be maintained uniformly between the cables all along the length including the bends, as approved by BSES. To maintain the spacing, suitable non-metallic formers shall be placed uniformly with spacing not exceeding 5 meters. Every bend shall have at least one spacer.
- vi) 75 mm of the sand bed shall be placed at the bottom of cable trench.
- vii) After the cables have been laid the trench shall be filled with the sand and shall be well rammed to a level not less than 75 mm above the top of the cables all throughout the route.
- viii) To protect the cables against external mechanical damage, which may be caused by other agencies, the cable shall be protected by suitable cover.(for dimensions of RCC cable cover refer cable laying drawing)

The type of the covers shall be as under

TECHNICAL SPECIFICATION FOR CABLE LAYING

- a) 1.1KV Cables – Single layer of brick thickness not less than 75 mm (3 inch)
- b) 11KV Cables – sand stone of thickness not less than 75mm (3 inch).
- c) 33KV Cables shall be protected by reinforced concrete cover of width 300 mm as per attached drawing with thickness not less than 50mm.
- d) 66KV Cables shall be protected by reinforced concrete cover as per attached drawing with thickness not less than 50mm.

The RCC cable cover shall be embossed as “BYPL 66/33/11 KV CABLE” whichever is applicable.

- ix) Back fill to be filled up to 75mm and the warning tape shall be installed continuously. The tape shall be yellow in colour with Black / Red lettering of minimum 20mm height. The approved warning message shall be written in English and Hindi/ local language. The minimum thickness and width of the tape should be 300 microns and 150 mm respectively.
- x) The trench shall be filled-up by soft soil (300mm) and Excavated soil as indicated in drawings.

TECHNICAL SPECIFICATION FOR CABLE LAYING

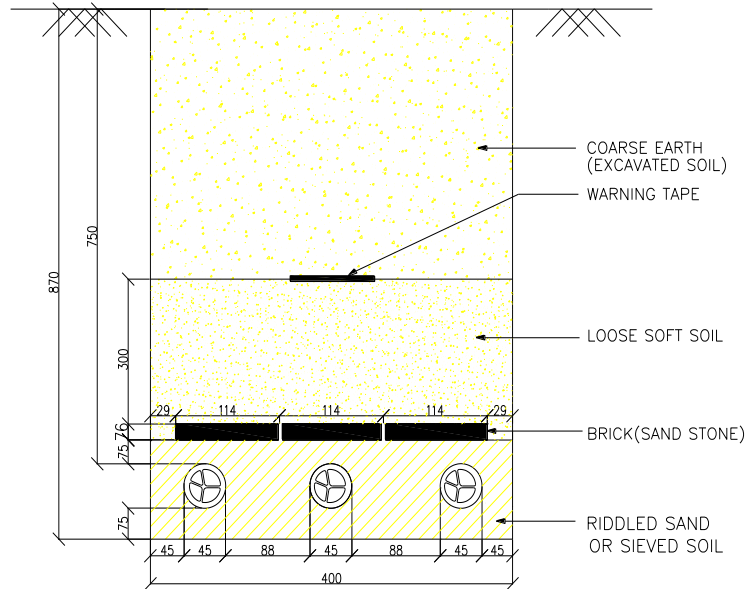


Figure 1.1 – 1.1kV, 150sqmm Buried Cable

TECHNICAL SPECIFICATION FOR CABLE LAYING

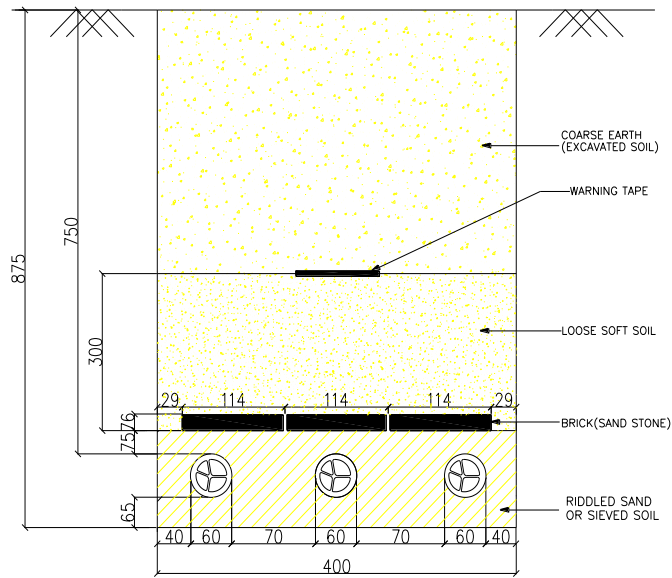


Figure 1.2 – 1.1kV, 300sqmm Buried Cable

TECHNICAL SPECIFICATION FOR CABLE LAYING

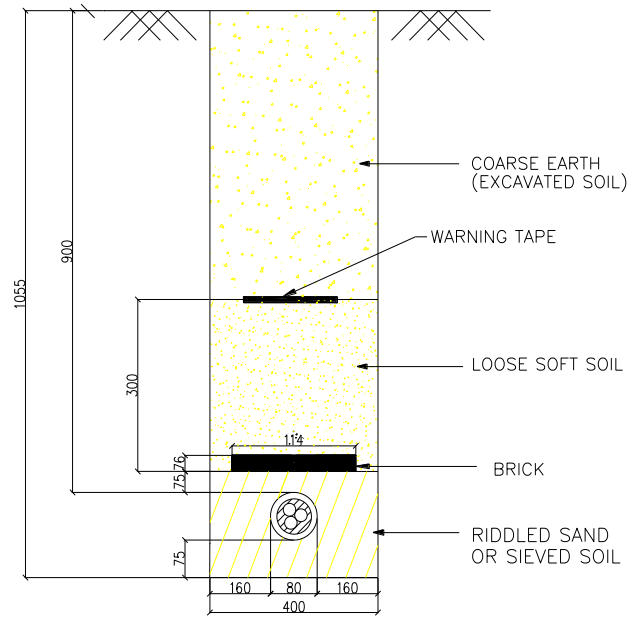


Figure 1.3 – 11kV Buried Cable for Single Circuit

TECHNICAL SPECIFICATION FOR CABLE LAYING

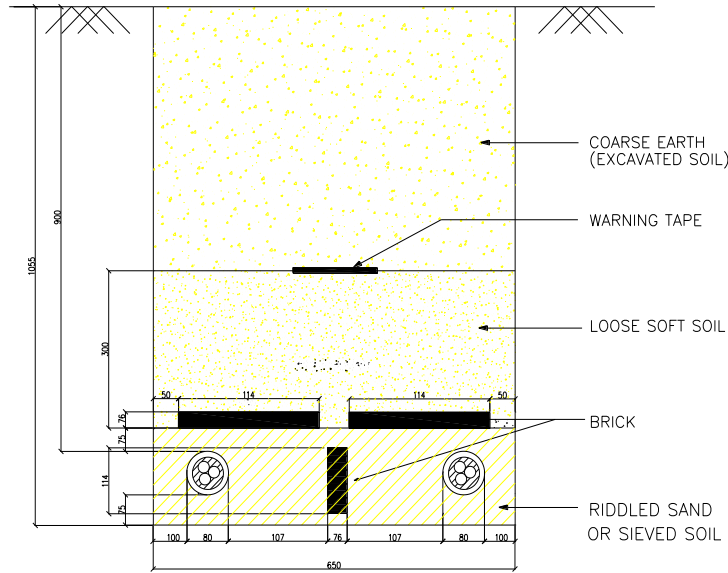


Figure 1.4 – 11kV Buried Cable for Double Circuit

TECHNICAL SPECIFICATION FOR CABLE LAYING

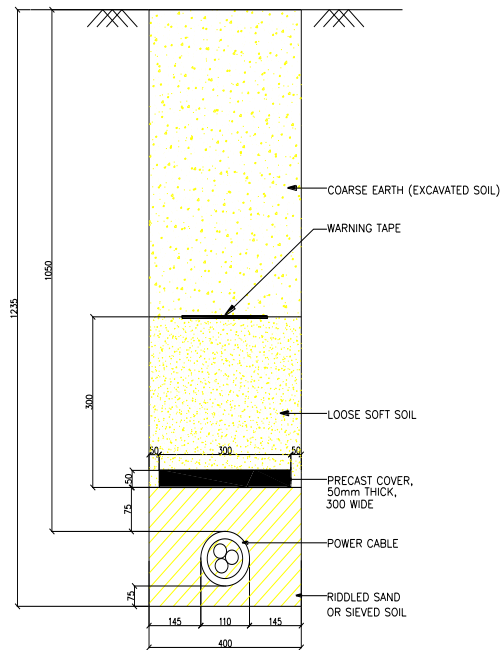


Figure 1.5 – 33kV Buried Cable for Single Circuit

TECHNICAL SPECIFICATION FOR CABLE LAYING

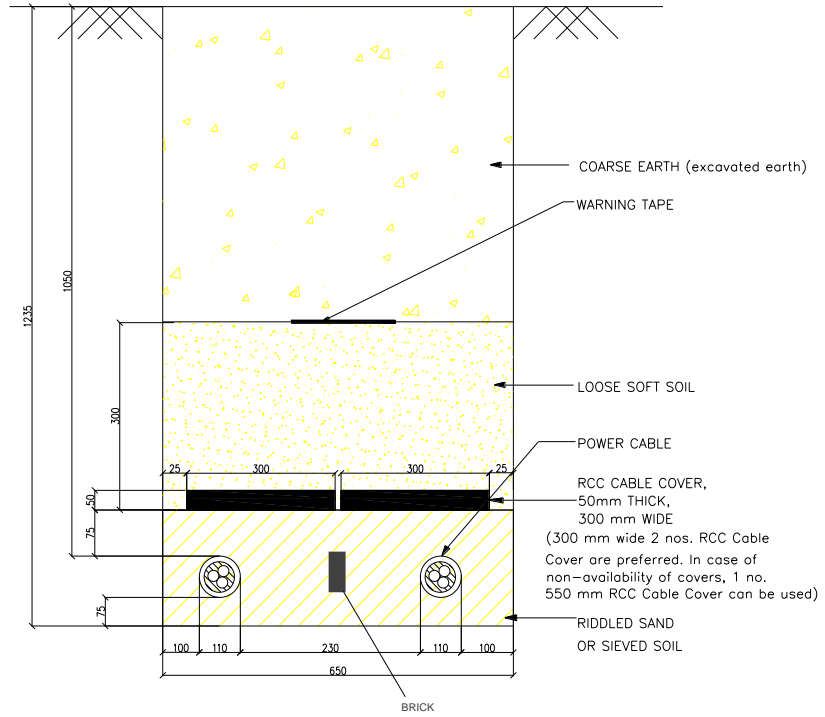


Figure 1.6 – 33kV Buried Cable for Double Circuit

TECHNICAL SPECIFICATION FOR CABLE LAYING

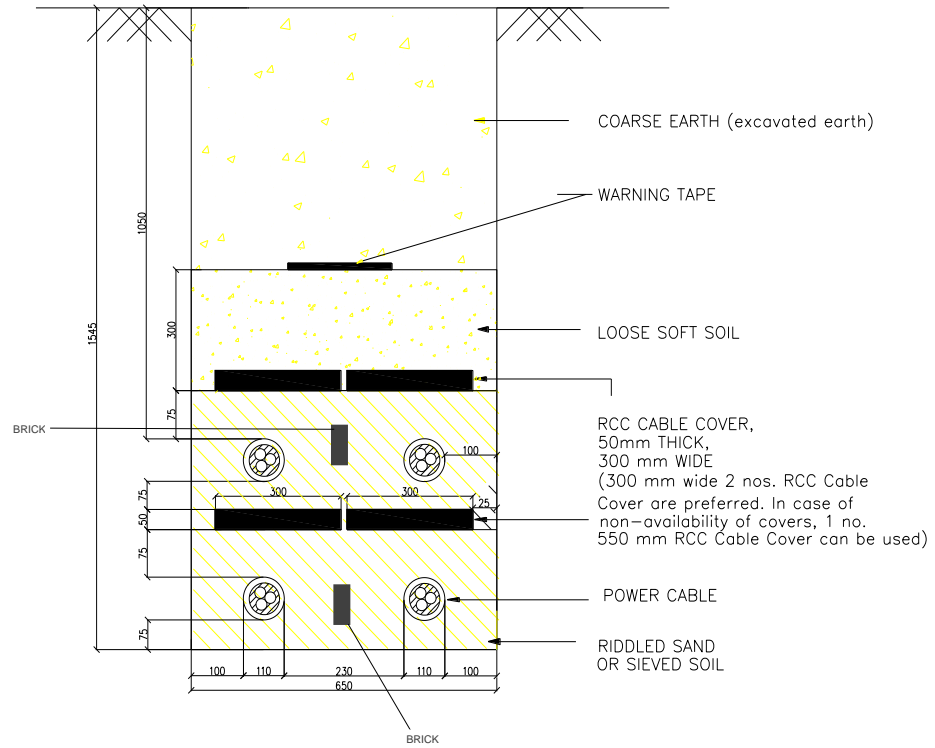


Figure 1.7 – 33kV Buried Cable Option-1 for Four Circuits

TECHNICAL SPECIFICATION FOR CABLE LAYING

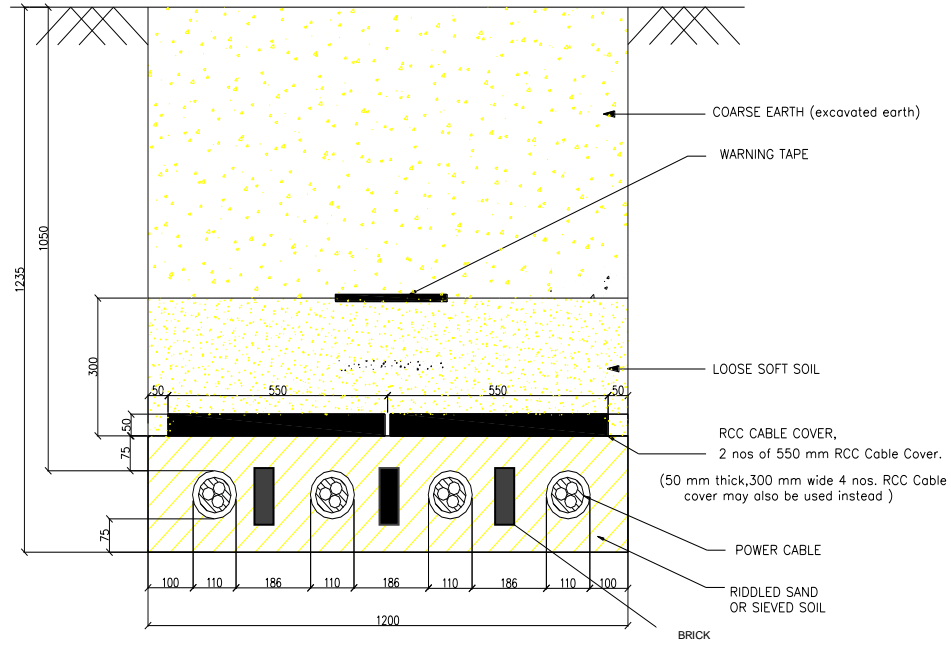


Figure 1.8 – 33kV Buried Cable Option-2 for Four Circuits

TECHNICAL SPECIFICATION FOR CABLE LAYING

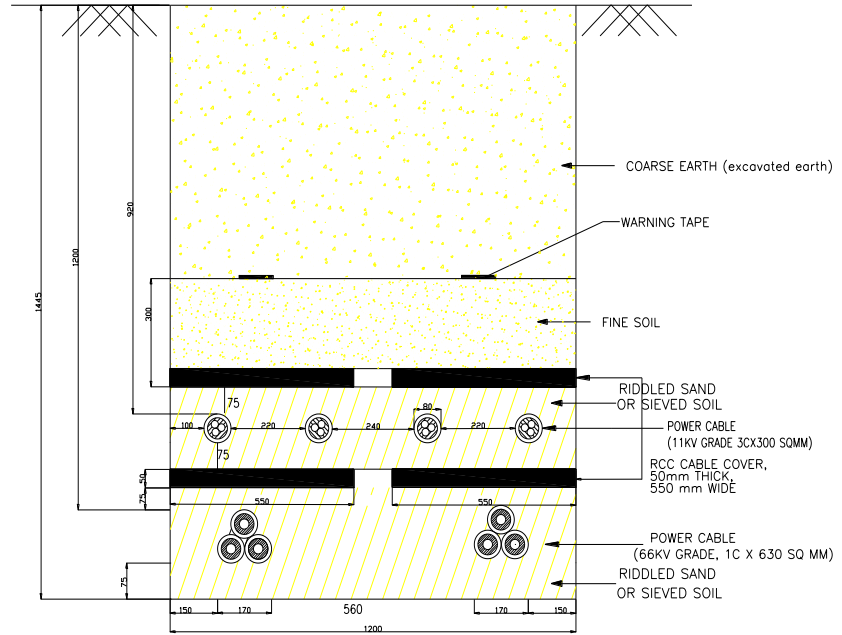


Figure 1.10 – 66kV Double Circuit and 11kV Circuits

TECHNICAL SPECIFICATION FOR CABLE LAYING**2.8 CABLE OVER BRIDGES**

On Bridges the cables are generally supported on HDPE cleats and clamped on steel supports at regular intervals. Approval from appropriate authorities (PWD/railways) as applicable shall be taken by contractor.

2.9 LAYING OF SINGLE CORE CABLES

- a) The single core cables shall be laid in trefoil formation. Single core cables can be laid individually in 200mm HDPE pipe in case of HDD only.
- b) For single core cables laid in trefoil formation, plastic cable ties shall be used at interval of 1.0 (one) meter throughout the cable length to maintain the trefoil arrangement.
- c) To prevent magnetic losses (eddy current and hysteresis losses), the base plate of the panels or the terminal box of the equipments, shall have aluminum plate. In case the entry into the building is through GI pipe; a “slit” in the GI pipe shall be necessary. Alternatively GI pipes may altogether be avoided and non-metallic pipes such as PVC or HDPE pipe shall be used. Concrete pipes having steel reinforcement (RCC pipe) are not to be used.

TECHNICAL SPECIFICATION FOR CABLE LAYING

2.10 EARTHING OF SINGLE CORE CABLES

- i) Single point bonded earthing shall be employed to prevent flow of induced circulating current in the armour and screen and consequential de-rating of cables for feeder less than 2.0 KM.
- ii) For feeder length more than 2 KM, cross bonding shall be provided.

2.11 GENERAL GUIDELINES FOR LAYING CABLES

- i) Laying of the cables and handling of the same shall be undertaken, at all times, by adequate staff suitably trained and supplied with all the necessary plant, equipment and tools.
- ii) The contractor shall be responsible for all the route survey, establishment of the position of the joints as per the site requirement and the drum lengths of cables to be laid. While carrying out the route survey the contractor shall take into account the obstacles on the route whether above or below ground. The cable shall be planned to be laid in an orderly formation, free from unnecessary bends and crossings
- iii) The contractor shall submit a drawing for the complete scheme showing the entire route, road crossings, location of joints and also the arrangement of cables to be laid. In case due to site exigencies, cables have to cross over within the trench, the same shall be shown in the drawing. For each and every job, this drawing shall be approved by BSES, prior to commencement of work.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- iv) Contractor shall arrange for all the material and manpower required for jointing and end termination. The Contractor shall provide pit, carry out excavation for creation of working space required for jointing by the jointer. The contractor shall carry out all civil works, structural work, clamping and earthing, so that the cables and accessories perform satisfactorily during the entire lifetime.
- v) The entry and exit of the cables into the building shall be through RCC or GI pipe except for single core cables, which shall be properly sealed and shall be duly supported as per the method and technique approved by BSES, so that the outer sheath of the cable does not get damaged at the entry and exit points. The sealing should be of adequate length so that it minimizes the risk of spreading of fire or ingress of water.

2.12 HANDLING AND STORAGE OF CABLE DRUMS

- i) The cable drums shall be transported upright, so that the weight is distributed on both the flanges. Under no circumstances the cable drum may be laid on its side. During transportation the drums must be properly secured. The cable drums should never be dropped from Lorry or a trailer, so as to prevent damage to the cable drum and also to the cable. Ramp may be used for unloading. The drums may be rolled over short distance, provided the correct direction of rolling as provided on the drum is observed. Alternatively, a mobile crane should be used for lifting and lowering the drum. A chain-pulley arrangement may also be used to lift the drums and deposit the same on ground if required.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- ii) In case the drums are to be stored prior to cable laying, they should be arranged in such a way to leave some space between them for air circulation. It is desirable that the drums stand on battens placed directly under the flanges. Overhead covering is not essential except in heavy rainfall areas or during monsoon. Cable should however be protected from direct rays of sun by leaving the battens on or by providing some form of sunshade. In no case the drums shall be stored in a flat position with flanges horizontal.
- iii) For transportation of the cable drums from storage site to work site, the drum should be mounted on a trailer or an open lorry and unloaded by mobile cranes.

2.13 PROCEDURE OF LAYING

- i) The ground over which the drum is positioned at site should be properly consolidated and jacks placed on both sides of the drum to make the pay-off arrangement stable. Suitable arrangement be made to stop the drum rotation, during cable laying preferably by square wooden poles kept temporarily pivoted over cable roller under the flanges which when required can be applied on the flange as a brake by personnel manning the drum.
- ii) The cable should always be paid off from the top of the drum. The drum must be positioned in such a way that the arrow on the drum points opposite to the direction of rotation marked on the drum.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- iii) It must be ensured that the cable is not dragged over sharp object or on the road surface, so as to avoid damage to the outer sheath of the cable.
- iv) The pulling method to be used shall be approved by BSES. Cable supplier's recommended maximum pulling tension shall not be exceeded.
- v) Rollers shall be placed at intervals and the cable shall be pulled over the rollers. The rollers shall be kept lubricated so that they rotate freely, minimize friction to the cable in motion. Rollers shall be positioned at the bends to minimize sidewall friction. The contractor shall ensure that PVC/HDPE sheath of cable is free from damage due to abrasion.
- vi) The cable should not be pulled out from the drum by lifting of the coil while the drum is lying flat on the flange. This leads to twisting of the armour and cores resulting in permanent damage to the cable.
- vii) To avoid ingress of moisture, it must be observed that the end capping of the cables is not damaged. Cut pieces of the cables must be capped immediately, before laying of the same is taken-up.

2.14 EXCAVATION OF THE TRENCHES

- i) The excavation of the trenches shall be commenced, with proper approvals from various authorities well in time.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- ii) Before opening of the section of the trench, the contractor shall satisfy himself that the line of the trench is clear of underground obstructions, by taking out trial pits on the line of the trench.
- iii) The exact location of each trench shall be approved on site by BSES. The trenches shall be kept as straight as possible and each trench shall be excavated to approved formation and dimensions. If necessary, the trenches shall be adequate shored by wooden planks and bracing to avoid trench cave-ins which would cause injury to the persons and also damage the cables laid.
- iv) The bottom of each trench shall be firm and of smooth contour. The contractor shall take reasonable precautions to prevent damage to the highway or ground surface from a slip or breaking away of the sides of the trench.
- v) The trench excavation and filling in shall be so executed that all walls, roads, sewers, drains, pipes, cables, structures, places and things shall be reasonably secured against risk of subsidence or injury and shall be carried out to the satisfaction of the authorities concerned. Should, however, a damage to an existing or other services be made, the Contractor will arrange and pay for any necessary repair, to make good the damages.
- vi) Where trenches pass from a footway to a roadway or at other positions where a change of level is necessary, the bottom of the trench shall rise or fall gradually. The rate of rise or fall shall be approved by BSES.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- vii) Contractor shall ensure that during excavation and until restoration has been completed, for reasonable access of persons and vehicles to property or places adjacent to the route.
- viii) When the excavation of the trenches has been accurately executed, the contractor shall inform BSES for approval. Laying of cables or building of structure shall not be started until the contractor has been advised by BSES to proceed with the work.

2.15 EXCAVATED MATERIAL

- i) The materials excavated from each trench shall be placed so as to prevent nuisance or damage to adjacent ditches, drains fences, gateways and other property or things. Excavated material shall be stacked so as to avoid undue interference with traffic.
- ii) Where, owing to traffic or for reasons of safety or other considerations, this is not permissible, the excavated material shall be removed from the site and returned for refilling the trench on completion of laying; surplus material shall be disposed off by the contractor at his own cost.

2.16 PIPES AND DUCTS

- i) Care shall be taken to make the bend of the pipes or duct lines as easy as practicable and in no case of radius less than 3 meters. Where approved, split pipes may be used on bends, the pipes being fitted round the cable after laying.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- ii) All road crossings shall be ducted. This applies to present and future roads as indicated on the route plans. The pipes and the ducts shall be laid in an approved manner and shall be surrounded by 150 mm of PCC (1:2:4)
- iii) Ducts under the road shall be provided by the contractor, by non-disruptive method, if road cutting is not permitted by the concerned authorities Cable laying shall be done by Horizontal Direct drilling method (HDD).
- iv) The cables shall be suitably protected at entry and exit from the pipes, so that the outer sheath does not come in contact with the edges of the pipes / ducts. The pipes and ducts shall have slope so that the seepage water can drain through the small opening provided on the lower side of the pipe sealing.
- v) The pipes and ducts shall be secured to the base at both ends and at regular interval, throughout the length, so that at no point the ducts or pipes get suspended over the threaded cable, and damage the same, thus defeating the very purpose of providing the pipe / duct.
- vi) At all road crossings at least one spare duct / pipe shall be provided for future use. The pipe shall be thoroughly cleaned of obstructions. A draw wire or rope shall be left in each pipe to facilitate the drawing in of the cables. The duct end shall be sealed temporarily to prevent the entry of foreign matter. End caps and permanent markers shall be placed flush with footpath / roadways at both the ends. The pipes

TECHNICAL SPECIFICATION FOR CABLE LAYING

and ducts shall be cleaned again immediately before the cables are drawn in.

- vii) The internal diameter of the pipe / duct should be such that the cables occupy only 40% of the area of the pipe / duct to avoid de-rating.

3. JOINTING OF CABLES

3.1 TYPES OF ACCESSORIES

- i) Straight Through / Transition Joints - These Joints are used for connecting two cables in the run.
- ii) Termination or sealing end – This is generally used to connect a cable to switchgear terminals, H.T. pillars, transformer boxes and OH lines etc. GIS End termination should be used wherever required.

3.2 REQUIREMENTS OF CABLE JOINTS

- i) Resistance of the jointed conductor should be equal to or less than resistance of the conductor of the same length.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- ii) Connector & lug should have a mechanical strength should be comparable to that of the conductor.
- iii) Thickness of built up insulation should be equal to or more than thickness of insulation of cable.
- iv) The Joint should provide proper mechanical protection to the insulated cores against damage by impact.
- v) The joints should ensure the continuity of metallic sheath or armour.
- vi) Proper stress control shall be provided to eliminate occurrences of high electrical stresses at screen cut points and over crimped connector.
- vii) The Joints shall be provided with an outermost layer resistant to corrosion by chemical effect

For joints of screened cables, following additional features must be considered

- i) Electric stress relief at termination of screen
- ii) Ionization and corona discharge

Besides the above requirement, cable joints should be simple and compact. It should require minimum time for jointing. It should be mechanically strong to

TECHNICAL SPECIFICATION FOR CABLE LAYING

withstand dynamic stresses due to short circuit current and impacts. The joints should further be resistant to corrosion and other chemical effects.

3.3 PREPARATION BEFORE JOINTING

A proper joint position should be selected for jointing. The joint pit should be of sufficient dimensions as to allow jointers to work. Sides of the pit should be well covered with tarpaulin sheets to prevent loose earth from falling. When jointing cables in water logged ground or under monsoon conditions, sump hole should be excavated at one end of the joint pit in such a position so that the accumulating water can be pumped out or baled out without causing interference to the jointing operation. The jointing as far as possible is to be carried out inside a tent. Before proceeding for jointing, on the existing cable, it is very essential to identify the cable to be jointed. For jointing of high tension cables, the cable should be made dead and earthed before commencement of the jointing. This should be confirmed by spiking method.

Cleanliness is the most important factor in all jointing work. All tools should be clean and dry at the time of the jointing process. Cleanliness while handling the insulation is very important. Any contamination of the insulation by dust or moisture is detrimental to the joint. In case of paper cables, the cable seals should be examined for any damage or puncture. The paper insulation should then be tested for the presence of moisture. This is done by dipping the insulation paper in hot G-38 compound (110 Deg - 120 deg.C). Care should be taken not to touch the paper with hand. Paper should be held with a plier which

TECHNICAL SPECIFICATION FOR CABLE LAYING

should be slightly warm. If moisture is present in the sample, it will be detected easily by a bubbling or crackling sound. In case of faulty cable, if on test moisture is detected, then further test would have to be carried out to arrest moisture. The cables to be jointed should then be meggered to check the condition of the insulation and a further check of further continuity of cables and tracing out cables to be jointed is necessary. Number on cores represents the phases. But these should never be taken for granted. Crossing of the core should be avoided in a joint.

3.4 PROCESS OF JOINTING

The process of jointing mainly consist of

- i) Connecting conductors together
- ii) Replacing the machine applied insulation
- iii) Providing earth continuity
- iv) Providing mechanical protection

Conductor joints should satisfy the following basic requirements.

- i) Ensure conductivity of the conductor by proper crimping.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- ii) Leave a reasonably smooth finish and profile on the conductor joint so as to avoid under stress concentration.

4. BACK FILLING TRENCHES AND TEMPORARY REINSTATEMENT

- i) Filling in of trenches shall not be commenced until BSES has inspected and approved the cables and accessories at site. The inspection should be done on daily basis so that the trenches do not remain open unnecessarily, to avoid inconvenience to public.
- ii) Where cables routes are in public highways, footpaths, gardens etc., the method of reinstatement will be subject to approval by MCD. All costs incurred will be at the contractor's expenses.
- iii) The contractor shall be responsible for proper permanent reinstatement of the upper levels, which shall be carried out to the satisfaction of BSES and the MCD authorities concerned.
- iv) Before finally leaving site, permanent reinstatement shall be executed by the contractor to the approval of MCD and the property owners and all costs incurred shall be to the contractor's account.

TECHNICAL SPECIFICATION FOR CABLE LAYING

5. PERMANENT REINSTATEMENT OF PUBLIC ROAD, FOOT PATH ETC

- i) In public roads and footways the surfaces and foundations shall be temporarily reinstated by the contractor. After settlement, temporary reinstatement material shall be removed as necessary and the permanent reinstatement shall be carried out to the approval of the appropriate highway authority / MCD. Stone and pre-cast concrete paving kerbs and channels shall also be finally reinstated by the contractor.
- ii) Temporary reinstatement shall be maintained by the contractor until commencement of final reinstatement to ensure that the surface is always safe for the passage of pedestrians and vehicular traffic.

6. IDENTIFICATION

All cables shall be identified below the gland at each end, at joint position and at approved positions by means of bands engraved or punched with cable no. feeder name, size of cable, number of cores, phase colour etc. The bands shall be secured fastened in a permanent manner, and shall be made of material able to resist corrosion, dampness and mechanical damage.

TECHNICAL SPECIFICATION FOR CABLE LAYING**7. CABLE ROUTE MARKERS**

All cables routes shall have markers at suitable location with a gap not exceeding 30 meters. The route markers shall be approved design. Additional markers shall be provided at joint locations with approved markings.

8. CABLE SUPPORTS / CLAMPS

- i) The contractor shall supply and install all the supports, racks, trays, cleats, saddles, clips and other parts required to carry and secure the cables, without risk so that there is no undue mechanical load or stress due to weight of the cable at each end. Cleats, saddles and clips shall be of the design as approved by BSES. No cable shall be laid on the trench floor. They shall be run in a neat and orderly manner and the crossing of cables within the trench shall be avoided as far as possible. Where cable runs unavoidably cross, a suitable supporting arrangement shall be provided to maintain an adequate gap between the cables.
- ii) Every cable shall be supported at a point not more than 500 mm from its termination.

TECHNICAL SPECIFICATION FOR CABLE LAYING**9. INSTALLATION OF CABLES IN TUNNELS / BASEMENT / BELOW THE PANELS**

- i) The design of cable support for cables installed in air in cable tunnels, basements etc. shall consist of vertical steel members spaced at approved interval and secured to the walls, floors and ceilings as necessary by means of bolts either cemented in position or expanded into cored holes. Each vertical support shall have bolted to it a number of steel brackets spaced at the intervals and designed to support and retain trays constructed of galvanized sheet steel of adequate section to carry the weight of the cables, plus space for an additional quantity of future cables at least 25% by weight and dimensions in excess of the cables installed under the contract and an additional load of 100 kg at the extremity without distortion. The trays shall be designed with raised edges to retain the cables and shall incorporate an interlocking feature so as to prevent movement between supports.
- ii) The design and construction of all cable cleating and supporting arrangements shall suit the cable system design. The spacing of cable supports shall be approved by BSES.
- iii) Cable run on trays shall be neatly dressed and where not provided with cleats shall be secured by heavy gauge, type approved metal reinforced, clips or saddles. Not more than six cables shall be embraced by one clip.

TECHNICAL SPECIFICATION FOR CABLE LAYING

- iv) Mild steel of appropriate sections, duly painted in an approved manner, shall be used for fabrication of cable supports. The steel shall be free from blisters, scales, laminations or other defects. Before final painting, the steel sections shall be provided with double coat of red primer.

10. CABLE PROTECTION AT OVERHEAD TOWERS OR POLES

Where the cables terminate on overhead line poles or towers located outside substation compounds the contractor shall provide suitable cable supporting galvanized steel work attached to the pole or tower and comprising backboard, runners, sheet, steel cover of not less than 3.0mm thickness, stays, cable cleats, anti climbing guard and all incidental items to provide secure protection for the cables. Isolators and Lightning arrestor. The erection and steel structure required shall also be in scope of the contractor.

11. SUN SHADES

All cables shall be protected from direct solar radiation by ventilated sun shields as approved by BSES.

12. ROUTE PLAN

- i) Contractor should get updated the GIS map of BSES of route along with joints and other obstructions.
- ii) During the progress of the contract works the contractor shall record on a set of route plans and cross section drawings of an approved

TECHNICAL SPECIFICATION FOR CABLE LAYING

form, these details so that the same can be transferred on the GPS maps. Such particulars will allow an accurate reference to be made in the case of any fault or projected modification. These records shall show, amongst other data, both indoors and outdoors the exact position of every joint, cable end termination and also the particulars of the depth of the trench, the arrangement of the cables, with cable numbers and the position of all obstructions revealed during the course of excavations. These completed records shall be submitted to BSES within 15 days of completion of any particular route/feeder.

13. SITE FACILITIES TO BE MAINTAINED BY THE CONTRACTOR

- i) The contractor shall arrange for all the tools and tackles required for cable laying, jointing testing and commissioning as per this specification.
- ii) The contractor shall arrange illumination and Power supply so that the work can be carried out round the clock.
- iii) The contractor shall maintain functional dewatering pumping facility with suitable power supply so as to protect the cables and the joints from ingress of water due to rain or otherwise
- iv) The contractor shall make arrangement to provide suitable scaffolding arrangement to carry out the termination work
- v) The contractor shall carry out proper barricading of the dug cable route and the joint bays and shall take all necessary precautions to avoid any public hazard.

TECHNICAL SPECIFICATION FOR CABLE LAYING**14. TESTING**

Following tests are to be carried out during and after completion of Cable Laying:

- i) Testing of cable before jointing –Cable shall be tested for Insulation Resistance prior to laying by opening the end and resealing end properly.
- ii) Testing on complete Cable Installation –
 - a. Insulation resistance of each core shall be measured against all the other cores and the metal screen connected to earth.
 - b. The resistance of the conductor shall be measured.
 - c. High voltage – Very Low frequency (VLF) kit shall be used for high voltage testing of complete cables length. Testing voltage and duration shall be as per IEEE 400.2 standards.
 - d. Partial discharge test shall be carried on complete cable length.
 - e. Charging of Cable at No-Load at Nominal working voltage for 24 Hours.
 - f. After laying and before termination of cable a sheath test shall be conducted for 66KV Single core Cable as under:-

At both ends the cable shall be raised from ground. From the end graphite coat over the outer PVC jacket shall be removed with a piece of glass for a length of 300mm. A spiked steel rod with an eye for attaching a wire shall be driven into the ground and connected to a nearby water or hydrant pipe. Insulation resistance of PVC

TECHNICAL SPECIFICATION FOR CABLE LAYING

jacket shall be measured between the aluminum wire armour and the spike with a 500/1000V insulation tester. Measured resistance shall not be less than 2.5 mega ohm / KM. Thereafter 10KV DC shall be applied for one minute in the same way. After the test the armour shall be kept earthed to the steel spike for 15 minutes for discharging residual charge.

- g. Any other testing required to complete the job shall be performed as per IEC standards.

15. BARRICADING AND SAFETY REQUIREMENT

- a. Dimensions of barricading- Height- 2 mtr, Length- 1.5 mtr.
- b. There shall not be any gap in between two barricades.
- c. LED Bacon light shall be placed at 1st and every 4th barricade
- d. Name, painting, color, cleanliness etc. shall be done on regular basis.
- e. Vendor to ensure that traffic management shall not be excuse of work execution. The contactor shall not undertake loading and unloading at carriageways obstructing the free flow of vehicular traffic.
- f. Full height fence, barriers, barricades etc. shall be erected around the site in order to prevent the working area from the risk of accidents due to speedy vehicular movement. In same way barricades shall protect the road users from the danger due to construction equipment and temporary structures.
- g. The structure dimensions of the barricades , material and composition, its color scheme, BSES logo and details shall be in

TECHNICAL SPECIFICATION FOR CABLE LAYING

accordance with specification and drawing laid down in the tender documents.

- h. All the barricades shall be erected as per the design requirements of employer, numbered painted and shall be maintained in good condition. Barricading In-charge shall maintain barricade register at site.
- i. All barricades shall be easily seen in the dark/night time by the road users so that no vehicle hits the barricades. Night vision shall be ensured by affixing retro reflective strips of required size and shape at appropriate angle at bottom and middle portion of the barricades at a minimum gap of 1000 mm. In addition minimum one red light /red blinker and red beacon light shall be placed at the top of each barricade.
- j. No dust deposit is permitted at the front side of barricades.
- k. Cable drum shall be returnable and vendor shall take it back (by buy back process or as per PO agreement) from site at their own risk and cost.
- l. Once cable lying of a drum is completed, within two days, empty drum shall be removed from site.
- m. Trained traffic marshal with all PPE and traffic control light (Red and Green) shall be placed at site for 24x7 hours.
- n. During execution of job, any damage to other agency's properties shall be counted in vendor account and necessary action shall be taken by vendor to immediate recover, repair etc.

TECHNICAL SPECIFICATION FOR CABLE LAYING




- o. Excess earth shall be removed from site after back filling. Site to be cleared to avoid flowing of dust. Barricades to be removed from site within 24 hrs after completion of job.
- p. During non working hrs vendor to ensure presence of supervisor for controlling any event from locals.
- q. PPEs
 - a. Helmets
 - b. Mask
 - c. Jacket
 - d. Safety Shoes
 - e. First Aid Box etc.

Above mentioned PPEs shall be available at site 24x7. Zero tolerance on absence of PPEs to the working personnel. No excuse shall be acceptable in this regards.

- r. EPR/Scanning shall be done by vendor of whole the route and same shall be submitted to BYPL. This work shall be done by vendor before execution of job.
- s. Lifting of cable drums with hydraulic machine, pulling of cable from top end of drum with pulling machine (hydraulic winch) is mandatory.
- t. Violation on barricading guideline and safety norms, a fine of Rs.5000 /day shall be imposed. BYPL inspector/engineer in-charge shall be empowered to impose the above penalty.
- u. Artwork & Text to be printed on barricading sheet shall be approved by BYPL prior to start of work

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

TECHNICAL SPECIFICATION
FOR
EARTHING PRACTICE IN GRID SUBSTATION

PREPARED BY	REVIEWED BY	APPROVED BY	REV	0
 A.H	 G.S	 A.A	DATE	18/10/2017

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

INDEX TABLE

1.	SCOPE.....	3
2.	STANDARDS & CODES	3
3.	REQUIREMENT OF EARTHING.....	4
4.	SPECIFICATION OF EARTHING MATERIALS	5
5.	SIZES OF THE EARTHING MATERIALS FOR EQUIPMENT EARTHING	6
6.	TESTING AND INSPECTION.....	8
7.	DEVIATIONS	8
8.	DOCUMENTS SUBMISSION	9
9.	GUARANTEED TECHNICAL PARTICULARS.....	9
	ANNEXURE A1 : REFERENCE FAULT LEVEL	10
	ANNEXURE A2: REFERENCE DRAWINGS.....	11

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION**1. SCOPE**

This specification covers the guidelines of earthing at 66/11, 33/11, 66/33/11 kV Grid substation and the technical requirements of material required for earthing.

2. STANDARDS & CODES

2.1.	CEA guidelines	Technical standards for construction of electrical plants and electrical lines
2.2.		IE Rules of 1956
2.3.	IEEE Std 80	IEEE guide for safety in AC substation grounding
2.4.	CBIP :2006 – publication no. 229	Manual on substation layout
2.5.	IS 3043: 1987	Code of practice for earthing
2.6.	IS 2629 (1985)	Recommended practice for hot dip galvanizing of Iron & Steel
2.7.	IS 2633 (1986)	Method for testing uniformity of coating on zinc coated article
2.8.	IS 5358 (1969)	Specification for hot dip galvanized coating on fasteners
2.9.	IS 4759 (1996)	Specification of Hot dip zinc coatings on structural steel and other allied products
2.10.	IS 1239 (2004)	Steel tubes, tubular and other wrought steel fittings- specification
2.11.	IEC 62561-2	Requirements for conductors and earth electrodes
2.12.	IEC 62561-7	Requirements for earthing enhancing compounds
2.13.	UL 467	Standard for safety - Grounding and bonding equipment
2.14.		Handbook on Electrical Earthing (Ministry of Railways)

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

3. REQUIREMENT OF EARTHING

3.1.	Primary guidelines	<p>Following are primary guidelines for a good earthing system in a Grid substation:</p> <ol style="list-style-type: none"> The impedance to ground should be as low as possible. In general it should not exceed 0.5 ohm. The step and touch potentials shall be within safe limits. The contractor shall do the calculation for number of earthing rods being used in a substation for achieving the desired earth resistance.
3.2.	Earthing lead size	<ol style="list-style-type: none"> The actual size of earthing lead will depend on the maximum fault current which the earthing lead will be required to carry safely. Please refer Annexure A1 for HT fault level.
3.3.	Earthing type	<ol style="list-style-type: none"> Rod earthing shall be provided for the Grid substation. The size of the rod depends upon the current to be carried and the type of the soil. Soil resistivity testing will be carried out by vendor. The Earth Electrode should be embedded vertically. Wherever hard rock is encountered, the rod can be inclined at an angle of about 30deg to the horizontal as per clause 9.2.2 of IS 3043. The vertically driven rods shall be interconnected with each other using horizontal grid conductors.
3.4.	Earth Pit	<ol style="list-style-type: none"> As per clause 20.5.2 of IS 3043, the minimum distance between the vertical earth electrodes shall not be less than the length of rod. Minimum of 1m distance of earth pit from electrical equipment and structures shall be maintained. The earth pits shall be backfilled with earth enhancing material as per Drawing . Treated Earth pits shall be used where earth resistance value is getting over the prescribed value in specification i.e. 0.5 ohms.
3.5.	Horizontal Conductor	<ol style="list-style-type: none"> The entire earth rod driven in ground vertically shall be interconnected with earth grid conductors horizontally under the ground. The Horizontal conductors shall be laid 600 mm below FGL. Minimum earth coverage of 300 mm shall be provided between the Horizontal conductor and the bottom of trench/foundation/underground pipe at the crossing. Horizontal conductors around a building /switchyard fence shall be buried outside the boundary at a minimum distance of 2000 mm. Risers shall be provided 300mm above the ground level for equipment earthing. Two number earth pits shall be provided with riser for connection of transformer neutral. All the joints between rods flats shall be exothermic type for creating better electrical contact between two. Welding between rods to flat, flat to flat should be arc welding type. Wherever bolted connection is done, it shall be done through two bolts at each joint to ensure tightness and avoid loosening with passage of time.
3.6.	Equipment earthing	<ol style="list-style-type: none"> GI strips shall be used for the equipment earthing. Two separate and distinct earth connections shall be provided for earthing of electrical frameworks.

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

		<ul style="list-style-type: none"> c. The connection of GI strip with riser of earth mat shall be electric arc welding arrangement; connection of equipment with earthing end shall be double bolted arrangement. d. The transformer neutral shall be earthed with two independent grounding conductors connected to two separate earth pits. e. Fence within the earth grid shall be bonded to the plant earth system at regular interval not exceeding 10 meters. Fence gate shall be separately earthed with flexible connection to permit movement. f. Bolted connection shall be made only for earthing of equipment/devices and for some removable structures. The contact surfaces shall be thoroughly cleaned before connection to ensure good electrical contact. g. Cable armor shall be earthed at both ends for multi core cables. For single core cables, the earthing shall be at switchgear end only. h. Metallic stairs and hand rails shall be earthed as for columns. Additionally a 25x6 GI flat shall run the entire length of the stairs. The GI flat shall be welded to the stairs and hand rails at intervals of 1500 mm. i. The main earth conductor shall be securely fixed to the columns /walls/trays by welding /clamping at the intervals not exceeding 1500 mm. The earth conductors shall be interconnected between them and to the main earth grid through risers.
--	--	---

4. SPECIFICATION OF EARTHING MATERIALS

4.1.	GI earthing strip	<ul style="list-style-type: none"> a. Fully galvanized iron strips shall be used conforming to IS 2629. b. The zinc deposition shall not be less than 610gm/sqm of the galvanized surface area of the MS Earthing strips. c. The zinc coating used for the galvanization shall be of 9.99 % purity grade as per IS 209. d. All the galvanized material shall be checked for uniformity and weight as per IS. e. The standard length of galvanized iron earthing strip shall be minimum 7Mtrs.
4.2.	Vertical and Horizontal Earth Electrode	<ul style="list-style-type: none"> a. Copper clad steel rod driven in the earth vertically shall be a high tensile-low carbon steel rod of adequate diameter(as per the clause 6.0 of the specs) and 3 m length complying UL467, IEC62561-2 and IS 3043, molecularly bonded by 99.99% pure high conductivity copper on the outer surface with copper coating thickness 254 microns or more with sufficient amount of earth enhancement compound as per IEC 62561-7. b. Copper bonding must be UL/CPRI/ERDA certified. c. Rod shall be tested and certified from CPRI/ERDA for a short circuit current withstanding of desired value. d. There shall be following marking on the rod-Dimension Detail, product model no, Reference number of certification. e. It shall have high corrosion resistance and shall eliminate electrolytic action. f. The rod shall have thread profile at both the ends to ensure no copper is removed from the steel.

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

4.3.	Earth enhancing compound	<ul style="list-style-type: none"> a. It shall be as per IEC 62561-7. b. It shall be chemically inert to subsoil. c. It shall not pollute the environment. The RoHS certificate shall be provided from any NABL accredited lab for not having any toxic chemical in earth enhance material. d. It shall provide a stable environment in terms of physical and chemical properties and exhibit low resistivity. e. The earthing enhancing compound shall not be corrosive to the earth electrodes being used. f. It shall be maintenance free. g. The earth enhancement material shall be supplied in sealed, moisture proof bags. These bags shall be marked with manufacturer's name or trade name, quantity, batch no. & date of manufacturer, resistivity, Buyer's name, PO no. & date. h. As per IEEE 80-2013 clause 14.5 d, grounding material shall be tested and certified for resistivity less than 0.12 Ω-m.
------	--------------------------	---

5. SIZES OF THE EARTHING MATERIALS FOR EQUIPMENT EARTHING

S.No.	Title	Material	Sizes of the earthing	Type	UOM	No of Lead
	Main Earthing Grid					
5.1	Vertical Rods	Cu Bonded Rods	25	Rod	mm (dia)	
5.2	Above Ground risers	GI	50x10	Flat	sqmm	2
5.3	Horizontal Rods	Cu Bonded Rods	25	Rod	mm (dia)	
5.4	Treated Earth Pit	Cu Bonded Rods	25	Rod	mm (dia)	
	Power Transformers					
5.5	Frame	GI	75X10	Flat	sqmm	2
5.6	Marshalling Box	GI	50X6	Flat	sqmm	2
5.7	Radiator	GI	50X6	Flat	sqmm	2
5.8	Neutral	GI	65x10	Flat	sqmm	2
5.9	Fan	GI		As per sizes mentioned for fans		
	11 KV System					
5.10	11 KV Switchgear	GI	50X6	Flat	sqmm	2

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

5.11	11 KV Bus Duct	GI	50X6	Flat	sqmm	2
5.12	11 KV Cable Box	GI	50X6	Flat	sqmm	2
	415 V System					
5.13	ACDB	GI	50X6	Flat	sqmm	2
5.14	Station Trafo Frame	GI	50X6	Flat	sqmm	2
	DC System					
5.15	Battery Charger	GI	50X6	Flat	sqmm	2
5.16	DCDB	GI	50X6	Flat	sqmm	2
	Other Electrical Items					
5.17	Three phase receptacles, welding outlet	GI	25x3	Flat	sqmm	1
5.18	C&R Panel	GI	50X6	Flat	sqmm	2
5.19	Push Button	GI	8	Wire	swg	1
5.20	Cable Trays(one run along the tray section)	GI	50X6	Flat	sqmm	1
	Other Non Electrical Items					
5.21	Railway Tracks	GI	25x6	Flat	sqmm	At suitable Points
5.22	Metallic noncurrent carrying structures like stair case	GI	25x6	Flat	sqmm	1
5.23	Columns, Structures	GI	50X6	Flat	sqmm	2
5.24	Steel pipe racks	GI	25x6	Flat	sqmm	1
5.25	Fence/Gate	GI	50X6	Flat	sqmm	At suitable Points(2 min)
5.26	Hand Rail	GI	8	Wire	swg	1

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

6. TESTING AND INSPECTION

6.1.	Earthing materials	<ul style="list-style-type: none"> a. The purchaser reserves the right to inspect the material at the time of tests. All tests shall be performed in the presence of BYPL representative. The bidder shall give intimation in advance to witness the test. b. Acceptance test for GI earthing strips – Tests for Visual examination, dimensional verification and galvanization shall be witnessed at the time of inspection. c. Acceptance test of Earth enhancement compound – Tests for leaching, sulphur determination, corrosion and resistivity shall be done as per IEC 62561-7 d. Type test reports of the earthing materials from CPRI/ERDA/Equivalent lab shall be submitted. The bidder shall submit UL-467/CPRI/ERDA test reports for copper clad steel rod.
6.2.	Measurement of Earth resistance	<ul style="list-style-type: none"> a. After the completion of work ground resistance of each installation shall be measured by BYPL/Contractor. b. The measurement of resistance shall be witnessed and signed by representative of BYPL as well as the contractor. The test certificates shall be generated for each installation clearly indicating the details of the transformer, name of the substation, location, district, serial no. of testing equipment and name of testing engineer. c. The desire ground resistance shall be measured after interconnection of earth pits is completed. The value of earth resistance shall not be more than 0.5 ohm. d. In case where this value exceeds 0.5 ohms, the earthing design shall be redesigned. The pit location, earth electrode, soil treatment, earth conductor, GI strip used shall be checked whether properly used at site. If not, these shall be changed as per the redesigned plan.

7. DEVIATIONS

7.1.	Deviation	<p>Deviations from this Specification shall be stated in writing with the tender by reference to the Specification clause/GTP/Drawing and a description of the alternative offer. In absence of such a statement, it will be assumed that the bidder complies fully with this specification. No deviation will be acceptable post order.</p>
------	-----------	--

TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

8. DOCUMENTS SUBMISSION

The bidder has to submit the following documents along with bid:-

8.1.	Complete earthing calculation
8.2.	Complete product catalogue, Manual and calibration certificate of the equipment
8.3.	Type test reports
8.4.	Deviation Sheet (if any)

9. GUARANTEED TECHNICAL PARTICULARS

S. No	Parameter	BYPL Requirement	Vendor Data
9.1	Rod to rod welding	Exothermic	
9.2	Zinc deposition of GI earthing Strip	610gm/sqm	
9.3	Length of GI Strip	7m (Minimum)	
9.4	Diameter of Cu clad Rod	25 mm	
9.5	UL/CPRI/ERDA Certification of Cu Bonding	Test certificate to be provided	
9.6	Cu bonding	250 Micron	
9.7	Length of Copper bonded rod	3 m	
9.8	Purity of Copper	99.99%	
9.9	Short circuit withstand test of Rod	31.5kA	
9.10	Marking on the rod-Dimension Detail, product model no, Reference number of certification	Sample Required	
9.11	ROHS Certificate from NABL accredited lab for not having toxic chemical in earth enhance material	Test certificate to be provided	
9.12	Resistivity of earth enhancing material	0.12 ohm-m(Max)	


TECHNICAL SPECIFICATION FOR EARTHING PRACTICE IN GRID SUBSTATION

9.13	Exothermic welding material	IEEE 837 Complied	
9.14	Make of Steel	SAIL/ESSAR/TATA	

ANNEXURE A1 : REFERENCE FAULT LEVEL

Voltage Level(kV)	Design Fault Level
66/11	31.5 KA
33/11	25 KA


ANNEXURE A2: REFERENCE DRAWINGS

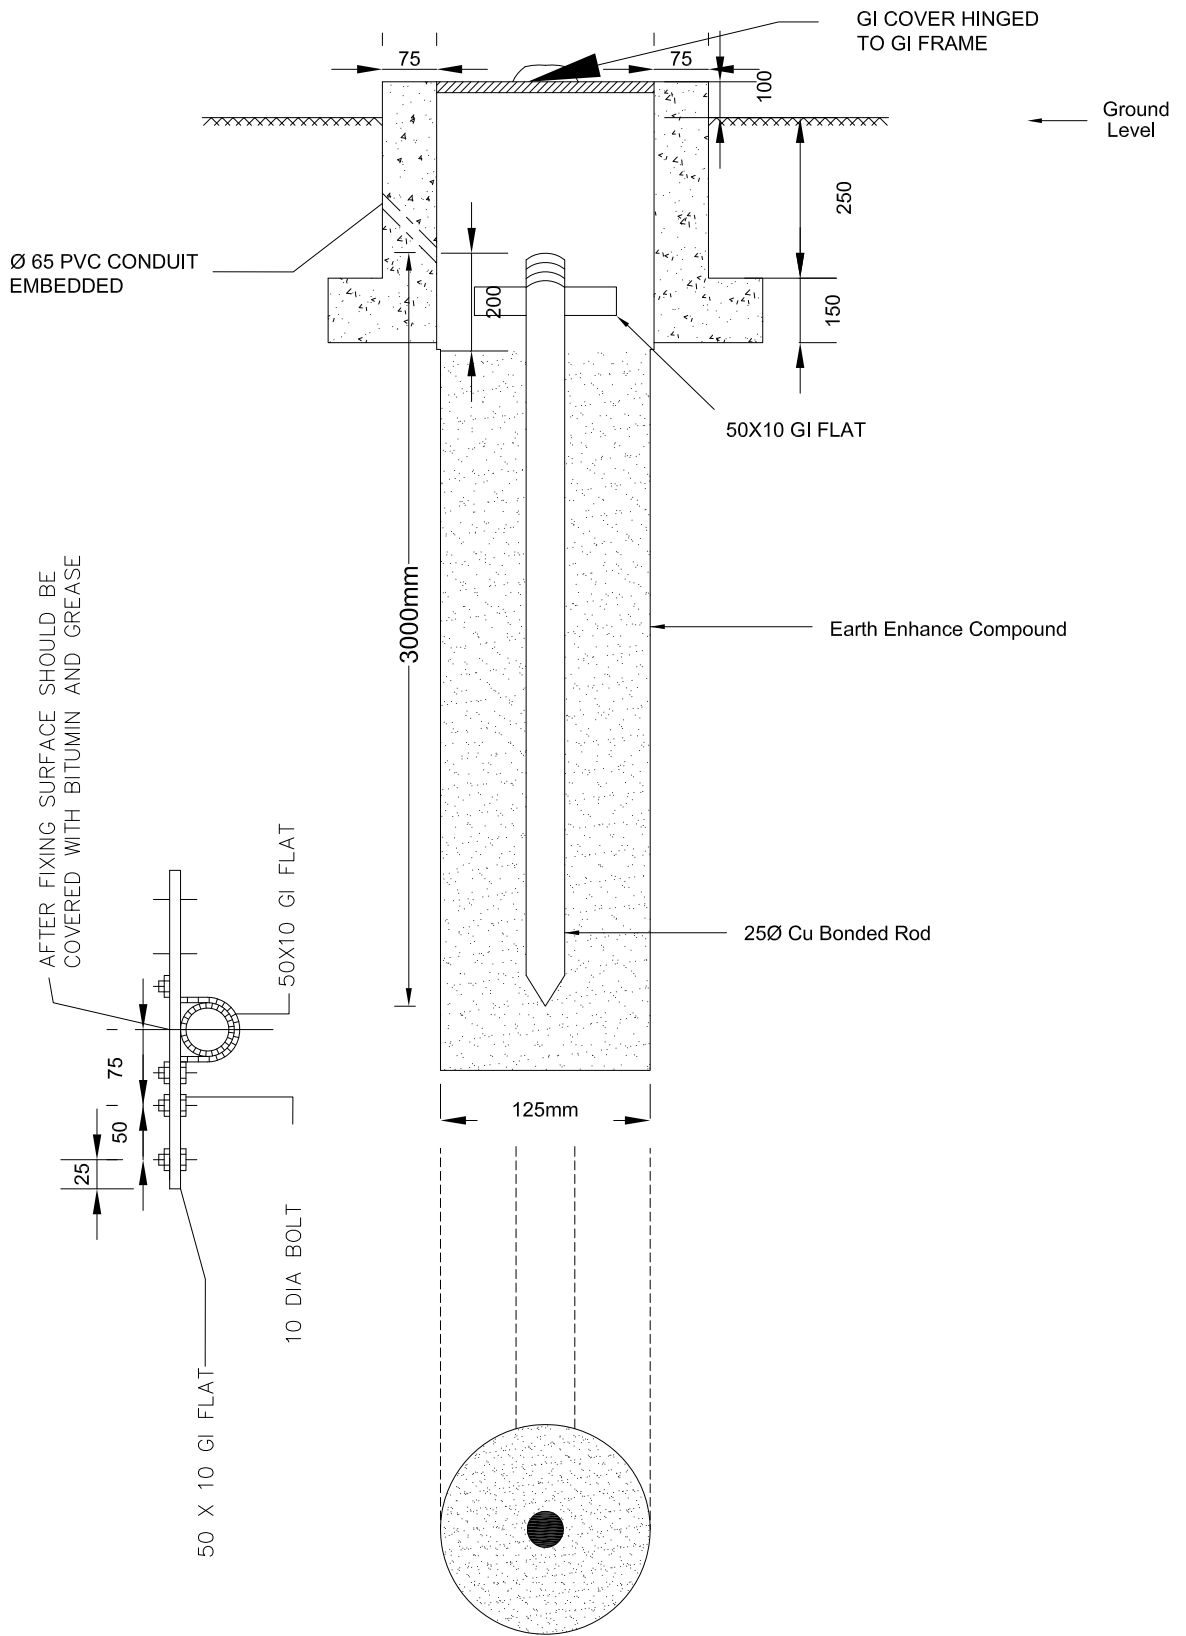

DRAWN	A.H
CHECKED	G.S
APPD.	A.A
DATE	17.10.17
SCALE	NTS


TITLE: -
EARTH ELECTRODE

BSES
BSES Yamuna Power Limited

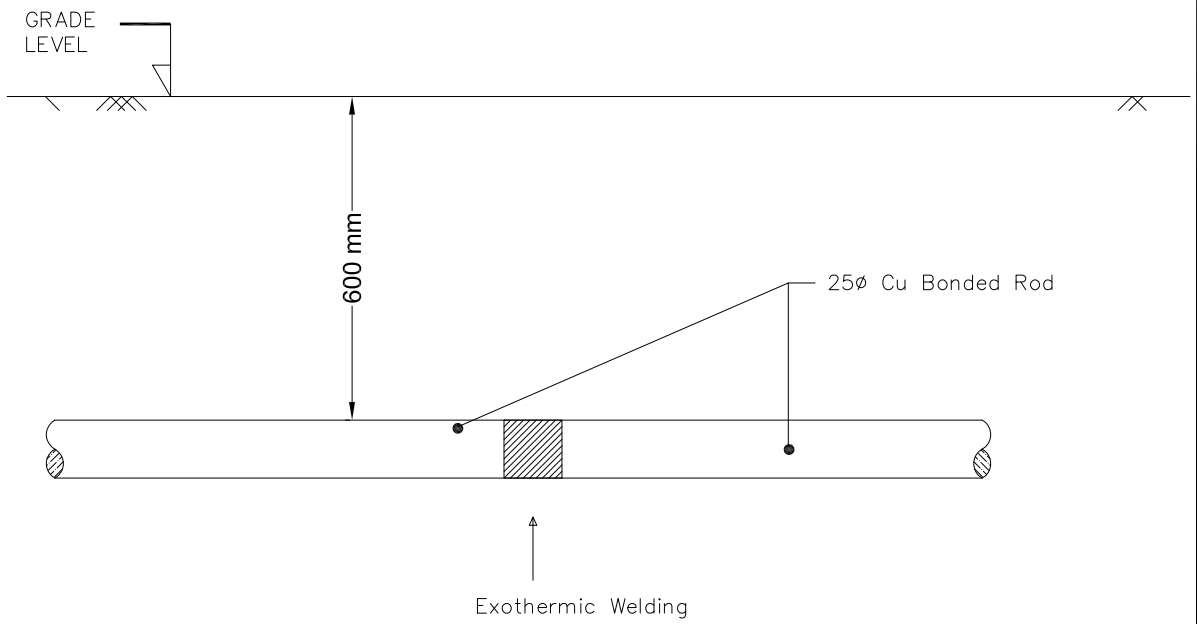



DRAWN	A.H	TITLE: - LAP JOINT BETWEEN RODS
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

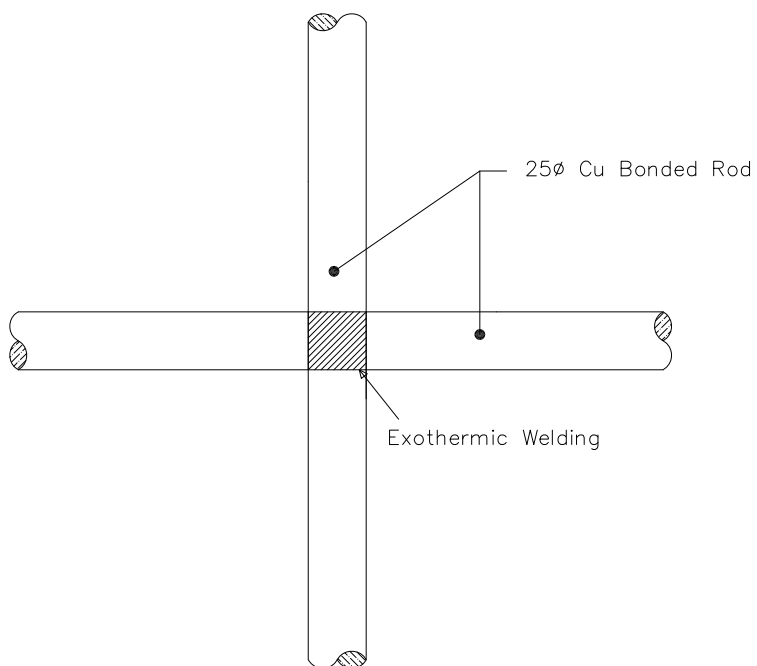

DRAWN	A.H	TITLE: - CROSS JOINT BETWEEN RODS
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

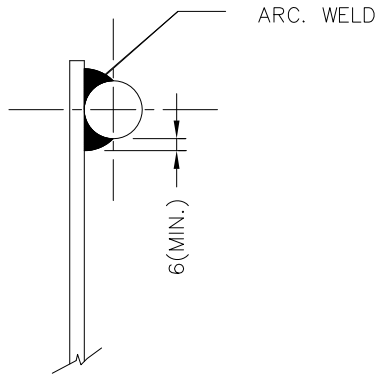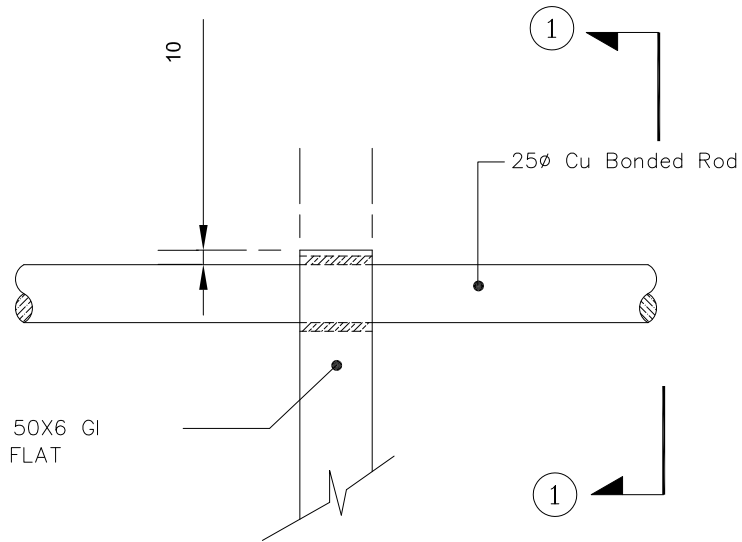


SECTION - ①

DRAWN	A.H	TITLE: - CROSS JOINT BETWEEN ROD AND GI FLATS
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

GRADE LEVEL

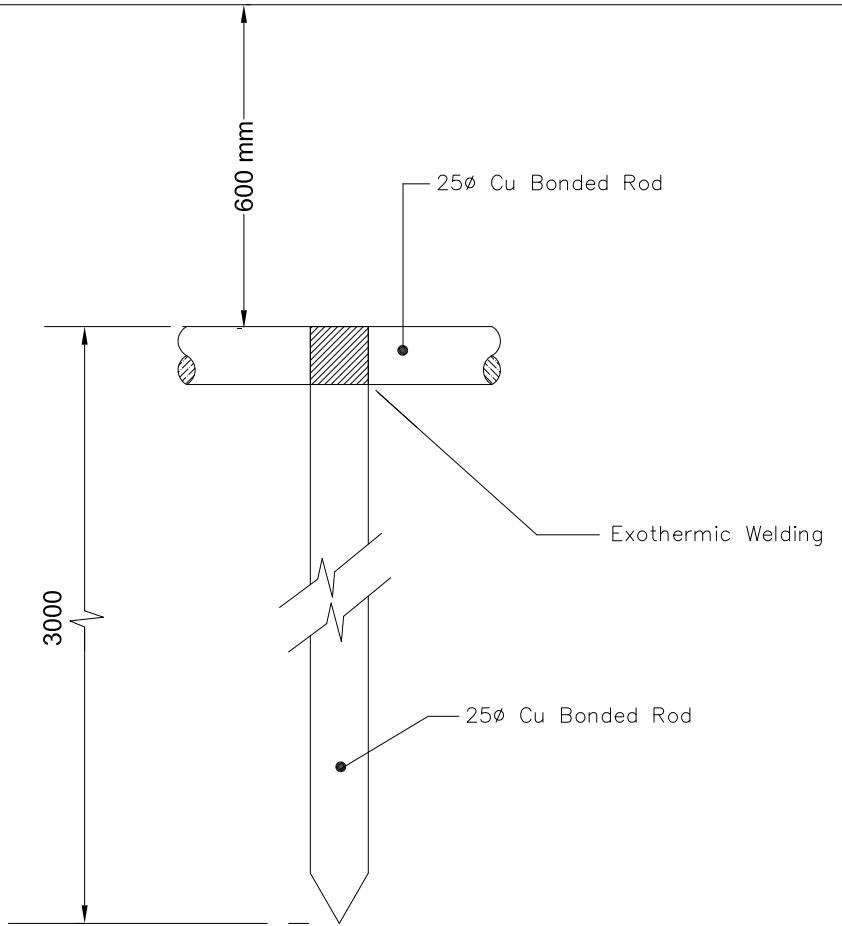


DRAWN	A.H
CHECKED	G.S
APPD.	A.A
DATE	17.10.17
SCALE	NTS

TITLE: -

EARTH ELECTRODE

BSES
BSES Yamuna Power Limited

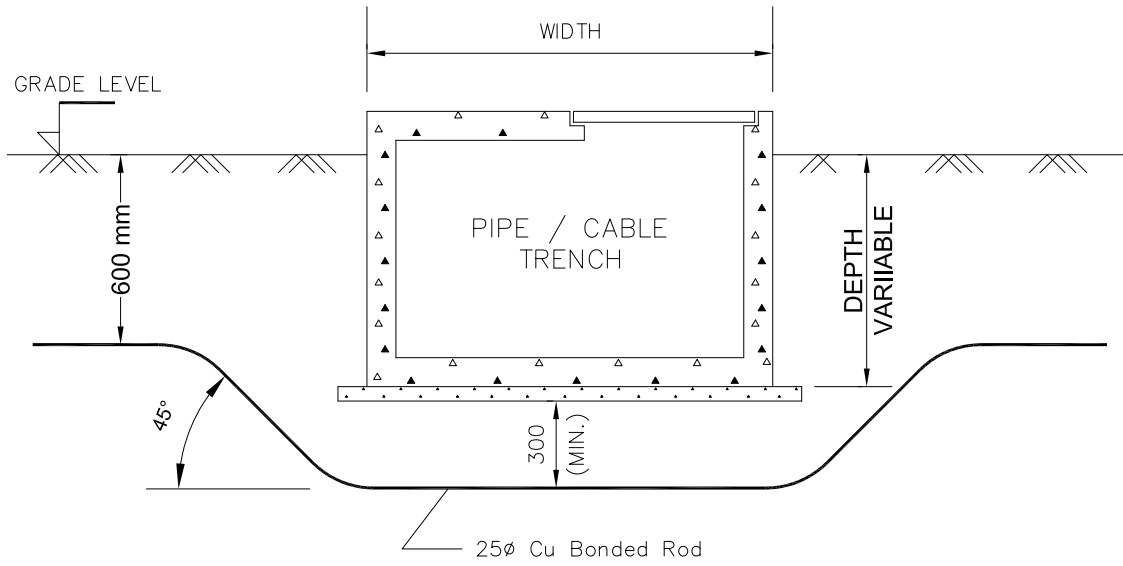



DRAWN	A.H
CHECKED	G.S
APPD.	A.A
DATE	17.10.17
SCALE	NTS


TITLE: -

TRENCH CROSSING OF
EARTHING CONDUCTOR

BSES
BSES Yamuna Power Limited

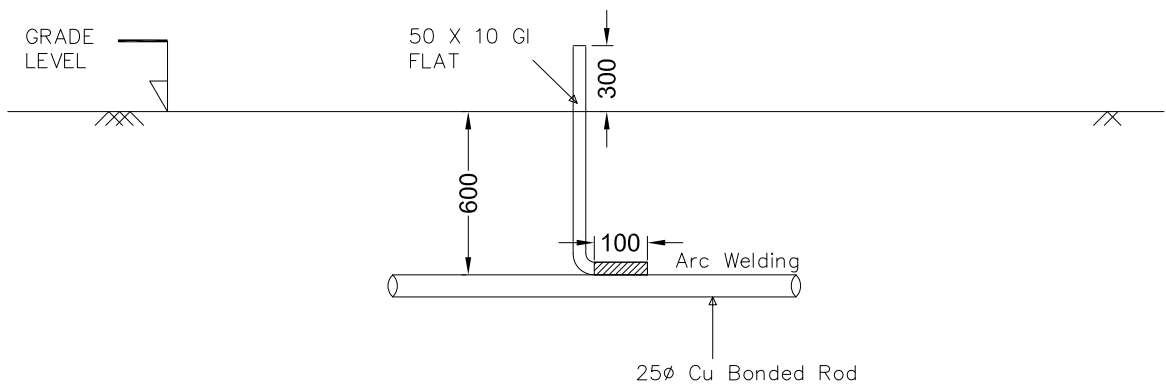

DRAWN	A.H	TITLE:— EARTH RISER DRAWING	
CHECKED	G.S		
APPD.	A.A		
DATE	17.10.17		
SCALE	NTS		


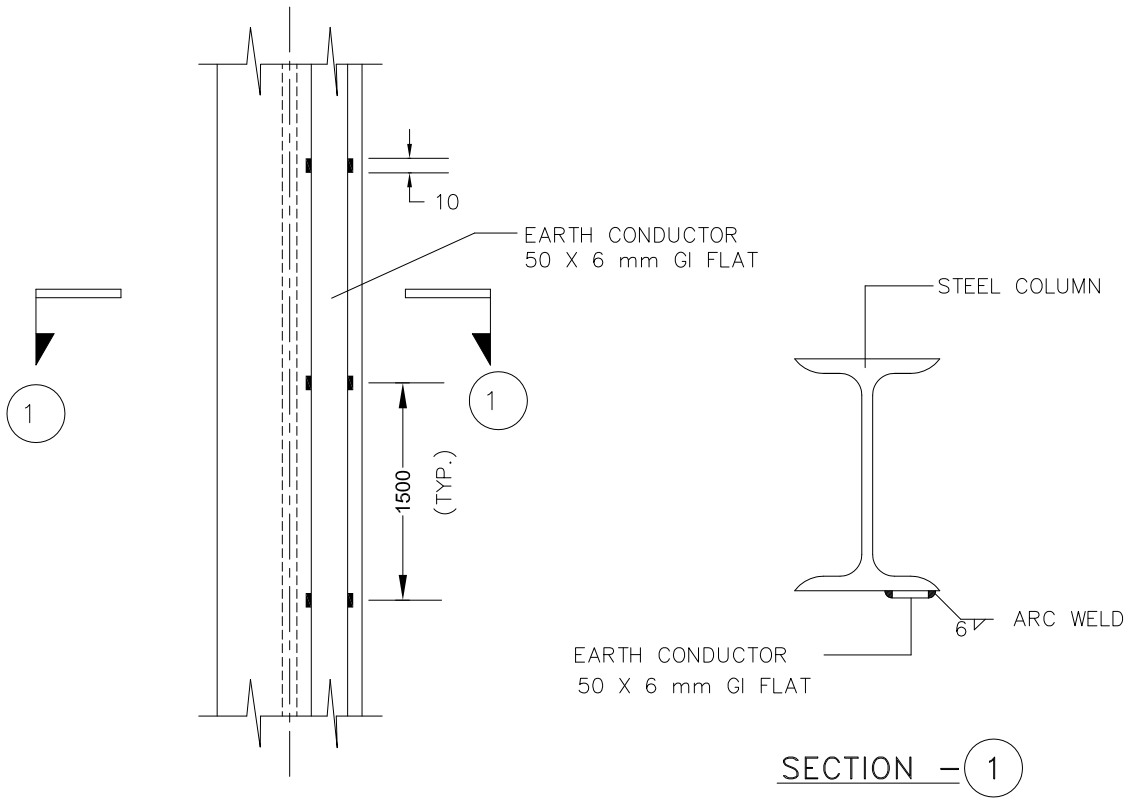


DRAWN	A.H
CHECKED	G.S
APPD.	A.A
DATE	17.10.17
SCALE	NTS

TITLE: -

EARTHING CONDUCTOR ALONG
STEEL COLUMN



BSES
BSES Yamuna Power Limited

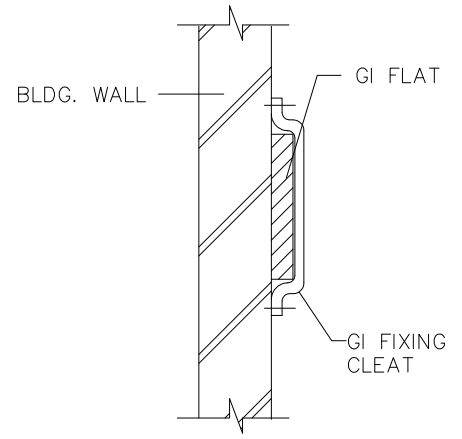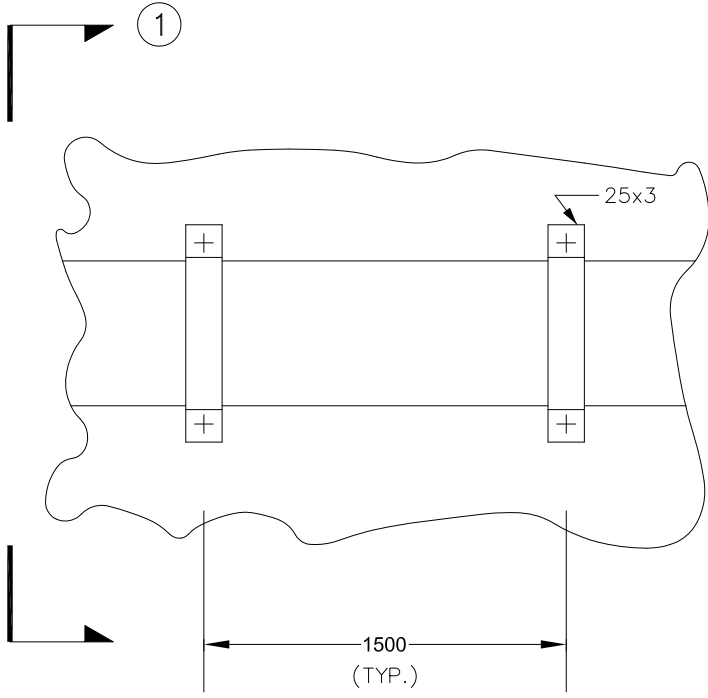

SECTION - ①

DRAWN	A.H	TITLE: - EARTHING CONDUCTOR ALONG BUILDING WALL
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	



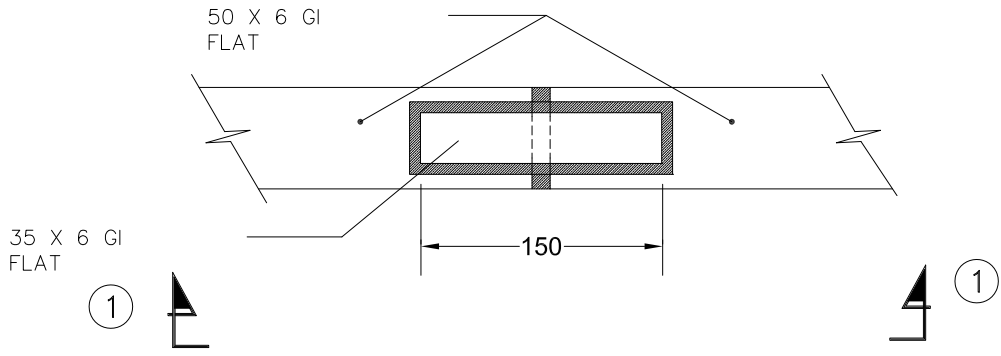



SECTION - ①

DRAWN	A.H
CHECKED	G.S
APPD.	A.A
DATE	17.10.17
SCALE	NTS

TITLE:-

BUTT JOINT BETWEEN GI FLATS





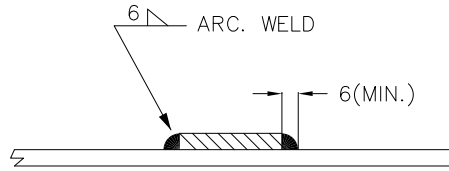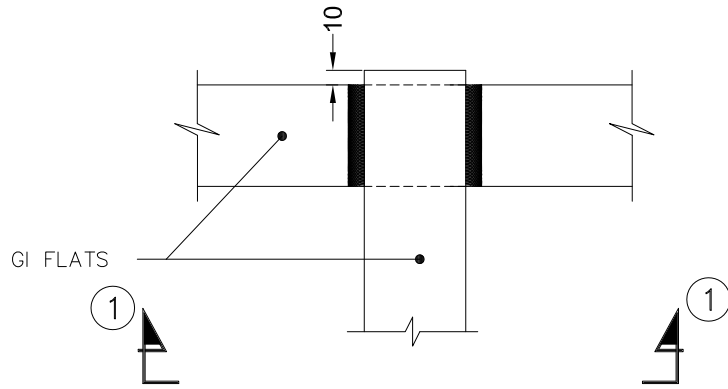

SECTION - ①

DRAWN	A.H	TITLE: - CROSS JOINT BETWEEN GI FLATS
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	



BSES
BSES Yamuna Power Limited

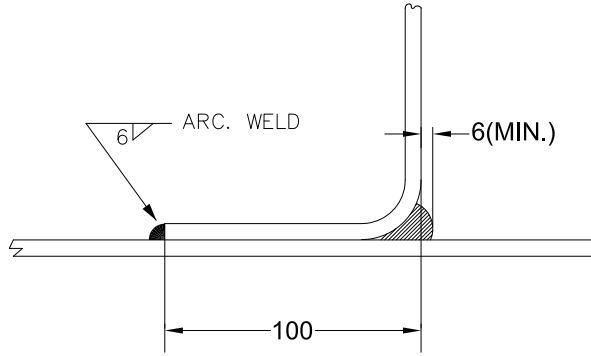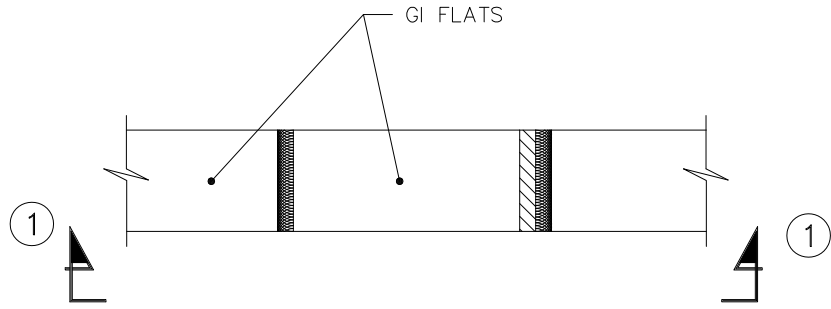

SECTION - ①

DRAWN	A.H	TITLE: - ANGULAR JOINT BETWEEN GI FLATS
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	


BSES
BSES Yamuna Power Limited

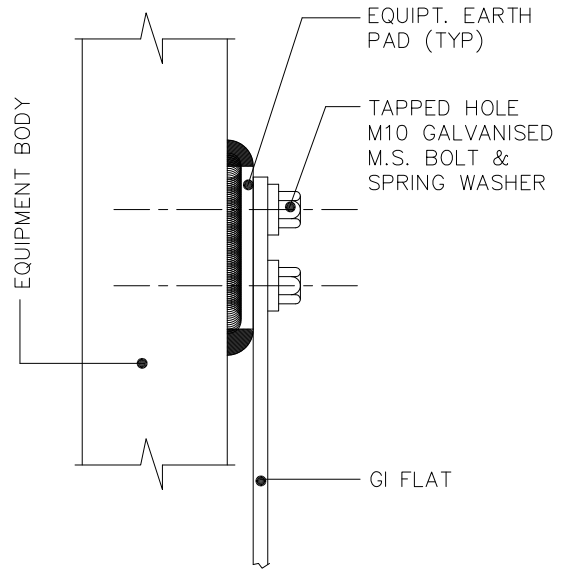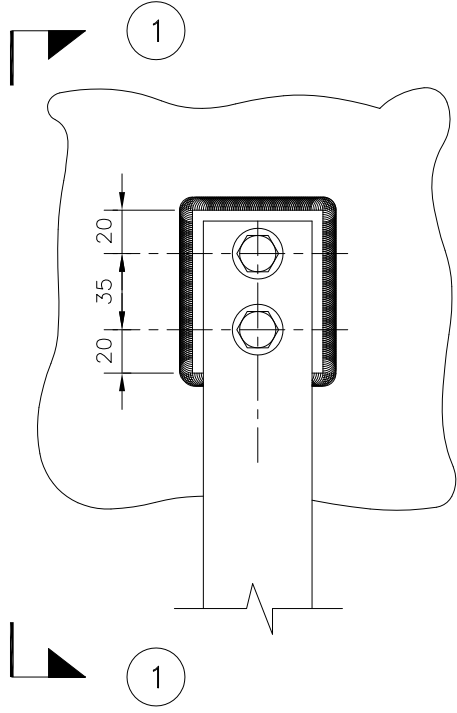

SECTION - ① - ①


DRAWN	A.H	TITLE: - EQUIPMENT EARTHING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	



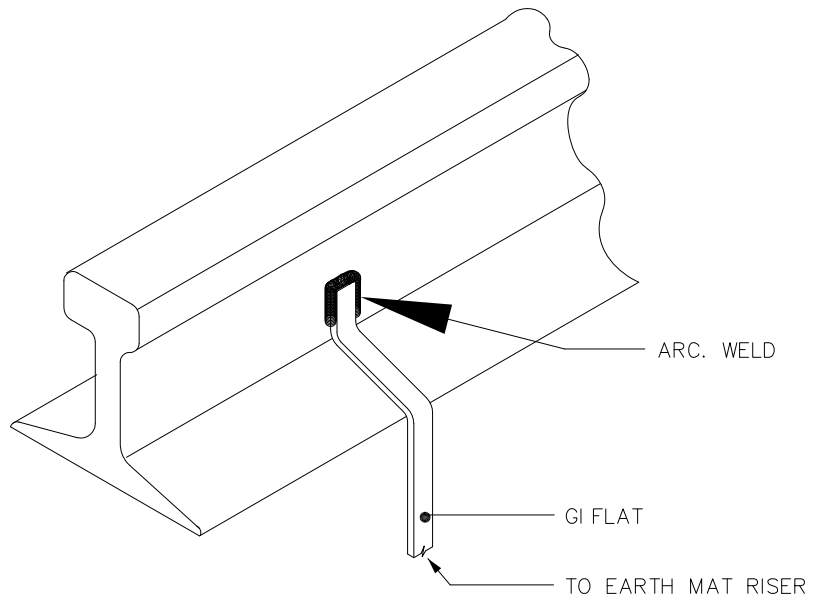


DRAWN	A.H	TITLE: - RAIL EARTHING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

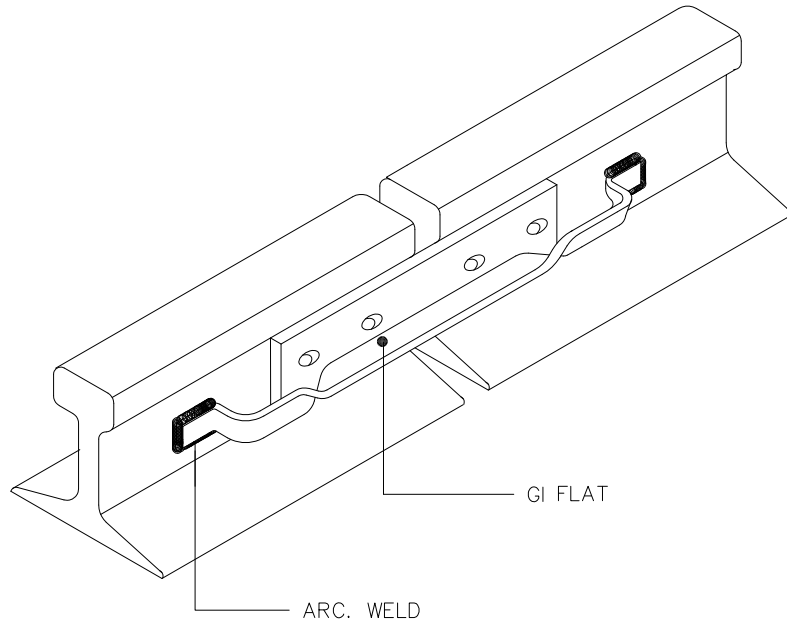

DRAWN	A.H	TITLE: - RAIL BONDING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	


BSES
BSES Yamuna Power Limited

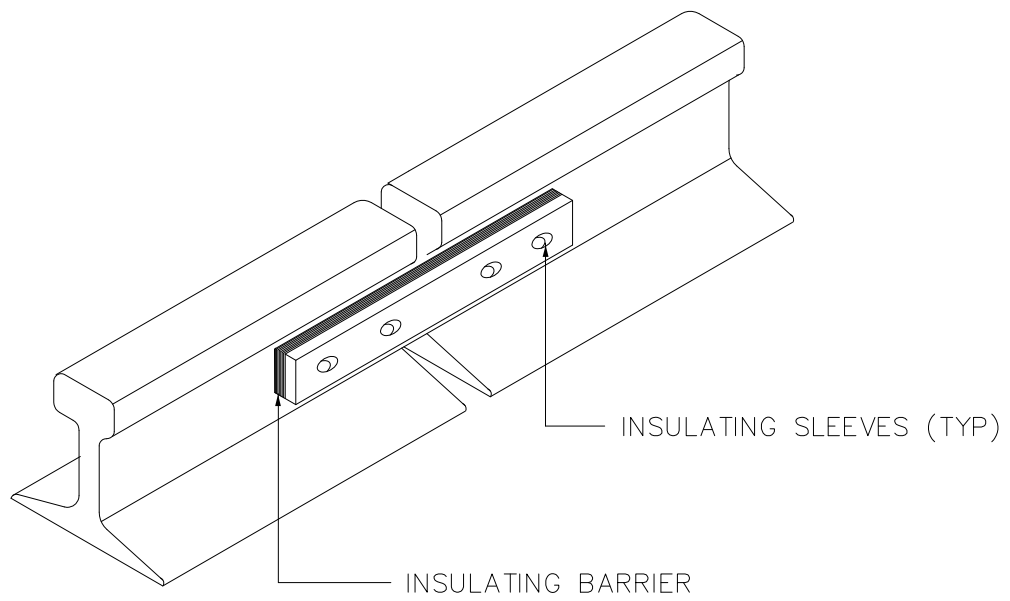

Note: Such installation shall be provided at points where the rail track leaves the earth grid (typically at the plant boundary)


DRAWN	A.H	TITLE: - RAIL SECTIONS LEAVING THE EARTH MAT
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

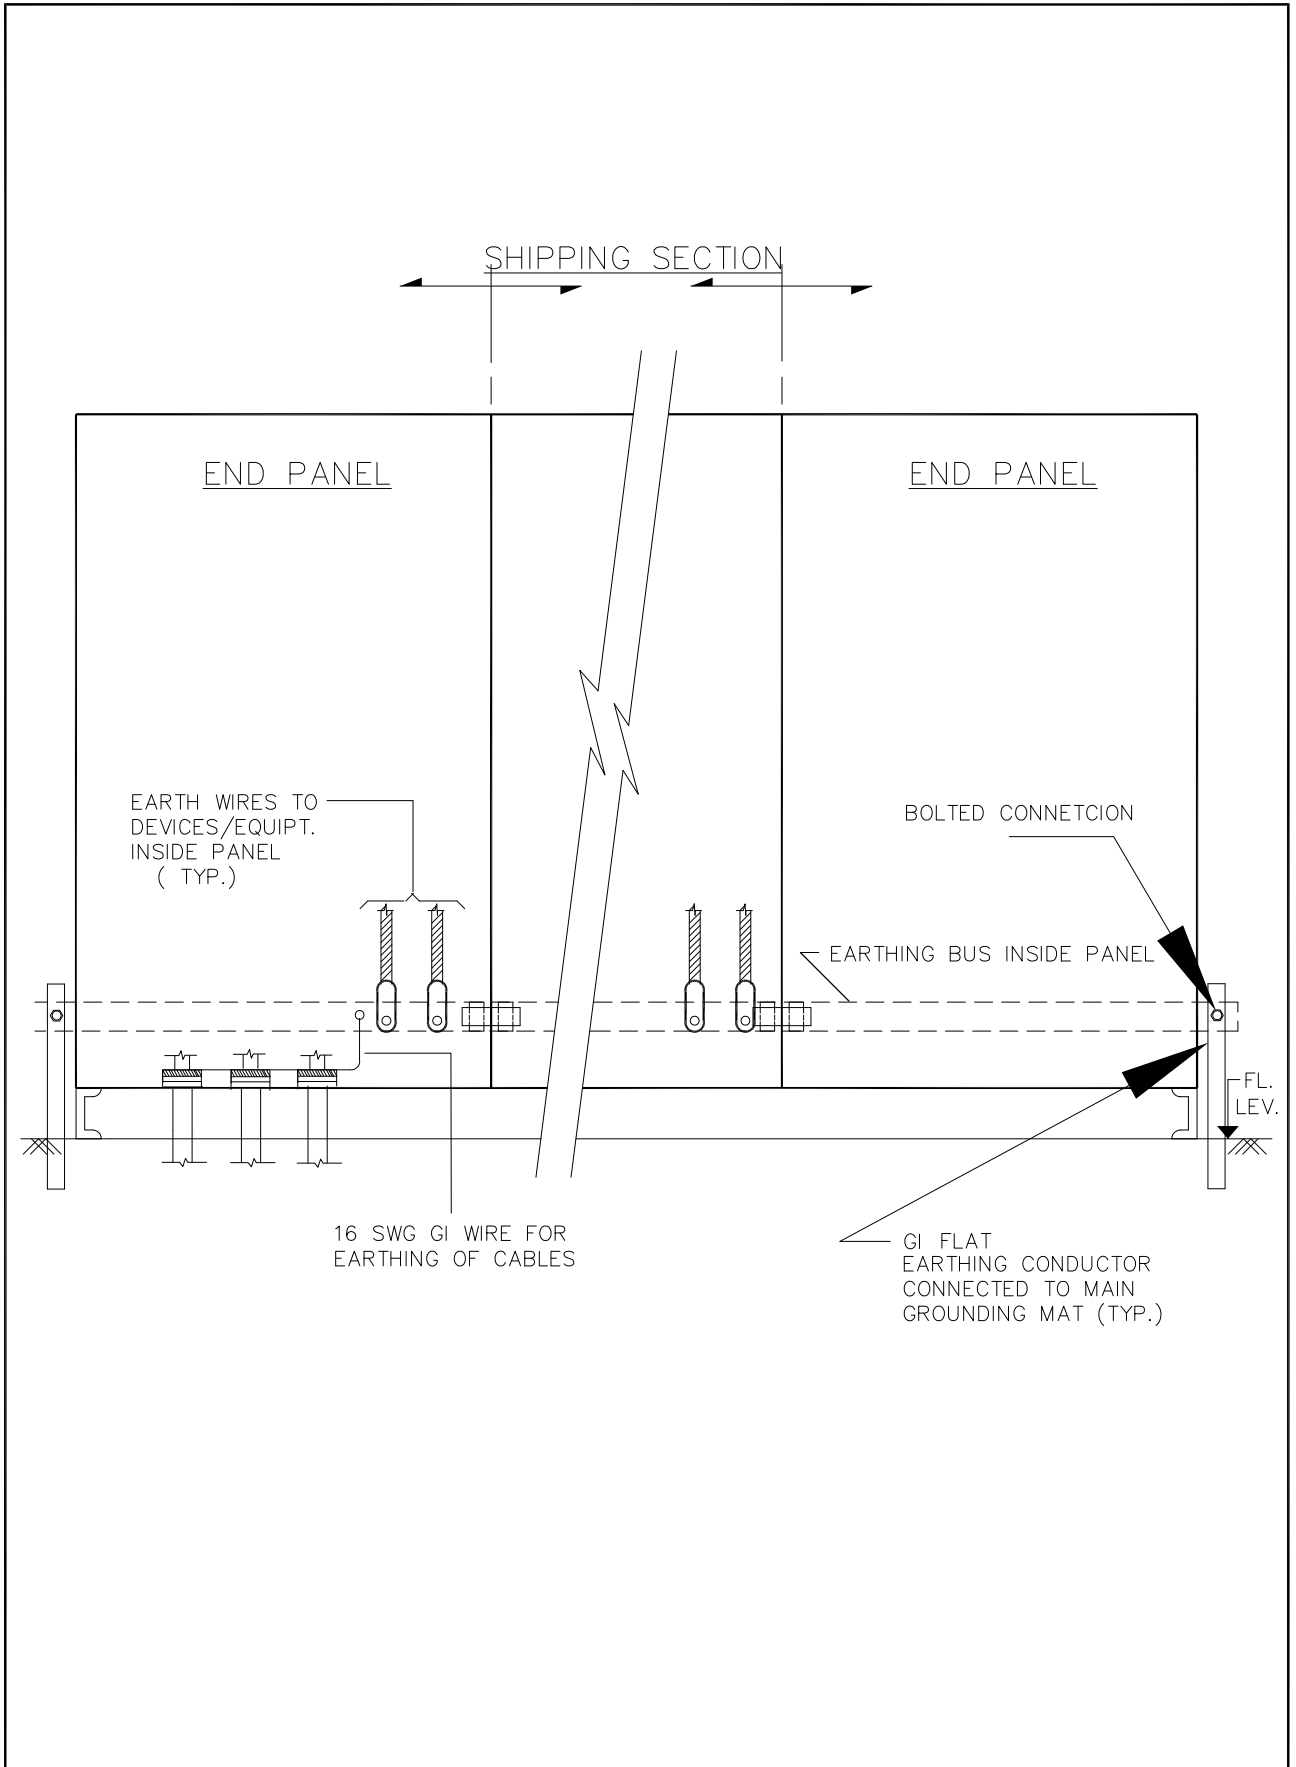


DRAWN	A.H	TITLE: - EARTHING OF MCC, SWITCHGEAR
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	



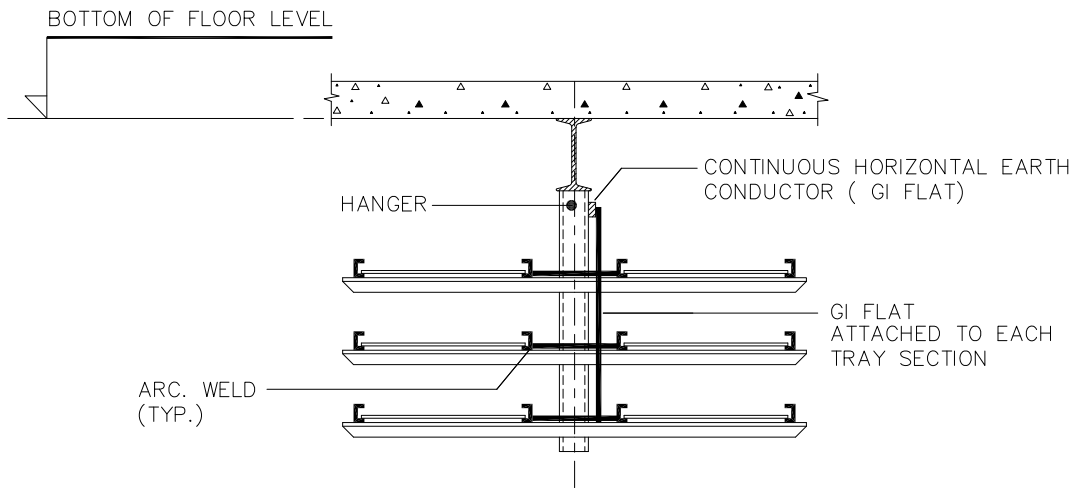


OVERHEAD CABLE TRAY EARTHING

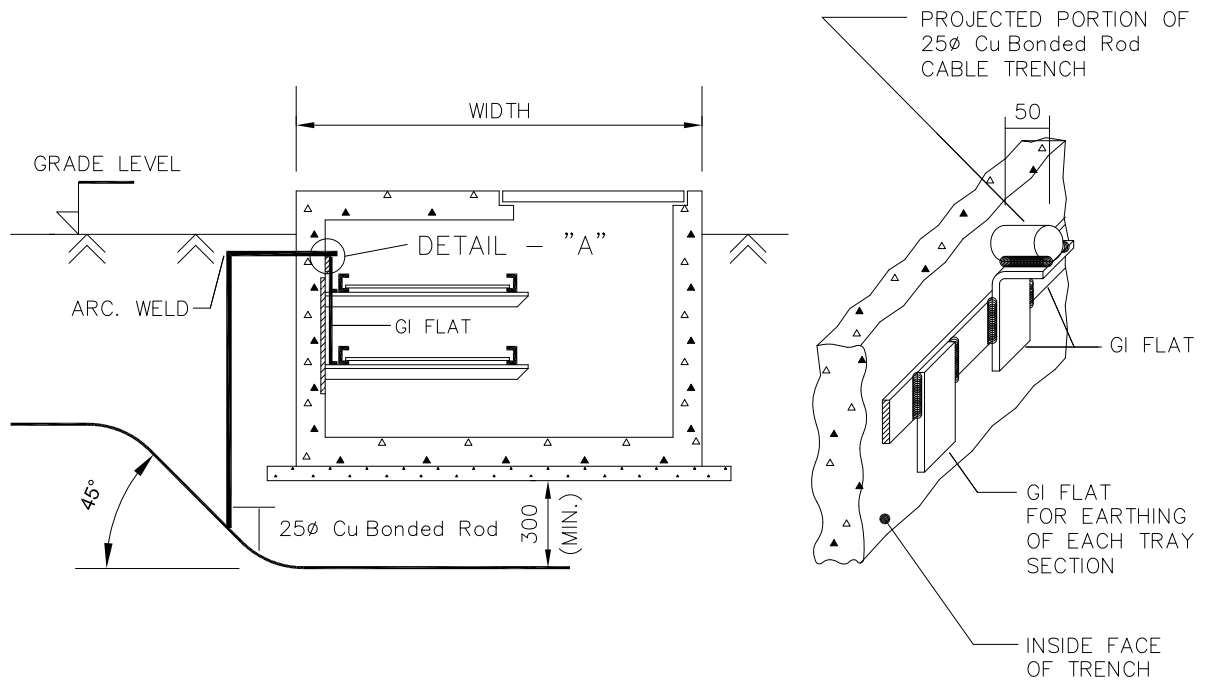


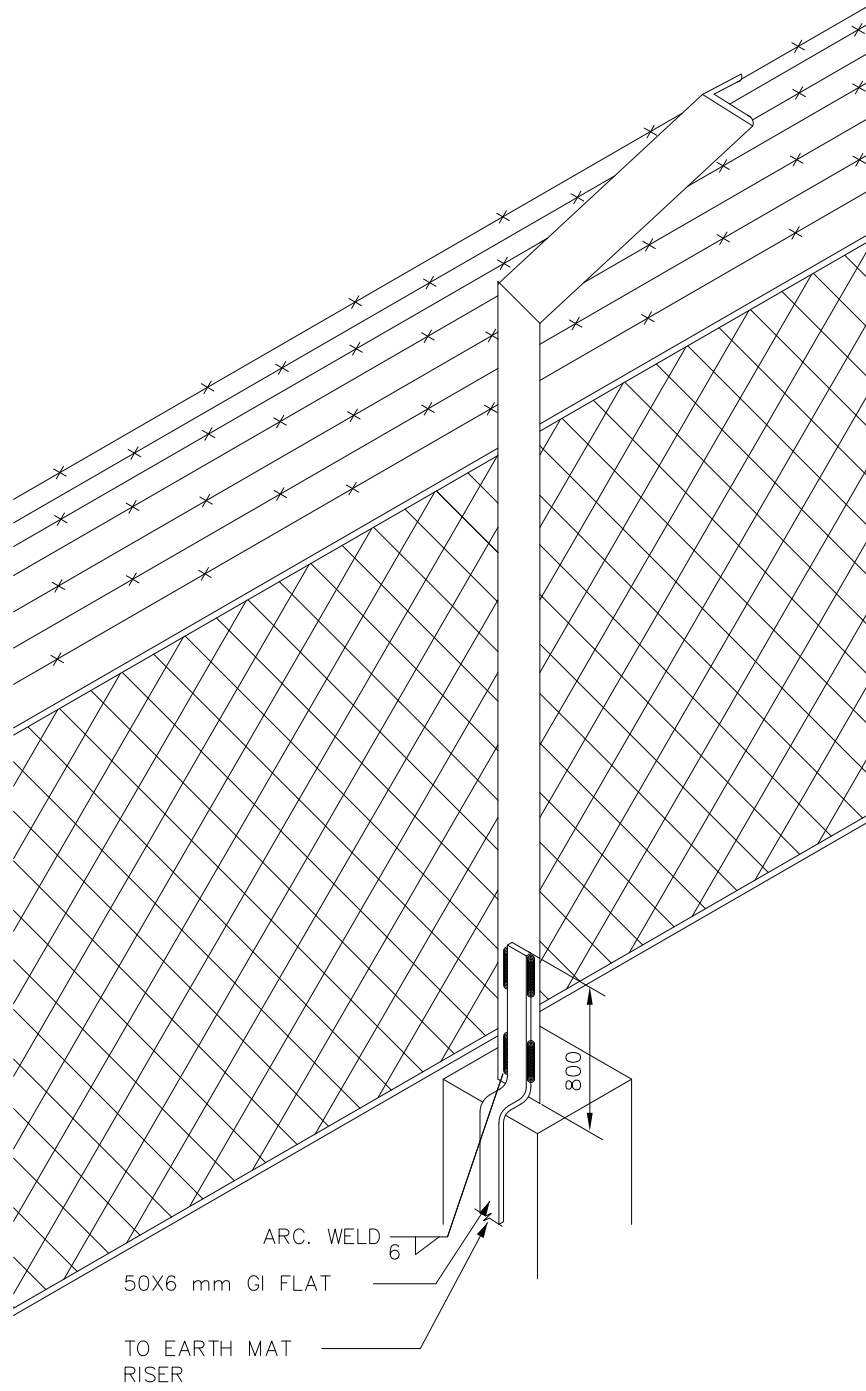
DETAIL - A

DRAWN	A.H	TITLE: - CABLE TRANCH/TRAY EARTHING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	



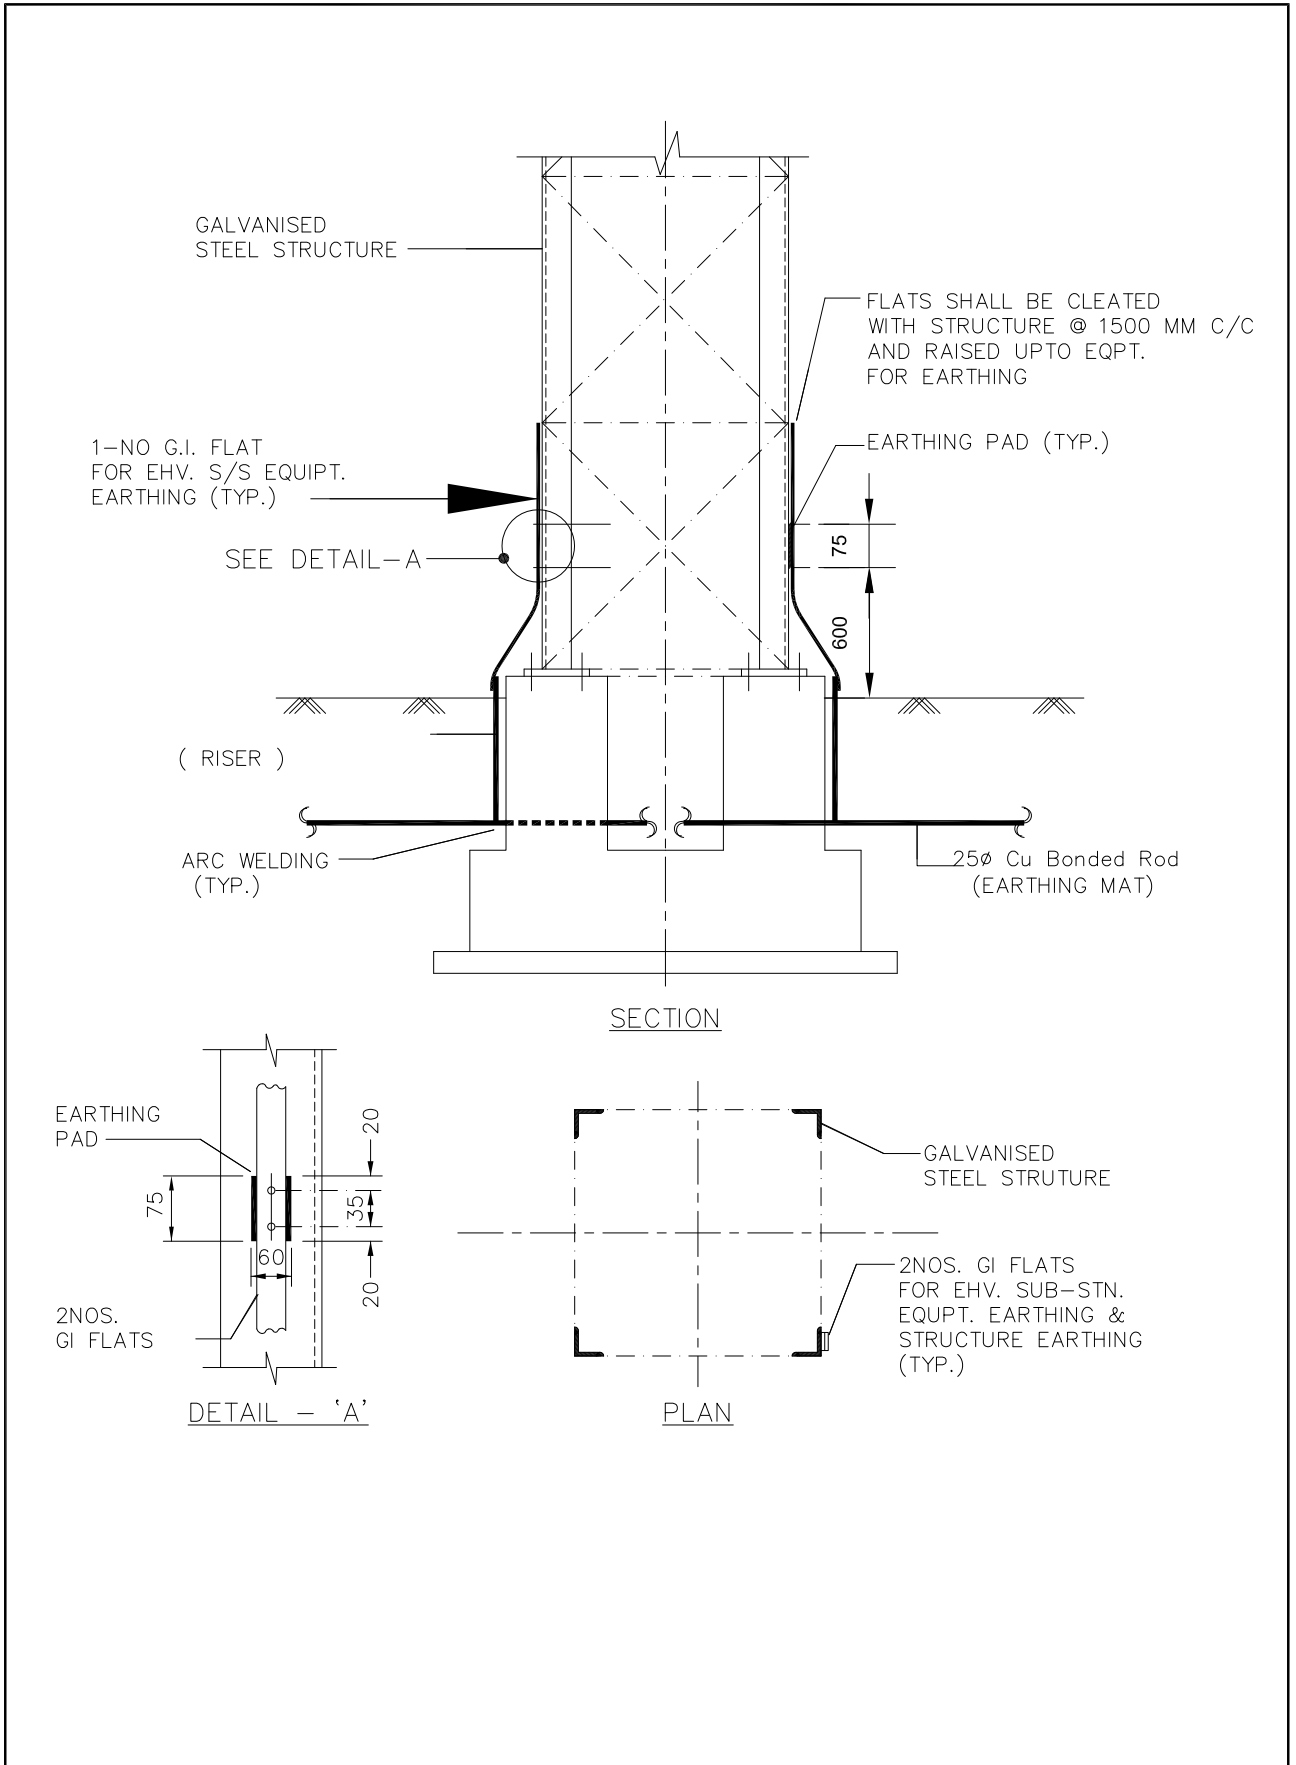


DRAWN	A.H	TITLE: - EARTHING OF STRUCTURE MOUNTED ELECTRICAL EQUIPMENT	
CHECKED	G.S		
APPD.	A.A		
DATE	17.10.17		
SCALE	NTS		




DRAWN	A.H	TITLE:— FENCE EARTHING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

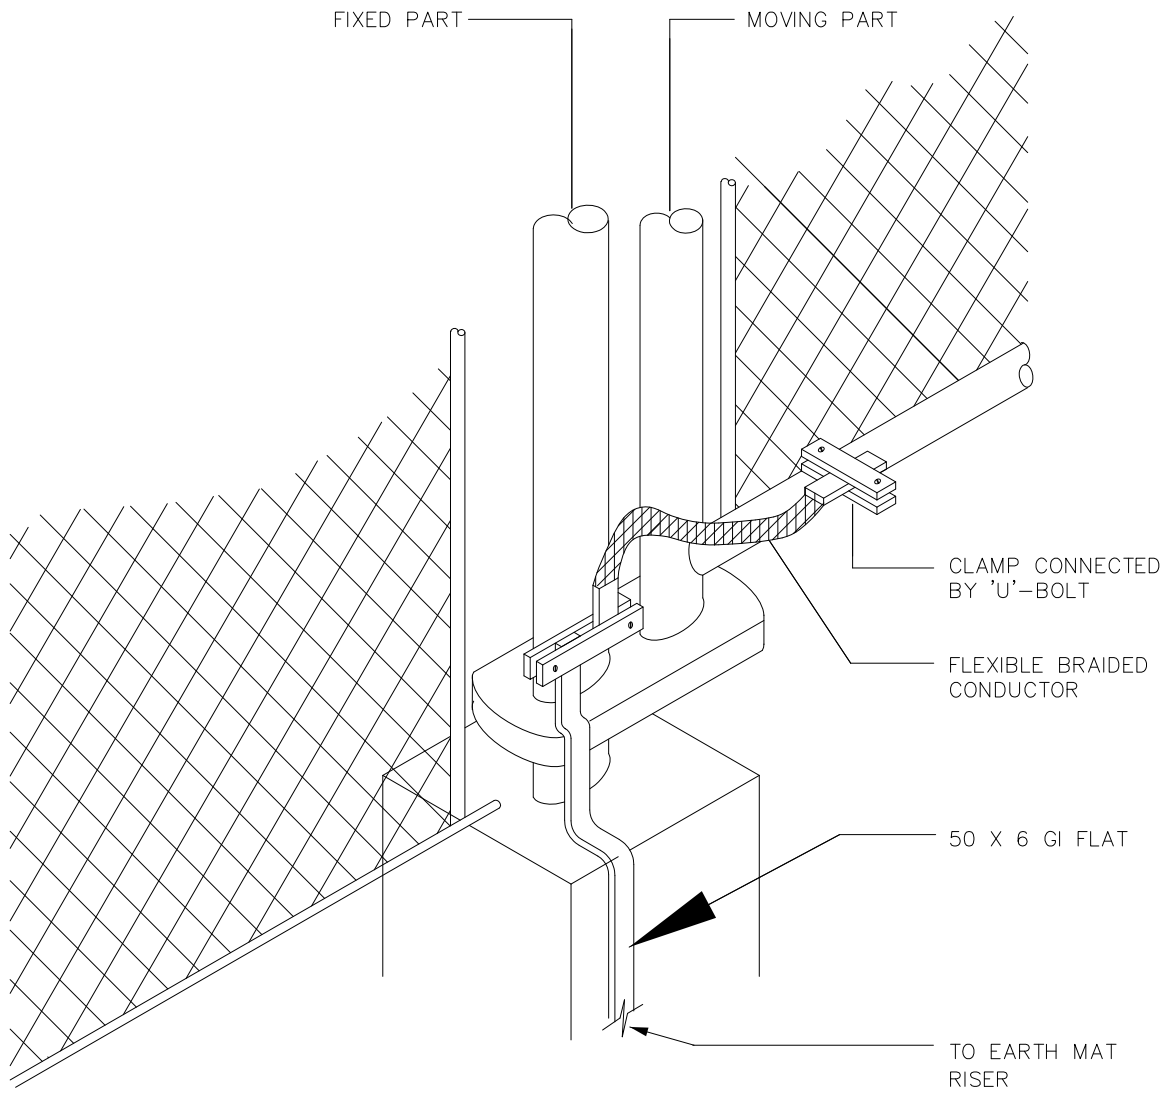


DRAWN	A.H	TITLE: - FENCE GATE EARTHING
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

BSES
BSES Yamuna Power Limited

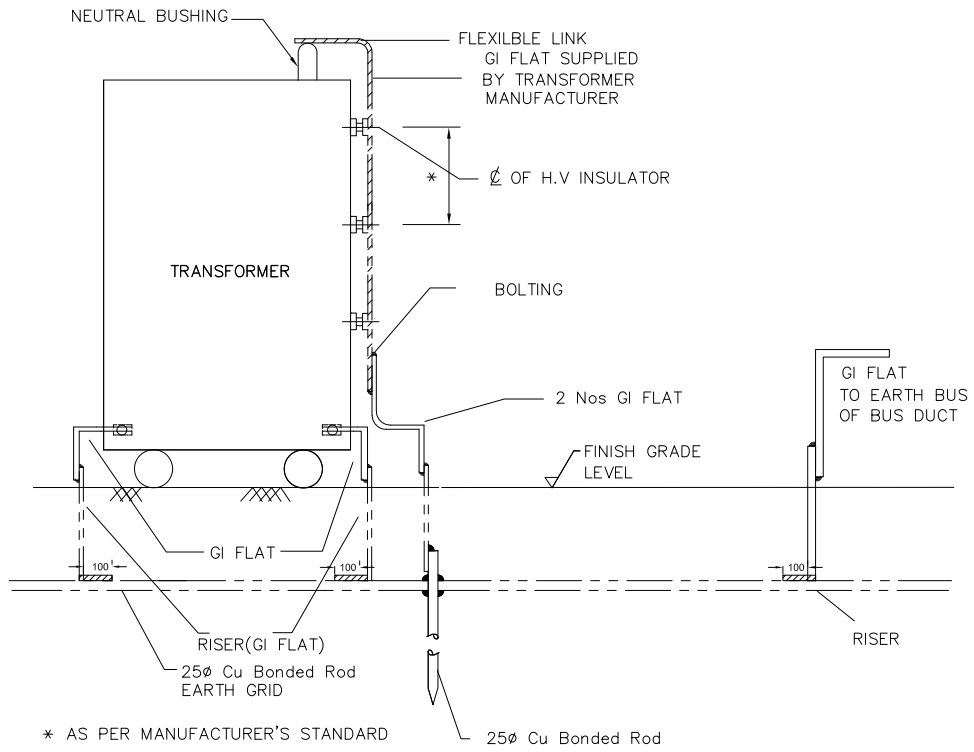


NOTE: APPLICABLE TO EHV WINDINGS AND LV (415V) WINDINGS OF TRANSFORMERS REQUIRING DIRECT EARTHING OF NEUTRALS.

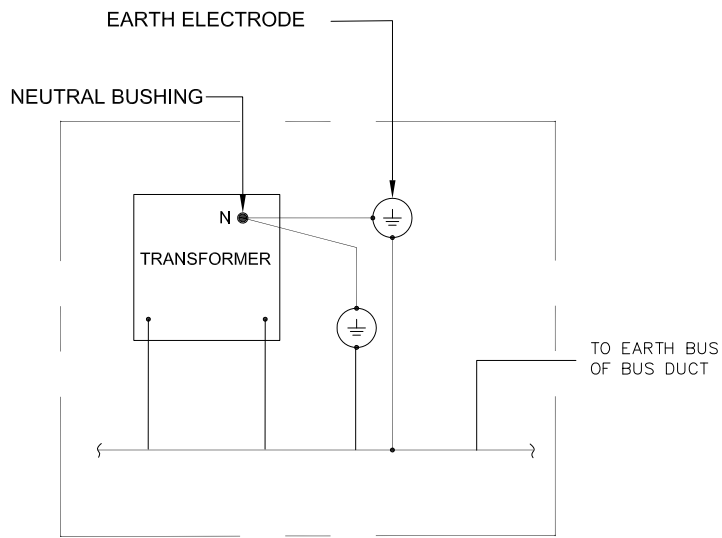

LINE DIAGRAM
SOLID NEUTRAL EARTHING

DRAWN	A.H	TITLE: - TRANSFORMER NEUTRAL EARTHING (DIRECT)
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	


BSES
BSES Yamuna Power Limited

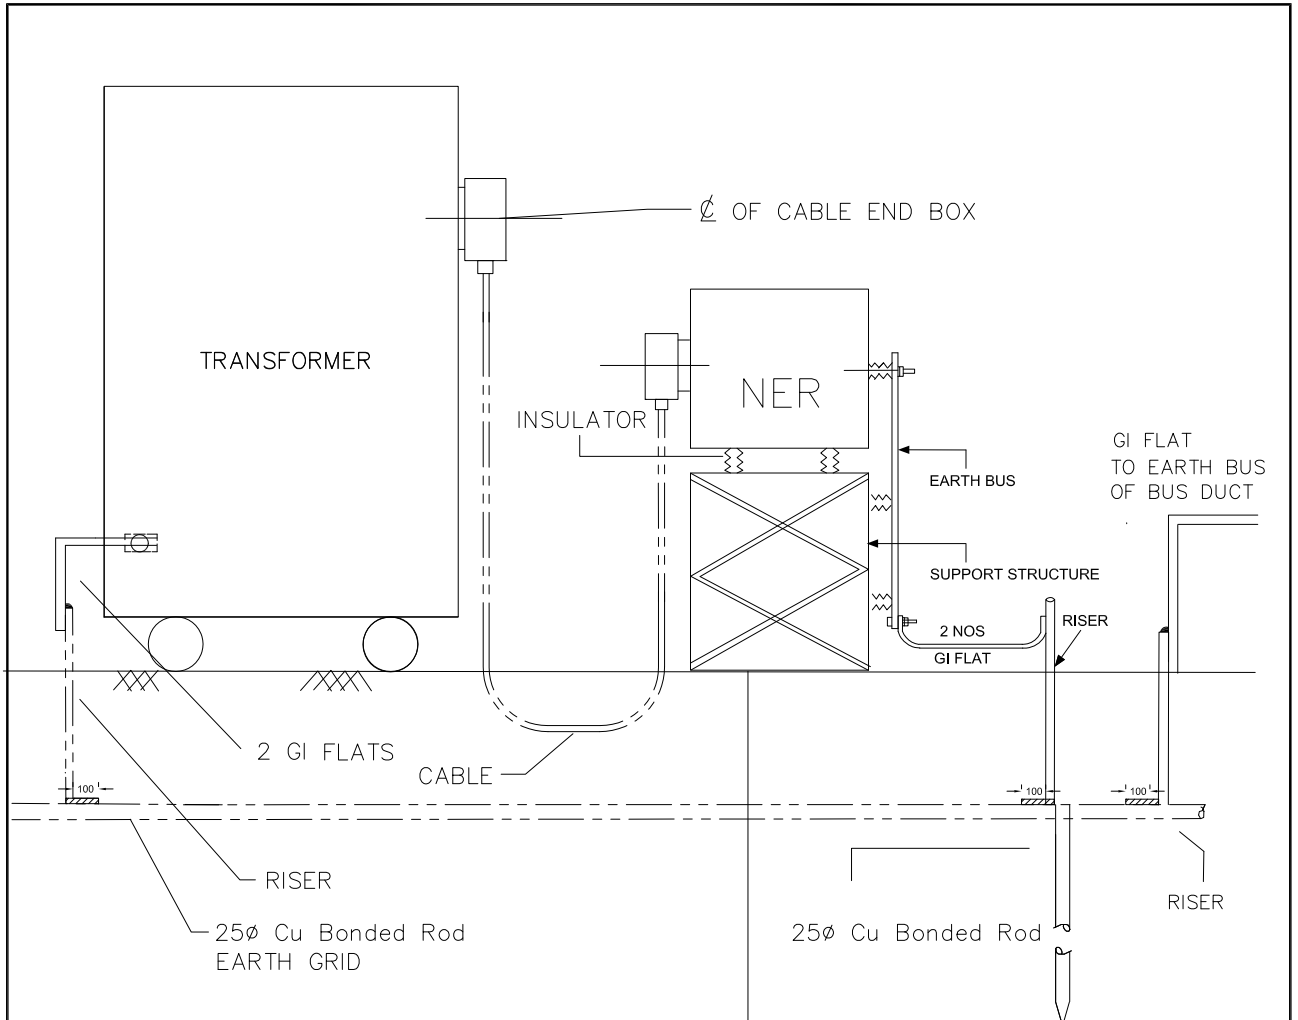

NOTES

1. APPLICABLE to MV(3.3KV,6.6KV,11KV WINDING)

STRUCTURE EARTHING AS PER SHEET 30

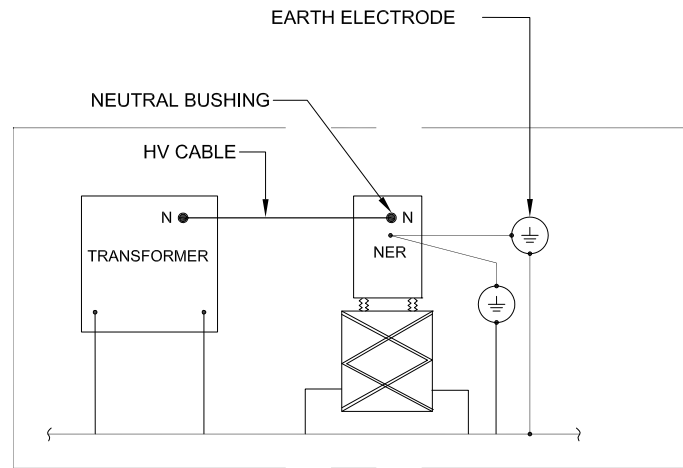

LINE DIAGRAM

NEUTRAL EARTHING THROUGH NGR

DRAWN	A.H	TITLE: - TRANSFORMER NEUTRAL EARTHING (THROUGH NGR)
CHECKED	G.S	
APPD.	A.A	
DATE	17.10.17	
SCALE	NTS	

